



DCS-1000 Internet Camera and DCS-1000W Internet Camera with 11Mbps Wireless LAN.

## Internet Camera

The DCS-1000 series Internet Camera is a standalone system connecting directly to an Ethernet or Fast Ethernet network. This camera also supports wireless transmission based on the IEEE 802.11b standard.

### All-in-one System

This Internet Camera is different from conventional PC cameras in that it is an all-in-one system with built-in CPU and web-based solutions. The camera provides a low cost solution for transmission of high quality video images for monitoring. It can be managed remotely, accessed and controlled from any desktop or notebook PC over the Intranet or Internet via a web browser.

### Image Monitoring From Multiple Users

Up to 64 users can log onto the camera at the same time to monitor images. The camera utilizes the JPEG image compression technology, providing high quality images for users. JPEG is adopted since it is a standard for image compression and can be applied to various web browser and application software without the need to install extra software.

### Flexible Wireless Transmission Range

Model DCS-1000W camera comes with a wireless LAN interface. The antenna of this wireless camera can be changed for a variety of reasons such as extending the wireless transmission range. Generally the wireless distance can go up to 100 meters indoors and up to 300 meters outdoors. The range are limited by the number of walls, ceilings, or other objects that the wireless

signals must pass through. Typical ranges vary depends on the types of materials and background Radio Frequency (RF) noise in your home or business and the configuration setting of your network environment.

### Image Capture and Recording

You can capture images as snapshots of single images from the IPView application supplied with the CD-ROM of the camera.

### Indoor Installation

The Internet camera is designed for use indoors. It is not weatherproof, and needs to be equipped with a weatherproof case to be used outdoors.

### Connection to Ethernet-based Server

The camera provides a 10/100Mbps port, allowing connection to a Fast Ethernet server. The camera can be connected to a LAN with private IP addresses.

### Firewall Installation

If a firewall exists on the network, port 80 is open for ordinary data communication. However, since the camera transmits image data, the default port 8481 is also required. It is necessary to open port 8481 of the network for remote users to access the camera.

### Features

- Stand-alone Internet camera with CPU & RAM, no need to attach to PC
- Supports ActiveX control for Internet Explorer, Java applets, Netscape Navigator
- Remote access from web browser for live image viewing
- Operates in Windows, MacOS environments
- Connection to external devices for alarm-based events when trigger is activated
- Implemented for intruder detection with still image capture & e-mails notice
- Powerful IPView software for image capture

# DCS-1000/1000W

## Technical Specifications

## Internet Camera

### Video Specifications

**Resolution**

640 x 480 pixel

**Sensor**

1/3" color CMOS sensor

**Gain control**

Automatic

**Exposure**

Automatic

**White Balance**

Automatic

**Shutter**

Electronics 1/60 ~ 1/15000 secretary

**Minimum Illumination**

2.5lux@f1.4, 3000K Color

**Focal Length**

6.0 mm

**Aperture**

F=1.8

**Focus Extent**

20 cm - ∞

**Lens mounting**

Fixed board lens, CS-mount type

### Image (Video Setting)

**Image compression**

JPEG

**Frame rate**

30fps@QCIF, 20fps@CIF, 3fps@VGA

**Compression Rate selection**

5 level (Very Low, Low, Medium, High, Very High)

**Frame rate setting**

1, 5, 7, 15, 20, auto (depends on the video format)

**Video resolution**

160x120, 320x240, 640x480

**Brightness control**

Range 1- 128

**Contrast control**

Range 1- 128

**Hue control**

Range 1- 128

### System Hardware

**LAN Connector**

One RJ-45 port to connect to 10/100Mbps Ethernet, auto-sensed, wireless

**Wireless LAN (DCS-1000W only)**

Built-in 802.11b wireless LAN module (Wi-Fi™ compliant)

**Generic I/O Port**

4 I/O ports, 2 for input, and 2 for output

**LED Indicator**

- Power LED (Blue)
- LAN/WLAN Activity LED (Orange)

**Slide Switch**

LAN/LAN&WLAN/WLAN (DCS-1000W only)

**Antenna Connectors**

2 connectors (DCS-1000W only)

### Communication Support

**Wireless LAN Encryption**

64 bit, 128 bit or OFF

**Communication Protocols**

HTTP, FTP, TCP/IP, UDP, ARP, ICMP, BOOTP, RARP, DHCP, PPPoE

### System Requirements

**Browser Support**

- Internet Explorer 5.0 or above (ActiveX & JAVA Mode - View Image for windows OS and JAVA Mode-View Image for other OS)
- CPU: Pentium II, 266 MHz or above
- Memory Size: 32 MB (64 MB recommended)
- VGA card resolution: 800x600 or above
- Netscape 6.0 or above (JAVA Mode - View Image)

**IPView Application**

- Win 98, Win 98 SE, Win 2000, Win Me, Win XP
- Pentium III, 450 MHz or above
- Memory Size of 128 MB (256 MB Recommended)
- VGA card resolution of 800x600 or above

### Physical & Environmental

**Power Supply**

DC 5V/2.4A, switching type

**Power Consumption**

6.5 Watt (1300mA x 5V)

**Operating temperature**

5°C ~ 50°C

**Storage temperature**

-25°C ~ 50°C

**Humidity**

5% ~ 95% non-condensing

**EMI Certification**

- FCC Class A
- CE Class A
- VCCI Class A

### Ordering Information

**Internet Camera**

**DCS-1000** With 10/100Mbps Fast Ethernet Port

**DCS-1000W** With 10/100Mbps Fast Ethernet Port + IEEE 802.11b Wireless LAN

# D-Link®

Specifications subject to change without prior notice.  
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

<b>U.S.A.</b>	TEL: 1-949-788-0805	FAX: 1-949-753-7033	www.dlink.com
<b>Canada</b>	TEL: 1-905-8295033	FAX: 1-905-8295095	www.dlink.ca
<b>Europe</b>	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	www.dlink.co.uk
<b>U.K.</b>	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	www.dlink.co.uk
<b>Germany</b>	TEL: 49-6196-77990	FAX: 49-6196-7799300	www.dlink.de
<b>France</b>	TEL: 33-1-30238688	FAX: 33-1-30238689	www.dlink-france.fr
<b>Benelux</b>	TEL: 31-40-2668713	FAX: 31-40-2668666	www.dlink-benelux.nl
<b>Italy</b>	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	www.dlink.it
<b>Iberia</b>	TEL: 34-93-4090770	FAX: 34-93-4910795	www.dlinkiberia.es
<b>Sweden</b>	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	www.dlink.se
<b>Norway</b>	TEL: 47-22-991890	FAX: 47-22-207039	www.dlink.no
<b>Denmark</b>	TEL: 45-43-969040	FAX: 45-43-424347	www.dlink.dk
<b>Finland</b>	TEL: 358-9-622-91660	FAX: 358-9-622-91661	www.dlink-fi.com
<b>Singapore</b>	TEL: 65-774-6233	FAX: 65-774-6322	www.dlink-intl.com
<b>Australia</b>	TEL: 61-2-94177100	FAX: 61-2-94171077	www.dlink.com.au
<b>Japan</b>	TEL: 81-3-5434-9678	FAX: 81-3-5434-9868	www.dlink.co.jp
<b>China</b>	TEL: 86-10-8809-7777	FAX: 86-10-8809-6789	www.dlink.cn
<b>India</b>	TEL: 91-22-652-6696	FAX: 91-22-652-8914	www.dlink-india.com
<b>Middle East</b>	TEL: 202-6356176	FAX: 202-6356192	www.dlink-me.com
<b>South America</b>	TEL: 56-2-232-3185	FAX: 56-2-232-0923	www.dlink.cl
<b>South Africa</b>	TEL: 27(0)126652165	FAX: 27(0)126652186	www.d-link.co.za
<b>Russia</b>	TEL: 7-095-737-3389	FAX: 7-095-737-3390	www.dlink.ru
<b>Taiwan</b>	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515	www.dlinktw.com.tw
<b>D-Link Corp.</b>	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299	www.dlink.com.tw




RECYCLABLE


Rev. 01 (Apr. 2002)

Printed in Taiwan


### SOHO

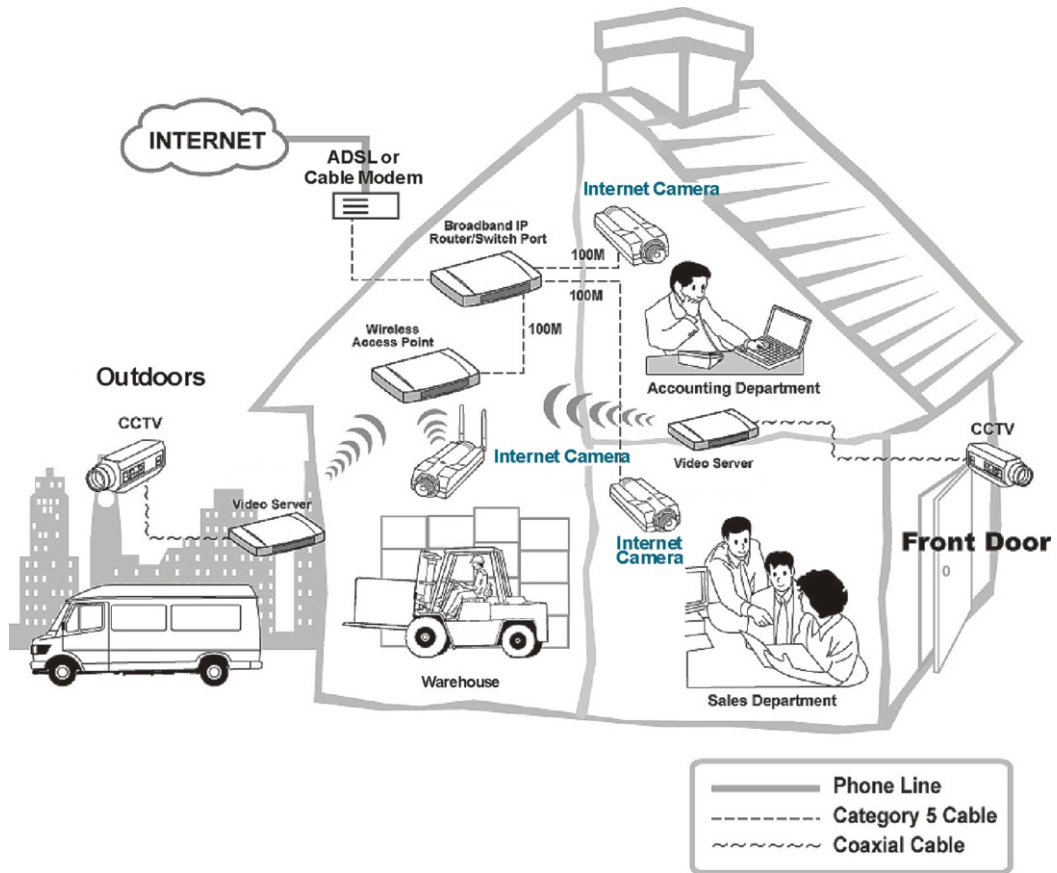

### HOME

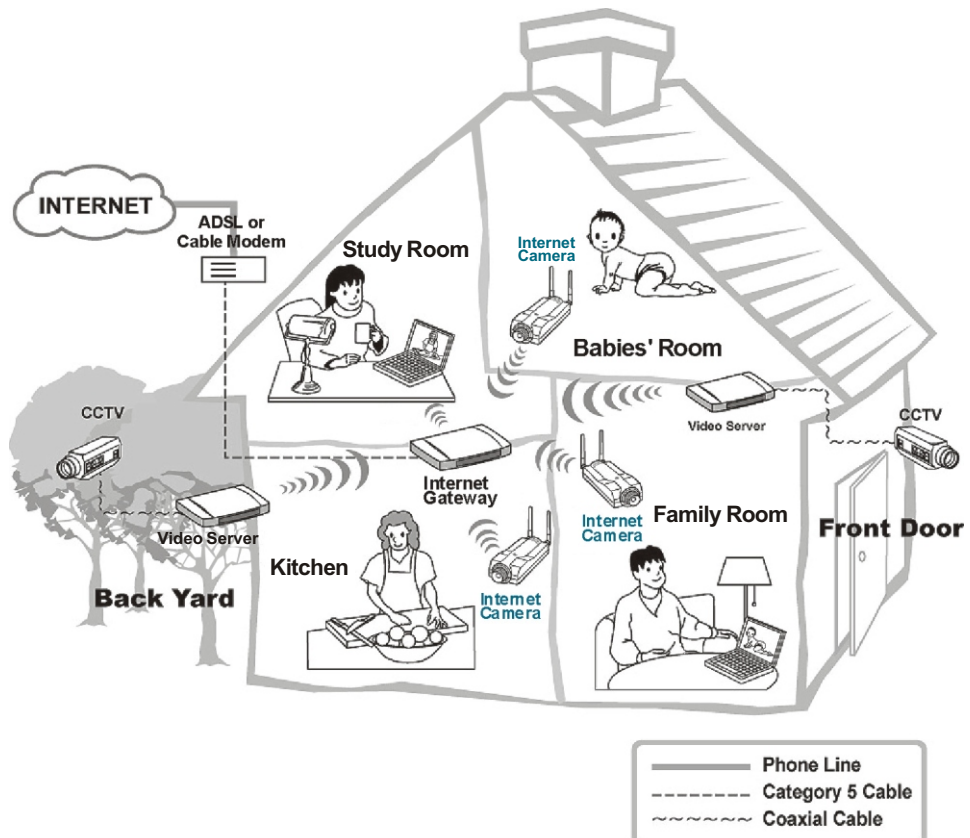

### ENTERPRISE

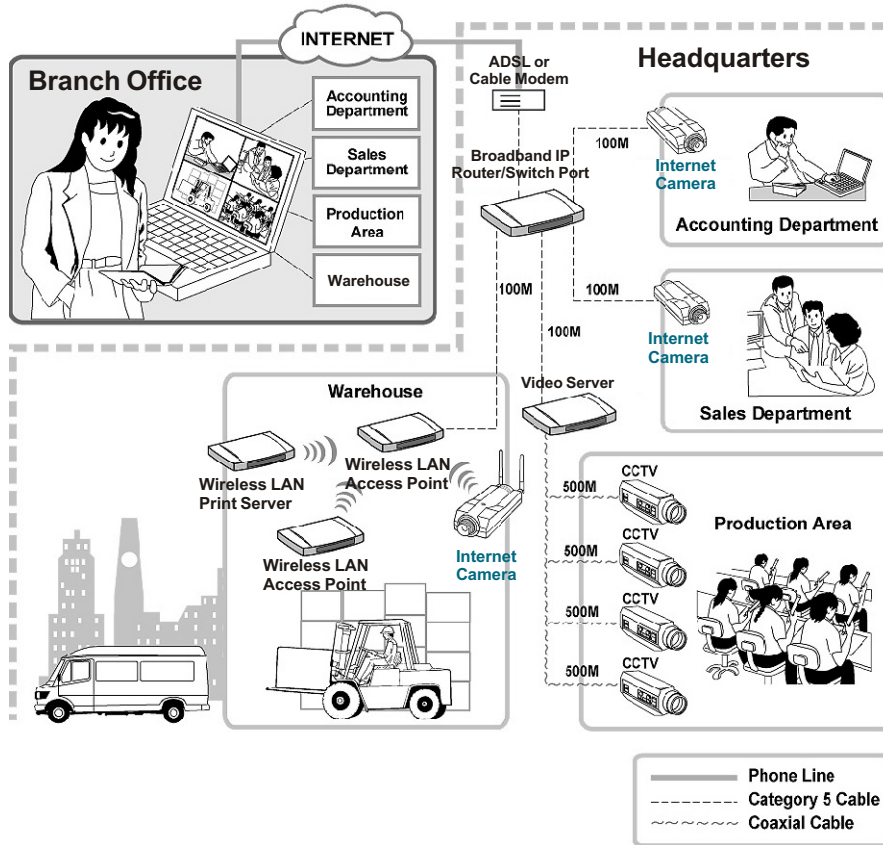

### SURVEILLANCE

