

A little peace of mind goes a long way



A mydlink™ camera is the simplest way to set up a camera at home that can be securely viewed anywhere, anytime over the Internet via your smartphone, tablet or computer. You can do it yourself and there are no monthly charges or other hidden fees.






mydlink™ Cloud Services is a revolutionary cloud-based technology that's been trusted and used by over 2 million people worldwide to provide a secure yet easy to set up method to connect to cameras, storage, routers at home, from anywhere at any time.





Because a little peace of mind goes a long way. Make sure your home is secure when you are away. Check that your children get home safely¹. No need to worry as you will receive e-mail and push alerts if sound or motion is detected.



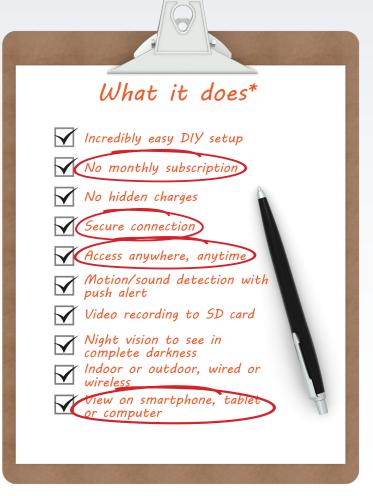



mydlink Cameras Comparison Table

























										2000			
Model	DCS-930L Cloud Camera	DC5-932L Day/Night Cloud Camera	DCS-933L Day/ Night Cloud Camera	DCS-942L Enhanced Day/ Night Cloud Camera	DCS-2132L HD Wireless Cloud Camera	DCS-2136L HD Wireless AC Day/Night Camera with Colour Night Vision	DCS-2310L Outdoor HD PoE Day/Night Cloud camera	DCS-2332L Outdoor HD Wire- less Day/Night Cloud Camera	DCS-5020L Wireless N Day & Night Pan/Tilt Cloud Camera	DCS-5222L Pan/Tilt/Zoom Cloud Camera	DCS-6004L HD PoE Mini Dome Cloud Camera	DCS-6010L 2-Megapixel Panoramic Wireless Cloud Camera	DCS-7010L Outdoor HD Pol Day/Night Fixed Mini Bullet Cloud Camera
Indoor / outdoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Outdoor	Outdoor	Indoor	Indoor	Indoor	Indoor	Outdoor
Image sensor	1/5"VGA progressive scan CMOS	1/5"VGA progressive scan CMOS	1/5"VGA progressive scan CMOS	1/5" VGA progressive scan CMOS	1/4"1 megapixel progressive scan CMOS	1/3"1 megapixel progressive scan CMOS	1/4"1 megapixel progressive scan CMOS	1/4" megapixel progres- sive scan CMOS	1/5" megapixel Progressive scan CMOS	1/4" megapixel Progressive scan CMOS	1/4"1 megapixel pro- gressive scan CMOS	1/3.2"2 megapixel pro- gressive scan CMOS	1/4" 1 megapixel progressive scan CM
Maximum video resolution	VGA 640 x 480	VGA 640 x 480	VGA 640 x 480	VGA 640 x 480	HD 720p 1280 x 720	HD 720p 1280 x 720	HD 720p 1280 x 720	HD 720p 1280 x 720	VGA 640 x 480	HD 720p 1280 x 720	HD 720p 1280 x 720	UXGA 1600 x 1200	HD 720p 1280 x 720
Lens	Fixed 5.01 mm, F2.8	Fixed 5.01 mm, F2.8	Fixed 3.15 mm, F2.8	Fixed 3.15 mm, F2.8	Fixed 3.45 mm, F2.0	Fixed 3.6 mm, F1.4	Fixed 3.45 mm, F2.0	Fixed 3.45 mm, F2.0	Fixed 2.2 mm, F2.0	Fixed 4.57 mm, F1.9	Fixed 2.8 mm, F1.8	Fixed 1.25 mm, F2.0 fisheye	Fixed 4.3 mm, F2.
Angle of view (H/V)	45.3°/34.5°	45.3° / 34.5°	45.3° / 34.5°	45.3° / 34.5°	57.8° / 37.8°	64° / 46.5°	57.8° / 37.8°	57.8° / 37.8°	66.22° / 49.08°	45.7° / 29.5°	75.2° / 48.2°	180° / 180°	47° / 37°
Lowlight+ to see in low light conditions with illumination						•							
Night vision support		• (IR LED)	• (IR LED)	• (IR LED)	• (IR LED)	(white light)	• (IR LED)	• (IR LED)	• (IR LED)	• (IR LED)	• (IR LED)		• (IR LED)
Night vision illumination distance		5 m	5 m	5 m	5 m	5 m	5 m	5 m	8 m	5 m	5 m		10 m
PIR (Passive Infrared) sensor for enhanced				•	•	•	•	•	•	•			
motion detection Motorised Pan/Tilt									•	•			
Preset Pan/Tilt locations for quick access									•	•			
Privacy masks to keep specific areas of the					3 zones	3 zones	3 zones	3 zones	-	3 zones	3 zones	3 zones	5 zones
image private				•	5 2011es	5 2011es	3 201163	5 2011es		3 201163	3 201163	5 201les	
2-way audio	_	_	_						_	_	-		•
Built-in microphone	•	•	•	•	•	•	•	•	•	•	•	•	
Built-in speaker					•	•	•	•		•		•	•
External speaker connection				•							•		•
Network connectivity	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernet and Wireless 802.11b/g/n/ac	Wired Ethernet with PoE support	Wireless 802.11b/g/n	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernet with PoE support	Wired Ethernet and Wireless 802.11b/g/n	Wired Ethernetwi PoE support
Built-in wireless extender (max. 5 clients)			•						•				
Digital Input/Output to connect to external alarms or sensors					1/1	1/1				1/1			1/1
Onboard SD card slot for recording (memory card not included unless specified)				MicroSD SDHC (16GB included, max. 32GB)	MicroSD SDHC (max. 32GB)	MicroSD SDHC (16GB included, max. 32GB)	MicroSD SDHC (max. 32 GB)	MicroSD SDHC (max. 32 GB)		MicroSD SDHC (max. 32 GB)	MicroSD SDHC (max. 32GB)	MicroSD SDHC (max. 32GB)	MicroSD SDHC (max. 32GB)
Video format	MJPEG	MJPEG	H.264, MJPEG	H.264, MPEG-4, MJPEG	H.264, MPEG-4, MJPEG	H.264, MPEG-4, MJPEG	H.264, MPEG-4, MJPEG	H.264, MPEG-4, MJPEG	H.264, MJPEG	H.264, MPEG-4, MJPEG	H.264, MPEG-4, MJPEG	H.264, MPEG-4, MJPEG	H.264, MPEG-4 MJPEG
Digital zoom	4x	4x	4x	4x	10x	10x	10x	10x	4x	4x	10x	10x	4x
Motion detection	•	•	•	•	•	•	•	•	•	•	•	•	•
Sound detection			•						•				
Motion/sound detected event recording to onboard storage if memory card is installed				•	•	•	•	•		•	•	•	•
Motion/sound detected event recording to Network Attached Storage (NAS)					•	•	•	•		•	•	•	•
Motion/sound detected event recording to D-Link Network Video Recorder (NVR) or NAS that supports Surveillance Center application	•	•	•	•	•	•	•	•	•	•	•	•	•
E-Mail Notification with snapshot	•	•	•	•	•	•	•	•	•	•	•		