

D-Link *AirPlus* G+

DI-824VUP+

High-Speed Enhanced 2.4 GHz
Wireless VPN Router

Manual

D-Link[®]

Building Networks for People

1/19/2004

Contents

Package Contents	3
Introduction	4
Wireless Basics	6
Getting Started	9
Using the Configuration Menu	11
Installing the Print Server Software	68
Configuring on Windows 98se/Me Platforms	70
Networking Basics	72
Reset to Factory Default Settings	101
Technical Specifications	102
Frequently Asked Questions	103
Contacting Technical Support	152
Warranty and Registration	153

Package Contents



Contents of Package:

- **D-Link AirPlus G+ DI-824VUP+** High-Speed Enhanced 2.4GHz Wireless VPN Router
- Power Adapter - 5V DC / 2.5A
- Manual on CD
- Quick Installation Guide

Note: Using a power supply with a different voltage rating than the one included with the DI-824VUP+ will cause damage and void the warranty for this product.

If any of the above items are missing, please contact your reseller.

System Requirements For Configuration:

- Ethernet-Based Cable or DSL Modem
- Computer with Windows, Macintosh, or Linux-based operating system with an installed Ethernet adapter
- Internet Explorer version 6.0 or Netscape Navigator version 6.0 and above, with JavaScript enabled

Introduction


The D-Link *AirPlus G+* DI-824VUP+ Wireless Broadband Router is an enhanced 802.11b high-performance, wireless router with a printer port. It is an ideal way to extend the reach and number of computers connected to your wireless network.

Unlike most 802.11g routers, the DI-824VUP+ is capable of data transfer speeds up to 54 Mbps (compared to the standard 11 Mbps) when used with other D-Link *AirPlus Xtreme G* products such as the DWL-G650 and DWL-G520 Wireless Adapters.

After completing the steps outlined in the *Quick Installation Guide* (included in your package) you will have the ability to share information and resources, as well as share a printer wirelessly on your network.

The DI-824VUP+ is compatible with most popular operating systems, including Macintosh, Linux and Windows, and can be integrated into a large network. This Manual is designed to help you connect the Router and D-Link *AirPlus 2.4GHz Wireless Adapters* into a network in Infrastructure mode. *Please take a look at the **Getting Started** section in this manual to see an example of an Infrastructure network using the DI-824VUP+.*

Connections

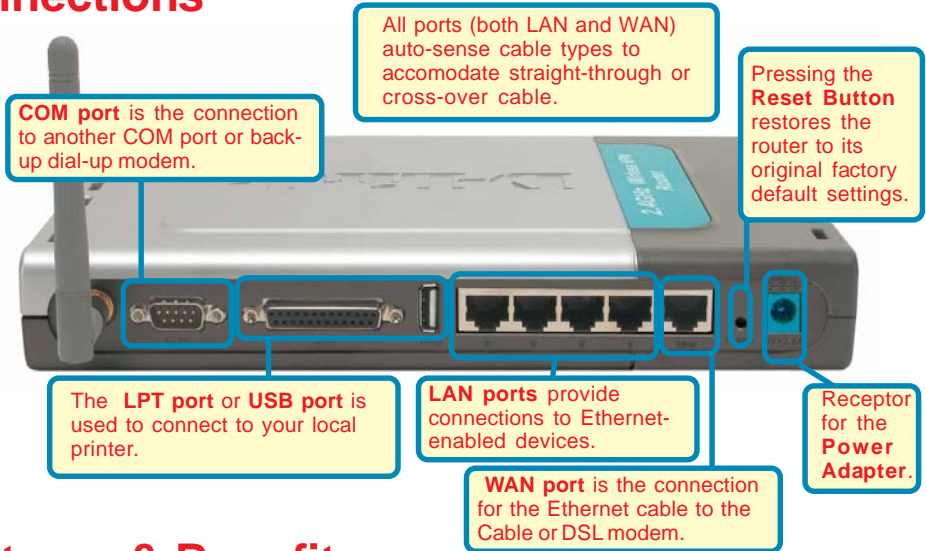

Features & Benefits

- Connects multiple computers to an Ethernet Broadband (Cable or DSL) modem to share the Internet connection
- Supports VPN pass-through, providing added security
- Advanced Firewall features for added network security
- DHCP server support enables all networked computers to automatically receive IP addresses
- Wireless connection of up to 54Mbps
- Web-based interface for Management
- Access Control to manage users on the network
- Maximum reliability, throughput and connectivity with automatic data rate switching
- Stronger network security with 256-bit encryption
- Printer port enables connection to a network printer
- WAN and LAN ports auto detect cable types (straight-through or cross-over)
- UPnP supported



Note: Please refer to the *Resetting the DI-824VUP+ to the Factory Default Settings* section in this manual for instructions on how to use the Reset button.

LEDS

LED stands for **L**ight-**E**mitting **D**iode. The **DI-824VUP+** has the following LEDs as described below:

LED	LED Activity
Power	A steady light indicates a connection to a power source
WAN	A solid light indicates connection on the WAN port. This LED blinks during data transmission
Status	Flashes once per second to indicate the unit is working properly
COM	A steady light indicates a connection to COM port or back-up dial-up modem
USB	A steady light indicates a connection to a USB device
LPT	A steady light indicates a connection to a parallel printer port
WLAN	A blinking light indicates that the wireless segment is ready. This LED blinks during wireless data transmission.
LOCAL NETWORK (Ports 1-4)	A solid light indicates a connection to an Ethernet-enabled computer on ports 1-4. This LED blinks during data transmission.

Wireless Basics

D-Link *AirPlus* wireless products are based on industry standards to provide easy-to-use and compatible high-speed wireless connectivity within your home, business, or public access wireless networks. Strictly adhering to the IEEE standard, the D-Link *AirPlus* wireless family of products will allow you to securely access the data you want, when and where you want it. You will be able to enjoy the freedom that wireless networking delivers.

A wireless local area network (WLAN) is a cellular computer network that transmits and receives data with radio signals instead of wires. Wireless LANs are used increasingly in both home and office environments, and public areas such as airports, coffee shops, and universities. Innovative ways to utilize WLAN technology are helping people to work and communicate more efficiently. Increased mobility and the absence of cabling and other fixed infrastructure have proven to be beneficial for many users.

Wireless Basics

Wireless users can use the same applications they use on a wired network. Wireless adapter cards used on laptop and desktop systems support the same protocols as Ethernet adapter cards.

Under many circumstances, it may be desirable for mobile network devices to link to a conventional Ethernet LAN in order to use servers, printers, or an Internet connection supplied through the wired LAN. A Wireless Router is a device used to provide this link.

People use wireless LAN technology for many different purposes:

Mobility - Productivity increases when people have access to data in any location within the operating range of the WLAN. Management decisions based on real-time information can significantly improve worker efficiency.

Low Implementation Costs - WLANs (Wireless Local Area Networks) are easy to set up, manage, change, and relocate. Networks that frequently change, both physically and logically, can benefit from WLANs ease of implementation. WLANs can operate in locations where installation of wiring may be impractical.

Installation Speed and Simplicity - Installing a wireless LAN system can be fast, easy, and can eliminate the need to pull cable through walls and ceilings.

Network Expansion - Wireless technology allows the network to go where wires cannot.

Scalability - Wireless Local Area Networks (WLANs) can be configured in a variety of topologies to meet the needs of specific applications or existing infrastructure. Configurations are easily changed and range from peer-to-peer networks suitable for a small number of users to larger infrastructure networks to accommodate hundreds or thousands of users, depending on the number of wireless devices deployed.

Wireless Basics

The DI-824VUP+ is compatible with other **D-Link AirPlus Xtreme G 802.11g** products, which include:

- ◆ Enhanced 2.4GHz Wireless Cardbus Adapters used with laptop computers (DWL-G650)
- ◆ Enhanced 2.4GHz Wireless PCI cards used with desktop computers (DWL-G520)

Standards-Based Technology

Based on the IEEE **802.11g** standard, the DI-824VUP+ is interoperable with existing compatible 2.4GHz wireless technology with data transfer speeds of up to 54Mbps (with the D-Link *AirPlus* family of wireless devices,) as well as standard 802.11b technology (the D-Link *Air* family of wireless devices), with speeds of up to 11Mbps.

Installation Considerations

The D-Link *AirPlus G+* DI-824VUP+ lets you access your network, using a wireless connection, from virtually anywhere. Keep in mind, however, that the number, thickness, and location of walls, ceilings, or other objects that the wireless signals must pass through may limit the range. Typical ranges vary depending on the types of materials and background RF (radio frequency) noise in your home or business. The key to maximizing wireless range is to follow these basic guidelines:

1. Keep the number of walls and ceilings between the DI-824VUP+ and your receiving device (e.g., the DWL-G650) to a minimum-each wall or ceiling can reduce your D-Link *AirPlus* wireless product's range from 3-90 feet (1-30 meters.) Position your receiving devices so that the number of walls or ceilings is minimized.
2. Be aware of the direct line between routers and computers. A wall that is 1.5 feet thick (.5 meters), at a 45-degree angle appears to be almost 3 feet (1 meter) thick. At a 2-degree angle it looks over 42 feet (14 meters) thick! Try to make sure that devices are positioned so that the signal will travel straight through a wall or ceiling for better reception.
3. Building Materials make a difference - a solid metal door or aluminum studs may have a negative effect on range. Try to position wireless devices and computers with wireless adapters so that the signal passes through drywall or open doorways and not other materials.
4. Keep your product away (at least 3-6 feet or 1-2 meters) from electrical devices or appliances that generate RF noise.

Getting Started

With its default settings, the DI-824VUP+ will connect with other D-Link *Air* or *AirPlus* products, right out of the box.

With a single IP Address from your Broadband Internet Service provider you can share the Internet with all the computers on your local network, without sacrificing speed or security, using D-Link *Air* networking products.

IP ADDRESS

Note: If you are using a DHCP-capable router in your network setup, such as the DI-824VUP+, you will not need to assign a static IP Address.

If you need to assign IP Addresses to the computers on the network, please remember that the **IP Address for each computer must be in the same IP Address range as all the computers in the network**, and the Subnet Mask must be exactly the same for all the computers in the network.

For example: If the first computer is assigned an IP Address of 192.168.0.2 with a Subnet Mask of 255.255.255.0, then the second computer can be assigned an IP Address of 192.168.0.3 with a Subnet Mask of 255.255.255.0, etc.

IMPORTANT: If computers or other devices are assigned the same IP Address, one or more of the devices may not function properly on the network.

An **Infrastructure** wireless network contains an Access Point. The **Infrastructure Network** example, shown here, contains the following D-Link network devices:

A wireless Broadband Router -

D-Link *AirPlus G+* DI-824VUP+

A laptop computer with a wireless adapter -

D-Link *AirPlus Xtreme G* DWL-G650

A desktop computer with a wireless adapter -

D-Link *AirPlus Xtreme G* DWL-G520

A Cable modem -

D-Link DCM-201


Getting Started

Please refer to the following sections of this manual for additional information about setting up a network:

Networking Basics - learn how to check and assign your IP Address; share printers and files.

Using the Configuration Menu - learn the settings for the DI-824VUP+, using the web-based interface.

Troubleshooting - learn how to check for common installation issues and other tips for troubleshooting.

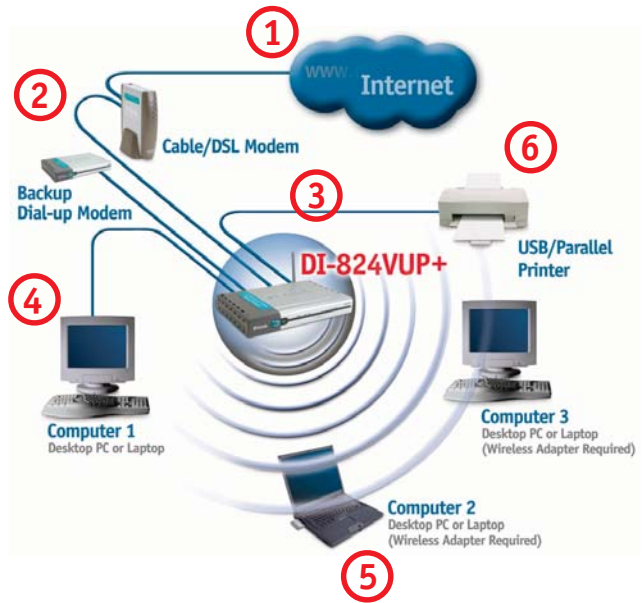

Please remember that **D-Link AirPlus** wireless devices are pre-configured to connect together, right out of the box, with their default settings.


For a typical wireless setup at home (as shown above), please do the following:

- 1** You will need broadband Internet access (a Cable or DSL subscription line into your home or office).
- 2** Consult with your Cable or DSL provider for proper installation of the modem.
- 3** Connect the Cable or DSL modem to the DI-824VUP+ wireless broadband router (See the Quick Installation Guide included with the DI-824VUP+.)
- 4** If you are connecting a desktop computer to your network, you can install the D-Link AirPlus Xtreme G DWL-G520 wireless PCI adapter into an available PCI slot. (See the Quick Installation Guide included with the DWL-G520.)
- 5** If you are connecting a laptop computer to your network, install the drivers for the wireless cardbus adapter (e.g., D-Link AirPlus Xtreme G DWL-G650) into a laptop computer. (See the Quick Installation Guide included with the DWL-G650.) (See the Quick Installation Guide included with the DWL-650+.)
- 6** Connect your printer to the printer port on the DI-824VUP+. Please refer to the quick installation guide for loading the print server software.

Using the Configuration Menu

Whenever you want to configure your network or the DI-824VUP+, you can access the Configuration Menu by opening the web-browser and typing in the IP Address of the DI-824VUP+. The DI-824VUP+ default IP Address is shown below:


- Open the web browser
- Type in the **IP Address** of the DI-824VUP+

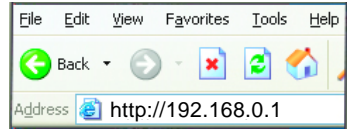

Note: if you have changed the default IP Address assigned to the DI-824VUP+, make sure to enter the correct IP Address.

The factory default **User name** is **admin** and the default **Password** is blank (empty). It is recommended that you change the admin password for security purposes. Please refer to **Tools > Admin** to change the admin password.

Home > Wizard

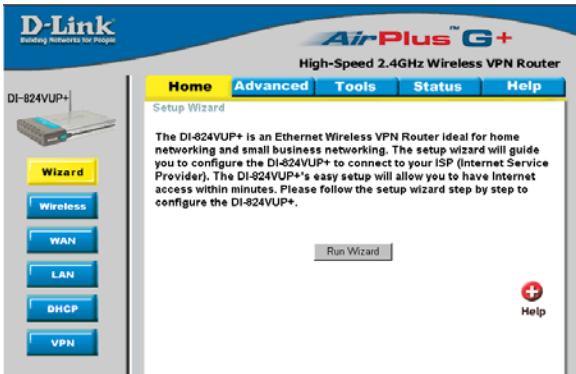

The Home>Wizard screen will appear. Please refer to the *Quick Installation Guide* for more information regarding the Setup Wizard.



Apply

Clicking **Apply** will save changes made to the page.



Cancel

Clicking **Cancel** will clear changes made to the page.



Help

Clicking **Help** will bring up helpful information regarding the page.



Restart

Clicking **Restart** will restart the router. (Necessary for some changes.)

Using the Configuration Menu

Home > Wireless



SSID

default is the default setting. All devices on the network must share the same SSID. If you change the default setting, the SSID may be up to 32 characters long.

Channel

6 is the default channel. All devices on the network must share the same channel.

WEP

Click *Enabled* or *Disabled* (default).

WEP Encryption

Select the level of encryption desired: 64, 128, or 256-bit.

- 64-bit** Requires 10 digits
- 128-bit** Requires 26 digits
- 256-bit** Requires 58 digits

Keys 1-4

Input up to 4 WEP keys using Hexadecimal format; select the one you wish to use.

Hexadecimal digits consist of the numbers 0-9 and the letters A-F.



WEP (Wired Equivalent Privacy) If you enable encryption on the DI-824VUP+, make sure to also enable encryption on all 802.11b wireless clients, or wireless connection will not be established.

Using the Configuration Menu

Home > Wireless

D-Link Building Networks for People

AirPlus™ G+ High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Wizard
Wireless
WAN
LAN
DHCP
VPN

Home Advanced Tools Status Help

Wireless Settings
These are the wireless settings for the AP(Access Point) portion.

Network ID(SSID) default
Channel 6
Security 802.1X

802.1X Settings
Encryption Key Length 64 bits
RADIUS Server IP 0.0.0.0
RADIUS port 1812
RADIUS Shared Key

Apply Cancel Help

D-Link Building Networks for People

AirPlus™ G+ High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Wizard
Wireless
WAN
LAN
DHCP
VPN

Home Advanced Tools Status Help

Wireless Settings
These are the wireless settings for the AP(Access Point) portion.

Network ID(SSID) default
Channel 6
Security WPA-PSK
Key Mode ASCII
Preshare Key

Apply Cancel Help

D-Link Building Networks for People

AirPlus™ G+ High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Wizard
Wireless
WAN
LAN
DHCP
VPN

Home Advanced Tools Status Help

Wireless Settings
These are the wireless settings for the AP(Access Point) portion.

Network ID(SSID) default
Channel 6
Security WPA

802.1X Settings
RADIUS Server IP 0.0.0.0
RADIUS port 1812
RADIUS Shared Key

Apply Cancel Help

802.1x

The 802.1x is an authentication method which is designed to compliment the existing WEP encryption. During the authentication process, the server verifies the identity of the client attempting to connect to the network. With the proper client account and encryption key, access to the network is granted. Unfamiliar encryption key or clients are denied from accessing the wireless network. This feature will help safe guard a Local Area Network (LAN) from unwanted visitors.

To take the full advantage of the 802.1x in DI-824VUP+, all of the wireless devices on your network must be 802.1x compatible and must have the 802.11x feature enabled to communicate with the router. (Note: Windows 2000 users will find a few downloads to enable 802.1x clients on the Microsoft website.)

Encryption Key Selection for Encryption Key


* Dynamic Keying is a technique for changing the WEP Key used between the supplicant (wireless client) and the access point.

- 64 bits - This will generate a 10 digit Dynamic Key value for encryption.
- 128 bits - This will generate a 26 digit Dynamic Key value for encryption.
- 256bits - This will generate a 58 digit Dynamic Key value for encryption.
- Lifetime - Select the period of time before a new Dynamic Key is generated.

RADIUS Server Enter the IP address and port number of the RADIUS server that will be used as the 802.1x authenticator. Enter the secret key that has also been entered into the RADIUS server's configuration.

Using the Configuration Menu

Home > WAN

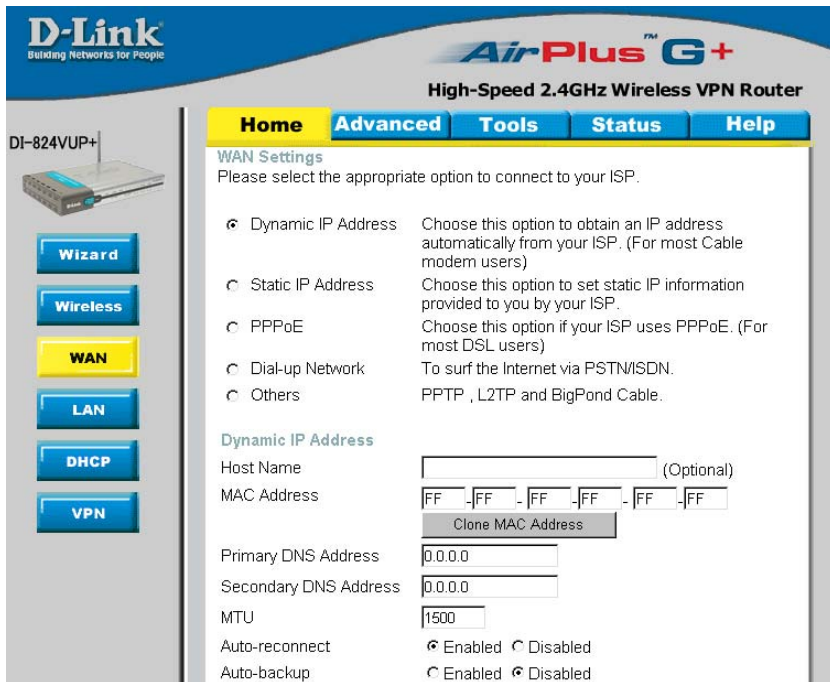

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Wizard
Wireless
WAN
LAN
DHCP
VPN

Home Advanced Tools Status Help

WAN Settings
Please select the appropriate option to connect to your ISP.

- Dynamic IP Address Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- Static IP Address Choose this option to set static IP information provided to you by your ISP.
- PPPoE Choose this option if your ISP uses PPPoE. (For most DSL users)
- Dial-up Network To surf the Internet via PSTN/ISDN.
- Others PPTP, L2TP and BigPond Cable.

Dynamic IP Address

Host Name (Optional)

MAC Address

Primary DNS Address 0.0.0.0

Secondary DNS Address 0.0.0.0

MTU 1500

Auto-reconnect Enabled Disabled

Auto-backup Enabled Disabled

Choose WAN Type

WAN stands for **Wide Area Network**. In this case WAN represents the mode in which your ISP connects to the Internet. If you are uncertain, please ask your ISP which of the following represents your connection mode to the Internet:

Dynamic IP Address

Obtain an IP address from your ISP automatically (mainly for Cable users).

Static IP Address

Your ISP assigns you a Static IP Address.

PPP over Ethernet

Some ISPs require the use of PPPoE to connect to their services (mainly for DSL users).

Dial-up Network

Dial-up users can select this option to connect to their ISP through an analog dial-up modem if broadband connectivity is unavailable.

Others

PPTP

For use in Europe only.

Big Pond Cable

For use in Australia only.

Using the Configuration Menu

Home > WAN > Dynamic IP Address

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. On the left, there is a navigation menu with buttons for Wizard, Wireless, WAN (highlighted in yellow), LAN, DHCP, and VPN. The main content area is titled 'WAN Settings' and contains the following options:

- Dynamic IP Address: Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- Static IP Address: Choose this option to set static IP information provided to you by your ISP.
- PPPoE: Choose this option if your ISP uses PPPoE. (For most DSL users)
- Dial-up Network: To surf the Internet via PSTN/ISDN.
- Others: PPTP, L2TP and BigPond Cable.

Below these options, there is a 'Dynamic IP Address' section with the following fields and controls:

- Host Name: [] (Optional)
- MAC Address: [FF][FF][FF][FF][FF][FF] with a 'Clone MAC Address' button below it.
- Primary DNS Address: [0.0.0.0]
- Secondary DNS Address: [0.0.0.0]
- MTU: [1500]
- Auto-reconnect: Enabled Disabled
- Auto-backup: Enabled Disabled

Most Cable modem users will select this option to obtain an IP Address automatically from their ISP (Internet Service Provider).

Host Name

This is optional, but may be required by some ISPs. The host name is the device name of the Router.

Renew IP Forever

Enable this feature to allow the router to automatically reconnect to the ISP if the connection drops.

MAC Address

The default MAC Address is set to the WAN's physical interface MAC address on the Router.

Clone MAC Address

This feature will copy the MAC address of the Ethernet card, and replace the WAN MAC address of the Router with this Ethernet card MAC address. It is not recommended that you change the default MAC address unless required by your ISP.

Using the Configuration Menu

Home > WAN > Static IP Address

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The 'WAN' menu is highlighted in yellow. Under 'WAN Settings', the 'Static IP Address' option is selected with a radio button. Below this, the 'Static IP Address' section contains several input fields: IP Address (0.0.0.0), Subnet Mask (255.255.255.0), ISP Gateway Address (0.0.0.0), Primary DNS Address (0.0.0.0), Secondary DNS Address (0.0.0.0), and MTU (1500). The 'Auto-backup' option is currently set to 'Disabled'.

If you use a Static IP Address, you will input information here that your ISP has provided to you.

WAN IP Address Input the IP Address provided by your ISP.

WAN Subnet Mask Input the Subnet Mask provided by your ISP.

WAN Gateway Input the Gateway address provided by your ISP.

Primary DNS Input the primary DNS address provided by your ISP.

Secondary DNS (Optional) Input the Secondary DNS address provided by your ISP.


MTU *Maximum Transmission Unit*; default is 1500; you may need to change the MTU to conform to your ISP.

Auto-backup Enabling this feature will connect your router to the Internet using a dial-up service if your broadband connection becomes unavailable. A subscription to a dial-up service is required for the auto-backup to work.

Using the Configuration Menu

Home > WAN > PPPoE

Most DSL users will select this option to obtain an IP address automatically from their ISP through the use of PPPoE.

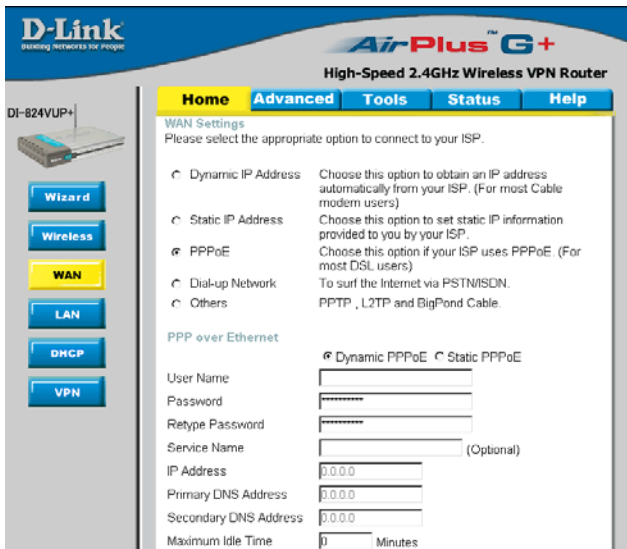

User Name

Your PPPoE username provided by your ISP.

Password

Your PPPoE password provided by your ISP.

Service Name

(Optional) Check with your ISP for more information if they require the use of service name.

IP Address

(Optional) Enter in the IP Address if you are assigned a static PPPoE address.

Primary DNS

You will get the DNS IP automatically from your ISP but you may enter a specific DNS address that you want to use instead.

Secondary DNS

(Optional) Input the secondary DNS address.

Maximum Idle Time

Enter a maximum idle time during which Internet connection is maintained during inactivity. To disable this feature, enable *Auto-reconnect*.

MTU

Maximum Transmission Unit; default is 1492; you may need to change the MTU to conform to your ISP.

Auto-reconnect

If enabled, the Broadband Router will automatically connect to your ISP after your system is restarted or if the connection is dropped.

Auto-backup

Enabling this feature will connect your router to the Internet using a dial-up service if your broadband connection becomes unavailable. A subscription to a dial-up service is required for the auto-backup to work.

Using the Configuration Menu

Home > WAN > Dial-up Network



Most Dial-up users will select this option to connect to their ISP through an analog dial-up modem. This feature can be used as a back-up when your broadband connectivity is unavailable.

Dial-up Telephone

Telephone number to connect to your ISP

Dial-up Account

Username provided by your ISP

Dial-up Password

Password provided by your ISP

Primary DNS/ Secondary DNS

If the settings are configured as "0.0.0.0," they will be automatically assigned upon connection.

Assigned IP Address

(Optional) Enter in the IP Address if you are assigned a static PPPoE address.

Extra Settings

This setting is used to optimize the communication quality between the ISP and your analog dial-up modem. (Initialization string) - optional.

Maximum Idle Time

Enter a maximum idle time during which Internet connection is maintained during inactivity. To disable this feature, enable *Auto-reconnect*.

Baud Rate

The communication speed between the DI-824VUP+ and your modem.

Auto-reconnect

If enabled, the Broadband Router will automatically connect to your ISP after your system is restarted or if the connection is dropped.

Using the Configuration Menu

Home > WAN > Others > PPTP

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The left sidebar contains navigation buttons for Wizard, Wireless, WAN (highlighted), LAN, DHCP, and VPN. The main content area is titled 'WAN Settings' and includes a navigation bar with Home, Advanced, Tools, Status, and Help. Under 'WAN Settings', there is a list of connection options: Dynamic IP Address, Static IP Address, PPPoE, Dial-up Network, and Others. The 'Others' option is selected, showing sub-options for PPTP (selected), L2TP, and BigPond Cable. Below this, there are input fields for PPTP My IP Address (0.0.0.0), My Subnet Mask (255.255.255.0), Server IP Address (0.0.0.0), PPTP Account, PPTP Password, and Retype Password.

Point-to-Point Tunneling Protocol (PPTP) is a WAN connection used in Europe.

My IP Address Enter the IP Address.

My Subnet Mask Enter the Subnet Mask.

Server IP Address Enter the Server IP Address.

PPTP Account Enter the PPTP account name.

PPTP Password Enter the PPTP password.

Connection ID (Optional) Enter the connection ID if required by your ISP.


Maximum Idle Time Enter a maximum idle time during which Internet connection is maintained during inactivity. To disable this feature, enable *Auto-reconnect*.

Auto-reconnect If enabled, the Broadband Router will automatically connect to your ISP after your system is restarted or if the connection is dropped.

Auto-backup Enabling this feature will connect your router to the Internet using a dial-up service if your broadband connection becomes unavailable. A subscription to a dial-up service is required for the auto-backup to work.

Using the Configuration Menu

Home > WAN > Others > L2TP

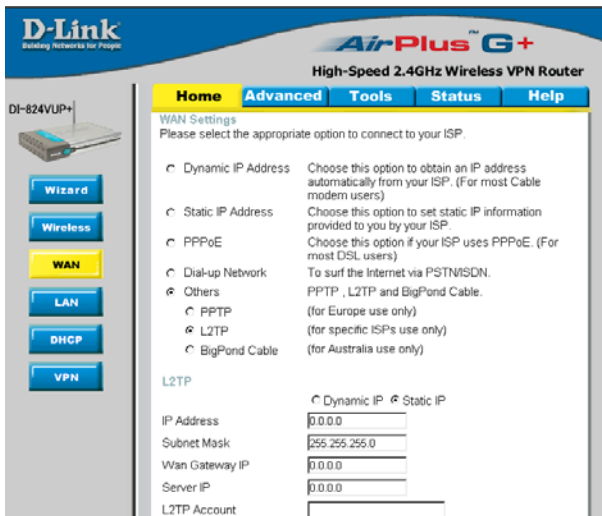

Layer 2 Tunneling Protocol(L2TP) is a WAN connection used in Israel.

IP Address

IP address provided by your ISP.

Subnet Mask

Subnet mask provided by your ISP.

Server IP

IP Address of LNS provided by your ISP.

L2TP Account

Your L2TP username provided by your ISP.

L2TP password

Your L2TP password provided by your ISP.

Retype Password

Re-enter L2TP password.

Maximum Idle Time


Set it to zero or enable Auto-reconnect to disable this feature. If Auto-reconnect is enabled, this product will automatically connect to the ISP after the router is restarted or connection is dropped.

Auto-Reconnect

If enabled, the Broadband Router will automatically connect to your ISP after your system is restarted or if the connection is dropped.

Using the Configuration Menu

Home > WAN > Others > BigPond Cable

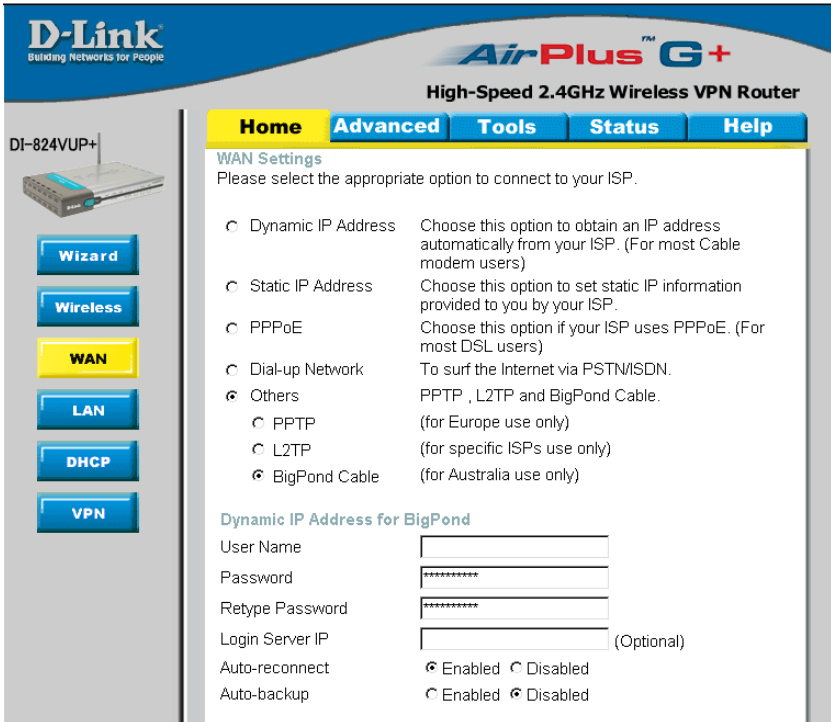

D-Link
Building Networks for People

AirPlus G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Wizard
Wireless
WAN
LAN
DHCP
VPN

Home Advanced Tools Status Help

WAN Settings
Please select the appropriate option to connect to your ISP.

- Dynamic IP Address Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- Static IP Address Choose this option to set static IP information provided to you by your ISP.
- PPPoE Choose this option if your ISP uses PPPoE. (For most DSL users)
- Dial-up Network To surf the Internet via PSTN/ISDN.
- Others PPTP, L2TP and BigPond Cable.
 - PPTP (for Europe use only)
 - L2TP (for specific ISPs use only)
 - BigPond Cable (for Australia use only)

Dynamic IP Address for BigPond

User Name

Password

Retype Password

Login Server IP (Optional)

Auto-reconnect Enabled Disabled

Auto-backup Enabled Disabled

Dynamic IP Address for BigPond is a WAN connection used in Australia.

User Name Enter in the user name for the BigPond account.

Password Enter the password for the BigPond account.


Login Server IP (Optional) Enter the Login Server IP if required.

Auto-reconnect If enabled, the Broadband Router will automatically connect to your ISP after your system is restarted or if the connection is dropped.

Auto-backup Enabling this feature will connect your router to the Internet using a dial-up service if your broadband connection becomes unavailable. A subscription to a dial-up service is required for the auto-backup to work.

Using the Configuration Menu

Home > LAN

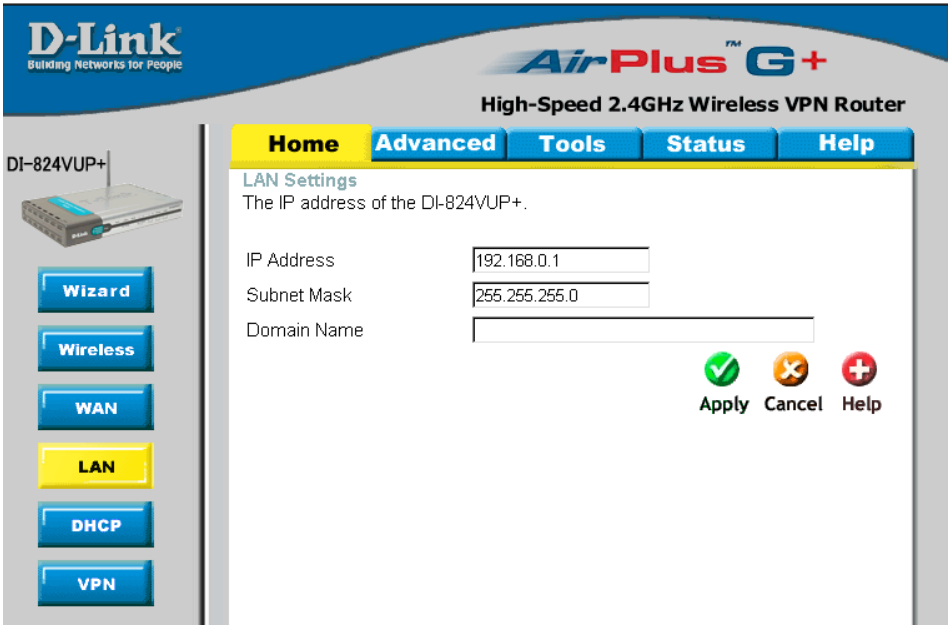

LAN is short for Local Area Network. This is considered your internal network. These are the IP settings of the LAN interface for the DI-824VUP+. These settings may be referred to as Private settings. You may change the LAN IP address if needed. The LAN IP address is private to your internal network and cannot be seen on the Internet.

IP Address

The IP address of the LAN interface.
The default IP address is: **192.168.0.1**.

Subnet Mask

The subnet mask of the LAN interface.
The default subnet mask is **255.255.255.0**.

Domain Name

(Optional) The name of your local domain.

Using the Configuration Menu

Home > DHCP

D-Link
Building Networks for People

AirPlus G+
High-Speed 2.4GHz Wireless VPN Router

Home | **Advanced** | **Tools** | **Status** | **Help**

DI-824VUP+

Wizard
Wireless
WAN
LAN
DHCP
VPN

DHCP Server
The DI-824VUP+ can be setup as a DHCP Server to distribute IP addresses to the LAN network.

DHCP Server Enabled Disabled
Starting IP Address 192.168.0.100
Ending IP Address 192.168.0.199
Lease Time 1 WEEK

Static DHCP
Static DHCP is used to allow DHCP server to assign same IP to specific MAC address.

Enabled Disabled
Name
IP Address 192.168.0.
MAC Address
DHCP Client -- select one --

Apply Cancel Help

DHCP stands for *Dynamic Host Control Protocol*. The DI-824VUP+ has a built-in DHCP server. The DHCP Server will automatically assign an IP address to the computers on the LAN/private network. Be sure to set your computers to be DHCP clients by setting their TCP/IP settings to “Obtain an IP Address Automatically.” When you turn your computers on, they will automatically load the proper TCP/IP settings provided by the DI-824VUP+. The DHCP Server will automatically allocate an unused IP address from the IP address pool to the requesting computer. You must specify the starting and ending address of the IP address pool.

DHCP Server Enable or disable the DHCP service.

Starting IP Address The starting IP address for the DHCP server’s IP assignment.

Ending IP Address The ending IP address for the DHCP server’s IP assignment.

Lease Time The length of time for the DHCP lease.

Static DHCP Used to allow the DHCP server to assign the same IP address to a specific MAC address. Enter the name, IP address, and MAC address into the fields. Select which DHCP client to clone.

DHCP Clients List Lists the DHCP clients connected to the DI-824VUP+. Click **Refresh** to update the list. The table will show the Host Name, IP Address, and MAC Address of the DHCP client computer.

Using the Configuration Menu

Home > VPN Settings

VPN Settings are settings that are used to create virtual private tunnels to remote VPN gateways. The tunnel technology supports data confidentiality, data origin, authentication, and data integrity of network information by utilizing encryption encapsulation protocols, encryption algorithms, and hashing algorithms.

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The page is titled "VPN Settings" and features a navigation menu with "Home", "Advanced", "Tools", "Status", and "Help". The "Advanced" tab is selected. On the left side, there is a sidebar with buttons for "Wizard", "Wireless", "WAN", "LAN", "DHCP", and "VPN" (which is highlighted in yellow). The main content area is titled "VPN Settings" and contains the following settings:

- VPN:** Enable
- NetBIOS broadcast:** Enable
- Max. number of tunnels:**

ID	Tunnel Name	Method
1	<input type="text"/>	IKE <input type="button" value="More"/>
2	<input type="text"/>	IKE <input type="button" value="More"/>
3	<input type="text"/>	IKE <input type="button" value="More"/>
4	<input type="text"/>	IKE <input type="button" value="More"/>
5	<input type="text"/>	IKE <input type="button" value="More"/>

At the bottom of the page, there are navigation buttons: "Previous page", "Next page", "Dynamic VPN Settings...", "L2TP Server Setting...", "PPTP Server Setting...", and "View VPN Status...". In the bottom right corner, there are three icons: a green checkmark (Apply), a yellow 'X' (Cancel), and a red plus sign (Help).

VPN

Click Enable to enable VPN tunnels. When you are not using the VPN feature, it is best to keep VPN disabled.

NetBIOS broadcast

Enable this to allow NetBIOS broadcast over the VPN tunnels.

Max. number of tunnels

Select the maximum number of allowable tunnels.

Tunnel Name

Create a name for the tunnel.

Method


IPSec VPN supports two kinds of key-obtained methods: manual key and automatic key exchange. Manual key approach indicates that the two endpoint VPN gateways require setting up authentication and encryption key by the Administrator manually. However, IKE approach will perform automatic Internet key exchange. Admins of both endpoint gateways will only need to set the same pre-shared key.

More

For more in depth configuration to adjust manual key or IKE method settings, click **More**.

Using the Configuration Menu

Home > VPN Settings > Tunnel > Method > IKE

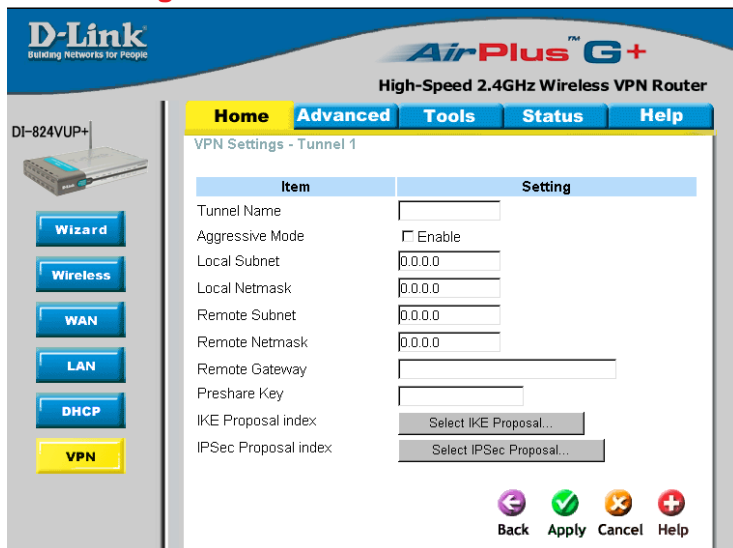

Tunnel Name

Current tunnel name.

Aggressive Mode

Enabling this mode will accelerate establishing tunnel, but the device will have less security.

Local Subnet

The subnet of the VPN gateway's local network. It can be a host, a partial subnet or a whole subnet.

Local Netmask

Local netmask combined with local subnet to form a subnet domain.

Remote Subnet

The subnet of the remote VPN gateway's local network. It can be a host, a partial subnet, or a whole subnet.

Remote Netmask

The subnet of the remote VPN gateway's local network. It can be a host, a partial subnet, or a whole subnet.

Remote Gateway

The WAN IP address of remote VPN gateway.

Preshared Key

The first key that supports IKE mechanism of both VPN gateways for negotiating further security keys. The pre-shared key must be the same for both endpoint gateways.

IKE Proposal index

Click the button to setup a set of frequent-used IKE proposals and select from the set of IKE proposals for the tunnel.

IPSec Proposal index

Click the button to setup a set of frequent-used IPSec proposals and select from the set of IKE proposals for the tunnel.

Using the Configuration Menu

Home > VPN Settings > Tunnel > Method > IKE > Select IKE Proposal

VPN Settings - Tunnel 1 - Set IKE Proposal

Item	Setting
IKE Proposal index	- Empty - <input type="button" value="Remove"/>

ID	Proposal Name	DH Group	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
2	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
3	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
4	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
5	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
6	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
7	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
8	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
9	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.
10	<input type="text"/>	Group 1	3DES	SHA1	0	Sec.

Proposals ID: -- select one --

IKE Proposal index A list of selected proposal indexes from the IKE proposal pool listed below.

Proposal Name This is the name used to classify the IKE proposal.


DH Group There are three groups that can be selected: group 1 (MODP768), group 2 (MODP1024), and group 5 (MODP1536).

Encrypt algorithm There are two algorithms that can be selected: 3DES and DES.

Auth algorithm There are two algorithms that can be selected: SHA1 and MD5.

Using the Configuration Menu

Home > VPN Settings > Tunnel > Method > IKE > Select IKE Proposal
Continued...

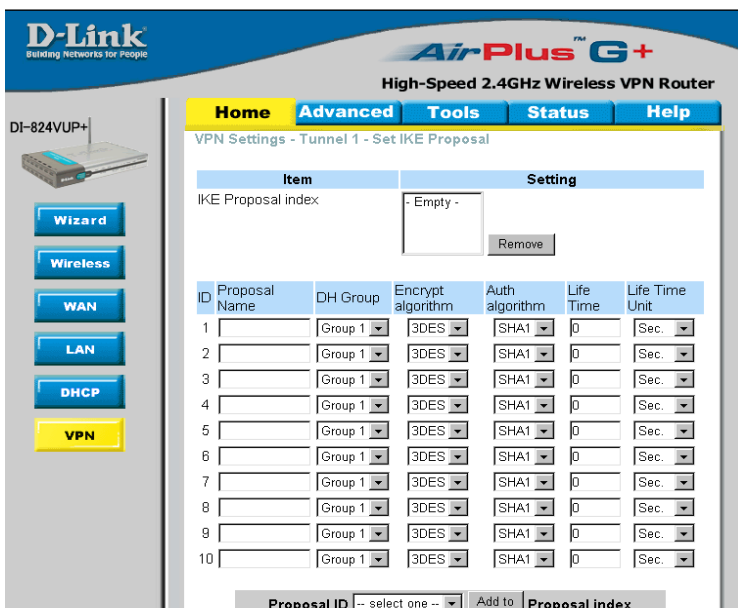

Life Time

Enter in the life time value.

Life Time Unit

There are two units that can be selected: second and KB.

Proposal ID

The identifier of IKE proposal can be chosen for adding the corresponding proposal to the dedicated tunnel.

Add to

Click it to add the chosen proposal indicated by proposal ID to IKE Proposal index.

Using the Configuration Menu

Home > VPN Settings > Tunnel > Method > IKE > Select IPSEC Proposal

DI-824VUP+

Wizard

Wireless

WAN

LAN

DHCP

VPN

Home **Advanced** **Tools** **Status** **Help**

VPN Settings - Tunnel 1 - Set IPSEC Proposal

Item	Setting
IPSec Proposal index	- Empty - <input type="button" value="Remove"/>

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1		None	ESP	3DES	None	0	Sec.
2		None	ESP	3DES	None	0	Sec.
3		None	ESP	3DES	None	0	Sec.
4		None	ESP	3DES	None	0	Sec.
5		None	ESP	3DES	None	0	Sec.
6		None	ESP	3DES	None	0	Sec.
7		None	ESP	3DES	None	0	Sec.
8		None	ESP	3DES	None	0	Sec.
9		None	ESP	3DES	None	0	Sec.
10		None	ESP	3DES	None	0	Sec.

IPSec Proposal index

A list of selected proposal indexes from the IPsec proposal pool listed below.

Proposal Name

This is the name used to classify the IPsec Proposal

DH Group

There are three groups that can be selected: group 1 (MODP768), group 2 (MODP1024), and group 5 (MODP1536).

Encap protocol

There are two protocols that can be selected: ESP and AH.

Encrypt algorithm


There are two algorithms that can be selected: 3DES and DES.

Auth algorithm

There are two algorithms that can be selected: SHA1 and MD5.

Using the Configuration Menu

Home > VPN Settings > Tunnel > Method > IKE > Select IPSEC Proposal
Continued...

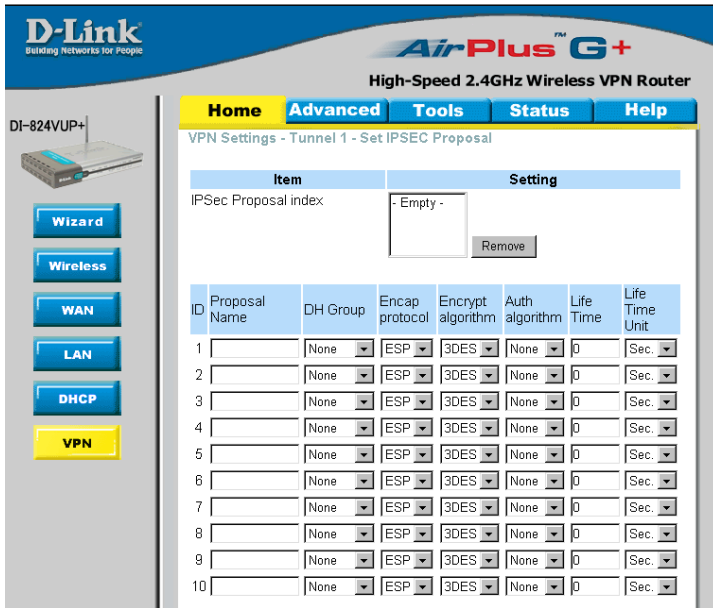

Life Time Enter in a life time value.

Life Time Unit There are two units that can be selected: second and KB.

Proposal ID The identifier of IPsec proposal can be chosen for adding the corresponding proposal to the dedicated tunnel.

Add to Click it to add the chosen proposal indicated by proposal ID to IPsec Proposal index list.

Using the Configuration Menu

Home > VPN Settings > Tunnel > Manual

Item	Setting
Tunnel Name	<input type="text"/>
Aggressive Mode	<input type="checkbox"/> Enable
Local Subnet	<input type="text" value="0.0.0.0"/>
Local Netmask	<input type="text" value="0.0.0.0"/>
Remote Subnet	<input type="text" value="0.0.0.0"/>
Remote Netmask	<input type="text" value="0.0.0.0"/>
Remote Gateway	<input type="text"/>
Method	MANUAL
Local SPI	<input type="text" value="0x0000"/>
Remote SPI	<input type="text" value="0x0000"/>
Encapsulation Protocol	ESP
Encryption Algorithm	3DES
Encryption Key (For ESP Only)	<input type="text"/>
	<input type="text"/> (for 3DES ONLY)
	<input type="text"/> (for 3DES ONLY)
Authentication Algorithm	NONE
Authentication Key	<input type="text"/>

- Tunnel Name** Current tunnel name.
- Aggressive Mode** Enabling this mode will accelerate establishing tunnel, but the device will have less security.
- Local Subnet** The subnet of the VPN gateway's local network. It can be a host, a partial subnet, or a whole subnet.
- Local Netmask** Local netmask combined with local subnet to form a subnet domain.
- Remote Subnet** The subnet of the remote VPN gateway's local network. It can be a host, a partial subnet, or a whole subnet.
- Remote Netmask** The subnet of the remote VPN gateway's local network. It can be a host, a partial subnet, or a whole subnet.
- Remote Gateway** The WAN IP address of remote VPN gateway.
- Method** The set of rules applied when connecting to the VPN gateway.
- Local SPI** The value of the local SPI should be set in hex format.
- Remote SPI** The value of the remote SPI should be set in hex format.

Using the Configuration Menu

Home > VPN Settings > Tunnel > Manual *Continued...*

Item	Setting
Tunnel Name	<input type="text"/>
Aggressive Mode	<input type="checkbox"/> Enable
Local Subnet	<input type="text" value="0.0.0.0"/>
Local Netmask	<input type="text" value="0.0.0.0"/>
Remote Subnet	<input type="text" value="0.0.0.0"/>
Remote Netmask	<input type="text" value="0.0.0.0"/>
Remote Gateway	<input type="text"/>
Method	MANUAL
Local SPI	<input type="text" value="0x0000"/>
Remote SPI	<input type="text" value="0x0000"/>
Encapsulation Protocol	ESP
Encryption Algorithm	3DES
Encryption Key (For ESP Only)	<input type="text"/>
	<input type="text"/> (for 3DES ONLY)
	<input type="text"/> (for 3DES ONLY)
Authentication Algorithm	NONE
Authentication Key	<input type="text"/>

Encapsulation Protocol

There are two protocols that can be selected: ESP and AH.

Encryption Algorithm

There are two algorithms that can be selected: 3DES and DES.

Encryption Key

For DES, the encryption key is 8 bytes (16 Char.). For 3DES, the encryption key is 24 bytes (48 Char.).

Authentication Algorithm

There are two algorithms that can be selected: SHA1 and MD5.

Authentication Key

For MD5, the authentication algorithm is 16 bytes (32 Char.). For SHA1, the authentication algorithm is 20 bytes (40 Char.).

Life Time

Enter in the life time value.

Life Time Unit

There are two units that can be selected: Second and KB.

Using the Configuration Menu

Home > VPN Settings > Dynamic VPN Tunnel

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The page title is "VPN Settings - Dynamic VPN Tunnel". On the left, there is a navigation menu with buttons for Wizard, Wireless, WAN, LAN, DHCP, and VPN (highlighted in yellow). The main content area contains a table with two columns: "Item" and "Setting".

Item	Setting
Tunnel Name	<input type="text"/>
Dynamic VPN	<input type="checkbox"/> Enable
Local Subnet	<input type="text" value="0.0.0.0"/>
Local Netmask	<input type="text" value="0.0.0.0"/>
Preshare Key	<input type="text"/>
IKE Proposal index	Select IKE Proposal...
IPSec Proposal index	Select IPSec Proposal...

At the bottom right of the configuration area, there are four icons: a left arrow (Back), a green checkmark (Apply), a red X (Cancel), and a red plus sign (Help).

VPN Settings - IKE

There are three parts that are necessary to setup the configuration of IKE for the dedicated tunnel: basic setup, IKE proposal setup, and IPSec proposal setup. Basic setup includes the setting of following items: local subnet, local netmask, remote subnet, remote netmask, remote gateway, and pre-shared key. The tunnel name is derived from the previous page of VPN setting. IKE proposal setup includes the setting of a set of frequent-used IKE proposals and selecting from the set of IKE proposals.

Tunnel Name

Current tunnel name.

Dynamic VPN

This feature works with a VPN software client so the DI-824VUP+ does not need to know the IP address of the remote clients.

Aggressive Mode

Enabling this mode will accelerate establishing the tunnel, but the device will have less security.

Local Subnet

The subnet of the VPN gateway's local network. It can be a host, a partial subnet, or a whole subnet.

Local Netmask

The netmask of the VPN gateway's local network.

Using the Configuration Menu

Home > VPN Settings > Dynamic VPN Tunnel *Continued...*

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The page title is "VPN Settings - Dynamic VPN Tunnel". On the left, there is a navigation menu with buttons for Wizard, Wireless, WAN, LAN, DHCP, and VPN (highlighted in yellow). The main content area contains a table with two columns: "Item" and "Setting".

Item	Setting
Tunnel Name	<input type="text"/>
Dynamic VPN	<input type="checkbox"/> Enable
Local Subnet	<input type="text" value="0.0.0.0"/>
Local Netmask	<input type="text" value="0.0.0.0"/>
Preshare Key	<input type="text"/>
IKE Proposal index	Select IKE Proposal...
IPSec Proposal index	Select IPSec Proposal...

At the bottom right of the configuration area, there are four buttons: Back (left arrow), Apply (checkmark), Cancel (X), and Help (plus sign).

Preshared Key

The first key that supports IKE mechanism of both VPN gateways for negotiating further security keys. The pre-shared key must be the same for both endpoint gateways.

IKE Proposal index


Click the button to setup a set of frequent-used IKE proposals and select from the set of IKE proposals for the dedicated tunnel.

IPSec Proposal index

Click the button to setup a set of frequent-used IPSec proposals and select from the set of IKE proposals for the dedicated tunnel.

Using the Configuration Menu

Home > VPN Settings > Dynamic VPN Tunnel > Set IKE Proposal

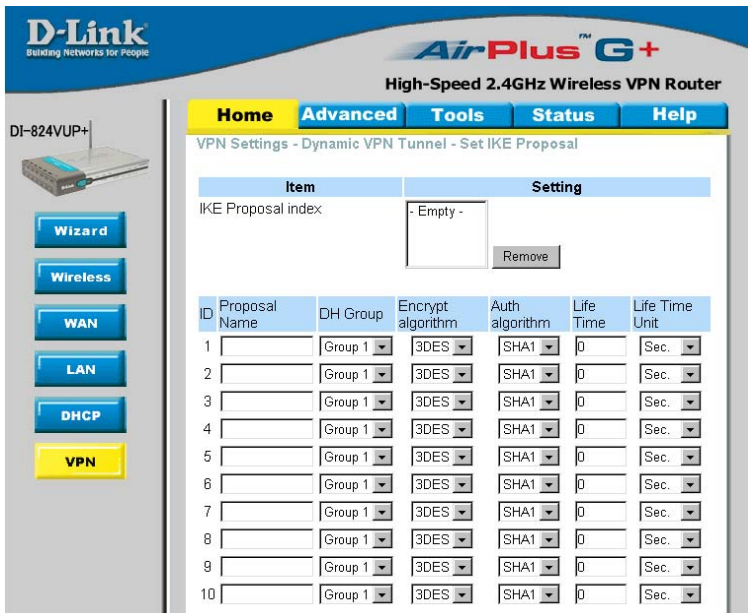

IKE Proposal index A list of selected proposal indexes from the IKE proposal pool listed below.

Proposal Name It indicates which IKE proposal to be focused.


DH Group There are three groups that can be selected: group 1 (MODP768), group 2 (MODP1024), and group 5 (MODP1536).

Encrypt algorithm There are two algorithms that can be selected: 3DES and DES.

Auth algorithm There are two algorithms that can be selected: SHA1 and MD5.

Using the Configuration Menu

Home > VPN Settings > Dynamic VPN Tunnel > Set IKE Proposal
Continued...

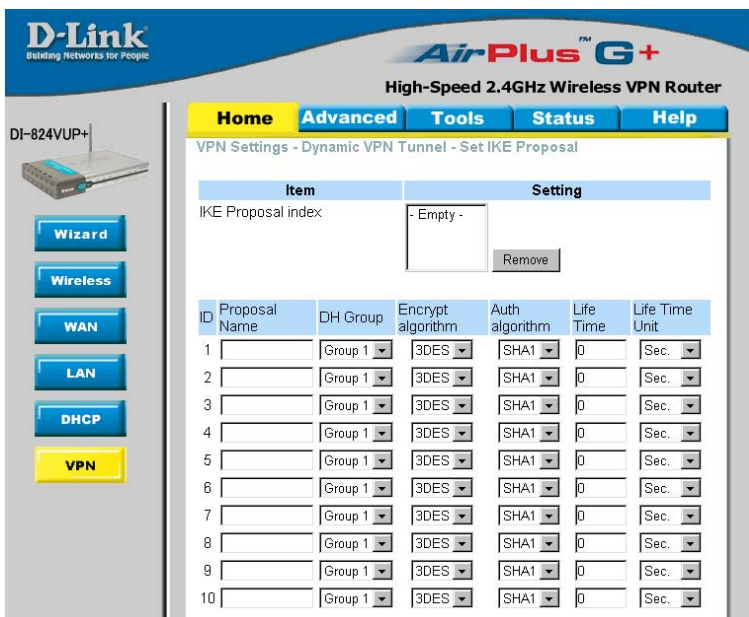

Life Time

Enter in the life time value.

Life Time Unit

There are two units that can be selected: second and KB.

Proposal ID

The identifier of IKE proposal can be chosen for adding the corresponding proposal to the dedicated tunnel.

Add to

Click it to add the chosen proposal indicated by proposal ID to IKE Proposal index list.

Using the Configuration Menu

Home > VPN Settings > Dynamic VPN Tunnel > Set IPSEC Proposal

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The page title is "VPN Settings - Dynamic VPN Tunnel - Set IPSEC Proposal". On the left, there is a navigation menu with buttons for Wizard, Wireless, WAN, LAN, DHCP, and VPN (highlighted in yellow). The main content area has tabs for Home, Advanced, Tools, Status, and Help. Below the tabs, there is a section for "IPSec Proposal index" with a dropdown menu showing "- Empty -" and a "Remove" button. Below that is a table with 10 rows, each representing a proposal. The table columns are: ID, Proposal Name, DH Group, Encap protocol, Encrypt algorithm, Auth algorithm, Life Time, and Life Time Unit.

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1		None	ESP	3DES	None	0	Sec.
2		None	ESP	3DES	None	0	Sec.
3		None	ESP	3DES	None	0	Sec.
4		None	ESP	3DES	None	0	Sec.
5		None	ESP	3DES	None	0	Sec.
6		None	ESP	3DES	None	0	Sec.
7		None	ESP	3DES	None	0	Sec.
8		None	ESP	3DES	None	0	Sec.
9		None	ESP	3DES	None	0	Sec.
10		None	ESP	3DES	None	0	Sec.

IPSec Proposal index

A list of selected proposal indexes from the IPSec proposal pool listed below.

Proposal Name

This is the name used to classify the IPSec proposal.

DH Group

There are three groups that can be selected: group 1 (MODP768), group 2 (MODP1024), and group 5 (MODP1536).

Encap protocol

There are two protocols that can be selected: ESP and AH.

Encrypt algorithm

There are two algorithms that can be selected: 3DES and DES.

Auth algorithm

There are two algorithms that can be selected: SHA1 and MD5.

Using the Configuration Menu

Home > VPN Settings > Dynamic VPN Tunnel > Set IPSEC Proposal
Continued...

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The page is titled "VPN Settings - Dynamic VPN Tunnel - Set IPSEC Proposal". On the left side, there is a sidebar with navigation buttons: "Wizard", "Wireless", "WAN", "LAN", "DHCP", and "VPN". The main content area has a navigation bar with "Home", "Advanced", "Tools", "Status", and "Help" tabs. Below the navigation bar, there is a table for IPsec proposals and a form for adding a new proposal.

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1		None	ESP	3DES	None	0	Sec.
2		None	ESP	3DES	None	0	Sec.
3		None	ESP	3DES	None	0	Sec.
4		None	ESP	3DES	None	0	Sec.
5		None	ESP	3DES	None	0	Sec.
6		None	ESP	3DES	None	0	Sec.
7		None	ESP	3DES	None	0	Sec.
8		None	ESP	3DES	None	0	Sec.
9		None	ESP	3DES	None	0	Sec.
10		None	ESP	3DES	None	0	Sec.

IPSec Proposal index:

Life Time

Enter in a life time value.

Life Time Unit

There are two units that can be selected: second and KB.

Proposal ID


The identifier of IPsec proposal can be chosen for adding the corresponding proposal to the dedicated tunnel.

Add to

Click it to add the chosen proposal indicated by proposal ID to IPsec Proposal index list.

Using the Configuration Menu

Home > VPN Settings > L2TP Server Setting

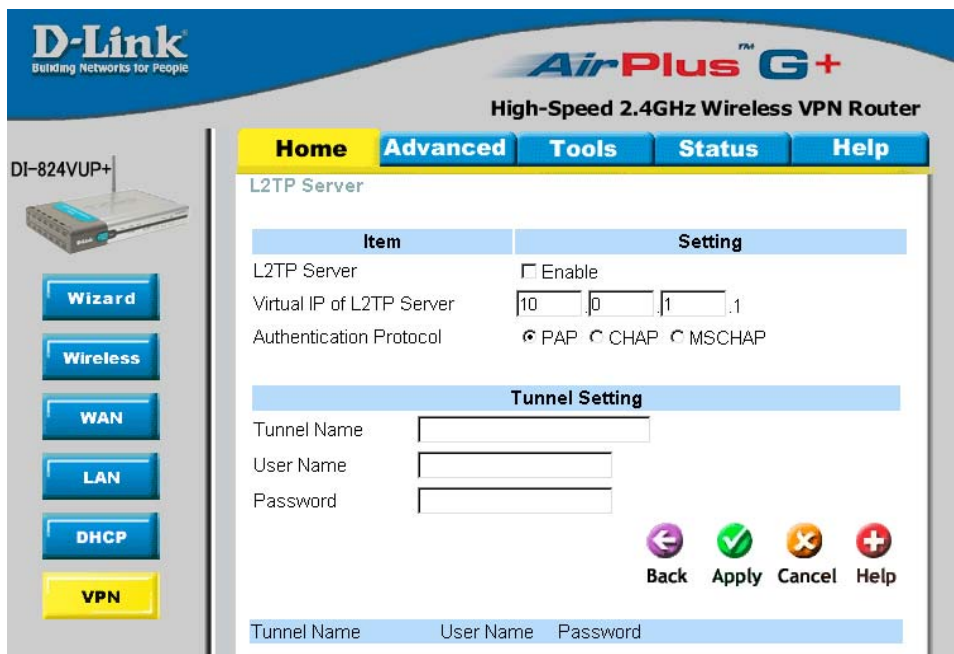

Enable L2TP Server

Click to enable the L2TP Server function.

Virtual IP of L2TP Server

Enter your Virtual IP address to access the L2PT server.

Authentication Protocol

Select one of the following authentication protocols: PAP, CHAP, or MSCHAP.

Tunnel Name

Current tunnel name.

User Name

Enter in the username for the L2TP account.

Password

Enter in the password for the L2TP account.

Using the Configuration Menu

Home > VPN Settings > PPTP Server Setting

The screenshot shows the configuration interface for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The page is titled "PPTP Server" and has a navigation menu with "Home", "Advanced", "Tools", "Status", and "Help". On the left, there is a sidebar with buttons for "Wizard", "Wireless", "WAN", "LAN", "DHCP", and "VPN". The main content area is divided into two sections: "PPTP Server" and "Tunnel Setting".

Item	Setting
PPTP Server	<input type="checkbox"/> Enable
Virtual IP of PPTP Server	10 . 0 . 0 . 1
Authentication Protocol	<input checked="" type="radio"/> PAP <input type="radio"/> CHAP <input type="radio"/> MSCHAP

Tunnel Setting

Tunnel Name

User Name

Password

Back Apply Cancel Help

Tunnel Name User Name Password

Enable PPTP Server

Click to enable the PPTP Server function.

Virtual IP of PPTP Server

Enter your Virtual IP address to access the PPTP server.

Authentication Protocol

Select one of the following authentication protocols: PAP, CHAP, or MSCHAP.

Tunnel Name

Current tunnel name.

User Name

Enter in the username for the PPTP account.

Password

Enter in the password for the PPTP account.

Using the Configuration Menu

Advanced > Virtual Server

Virtual Server

Virtual Server is used to allow Internet users access to LAN services.

Enabled Disabled

Name

Private IP 192.168.0.1

Protocol Type TCP

Private Port

Public Port

Schedule Always

From Time :00 :00 To :00 :00 day Sun to Sun

Virtual Server List			
Name	Private IP	Protocol	Schedule
<input type="checkbox"/> Virtual Server FTP	0.0.0.0	TCP 21 / 21	always
<input type="checkbox"/> Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always
<input type="checkbox"/> Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always
<input type="checkbox"/> Virtual Server DNS	0.0.0.0	UDP 53 / 53	always


The DI-824VUP+ can be configured as a virtual server so that remote users accessing Web or FTP services via the public IP address can be automatically redirected to local servers in the LAN (Local Area Network).

The DI-824VUP+ firewall feature filters out unrecognized packets to protect your LAN network so all computers networked with the DI-824VUP+ are invisible to the outside world. If you wish, you can make some of the LAN computers accessible from the Internet by enabling *Virtual Server*. Depending on the requested service, the DI-824VUP+ redirects the external service request to the appropriate server within the LAN network.

- Name** The name referencing the virtual service.
- Private IP** The server computer in the LAN network that will be providing the virtual services.
- Protocol Type** The protocol used for the virtual service.
- Private Port** The port number of the service used by the Private IP computer.
- Public Port** The port number on the WAN side that will be used to access the virtual service.
- Schedule** Select **Always**, or choose **From** and enter the time period during which the virtual service will be available.

Using the Configuration Menu

Advanced > Application

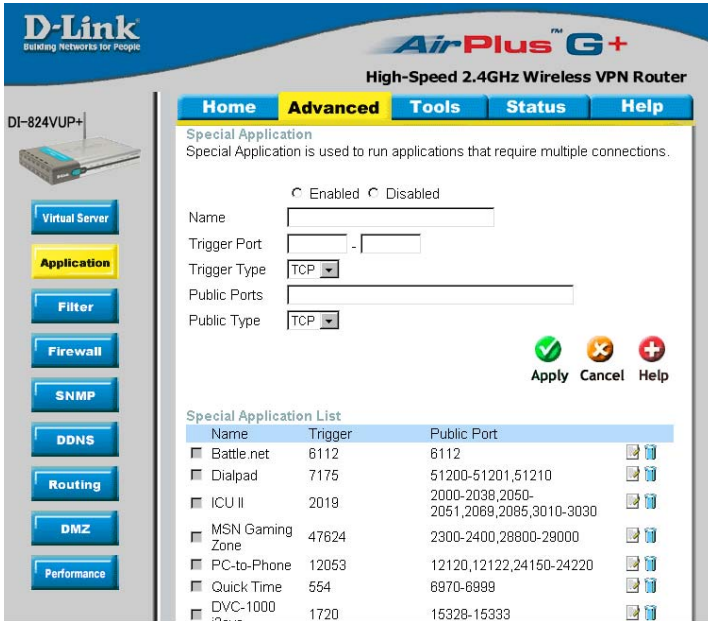

Some applications require multiple connections, such as Internet gaming, video conferencing, Internet telephony, and others. These applications have difficulties working through NAT (Network Address Translation). **Special Applications** makes some of these applications work with the DI-824VUP+. If you need to run applications that require multiple connections, specify the port normally associated with an application in the **Trigger** field, then enter the public ports associated with the trigger port into the **Incoming Ports** field.

At the bottom of the screen, there are already defined special applications. To use them, select one from the drop down list and select an ID number you want to use. Then click the "Copy to" button and the router will fill in the appropriate information to the list. You will then need to enable the service. If the mechanism of Special Applications fails to make an application work, try using DMZ host instead.

Note! Only one PC can use each Special Application tunnel.

Enabled

Select to activate the policy.

Trigger Port

This is the port used to trigger the application. It can be either a single port or a range of ports.

Public Ports

This is the port number on the WAN side that will be used to access the application. You may define a single port or a range of ports. You can use a comma to add multiple ports or port ranges.

Using the Configuration Menu

Advanced > Filter > IP Filter

Use IP (Internet Protocol) filters to allow or deny computers access to the Internet based on their IP address.



IP Filter

Use IP Filters to deny LAN IP addresses access to the internet.

Enabled or Disabled

Click **Enabled** to apply the filter policy or click **Disabled** to enter an inactive filter policy. (You can reactivate the policy later.)

IP Address

Enter in the IP address range of the computers that you want the policy to apply to. If it is only a single computer that you want the policy applied to, then enter the IP address of that computer in the Start Source IP and leave the End Source IP blank.

Port Range

Enter in the port range of the TCP/UDP ports that you want the policy to apply to. If it is only a single port that you want the policy applied to, then enter the port number in the Start Port field and leave the End Port field blank. If you want to use all the ports, you can leave the port range empty.

Protocol


Select the protocol type to allow or deny certain types of IP addresses.

Schedule

Select **Always**, or choose **From** and enter the time period during which the IP filter policy will be in effect.

Using the Configuration Menu

Advanced > Filter > MAC Filters

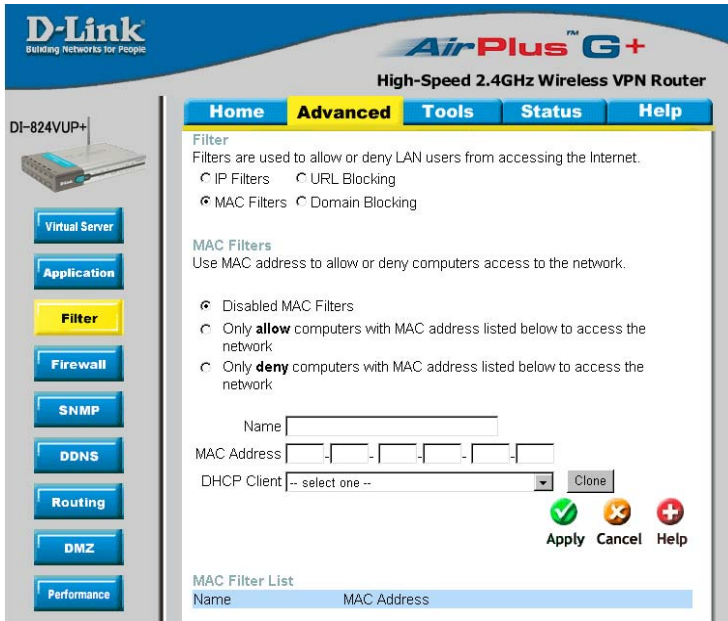

MAC (Media Access Control) Filters are used to allow or deny LAN (Local Area Network) computers from accessing the Internet and network by their MAC address.

At the bottom of the screen, there is a list of MAC addresses from the DHCP client computers connected to the DI-824VUP+. To use them, select one from the drop down list. Then click the “Apply” button and the DI-824VUP+ will fill in the appropriate information to the list.

Disabled MAC Filter

Select this option if you do not want to use MAC filters.

Only allow computers with MAC address listed below to access the network

Select this option to only allow computers that are in the list to access the network and Internet. All other computers will be denied access to the network and Internet.

Only deny computers with MAC address listed below to access the network


Select this option to only deny computers that are in the list to access the network and Internet. All other computers will be allowed access to the network and Internet.

MAC Address

Enter the **MAC Address** of the client that will be filtered.

Using the Configuration Menu

Advanced > Filter > URL Blocking

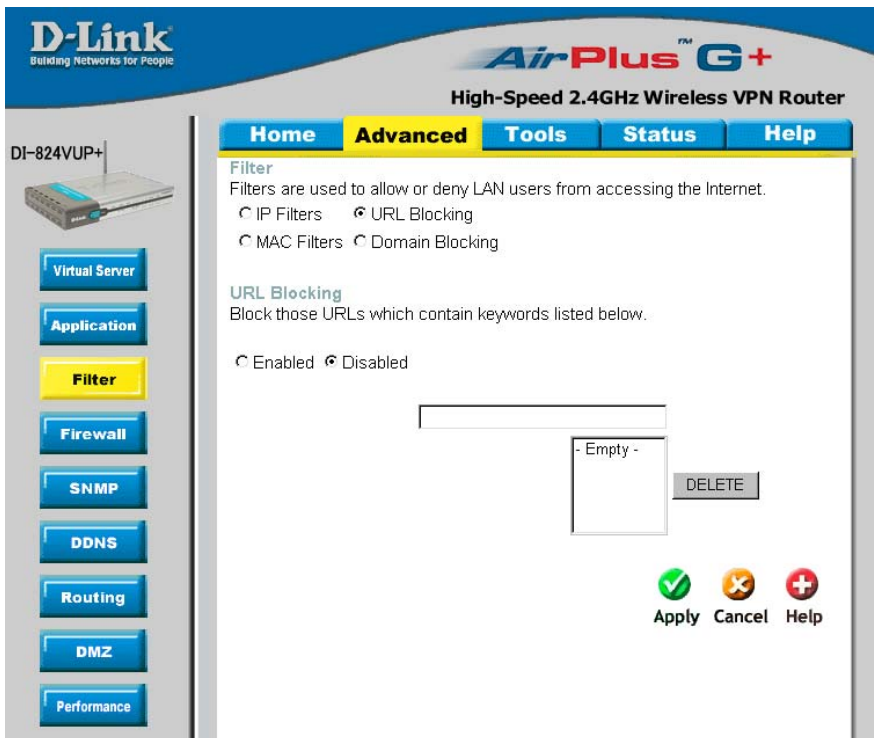


Use URL Blocking to deny LAN computers from accessing specific web sites by its URL. A URL is a specially formatted text string that defines a location on the Internet. If any part of the URL contains the blocked word, the site will not be accessible and the web page will not display.

Disabled URL Blocking

Select this option if you do not want to use URL Blocking.

Using the Configuration Menu

Advanced > Filter > Domain Blocking

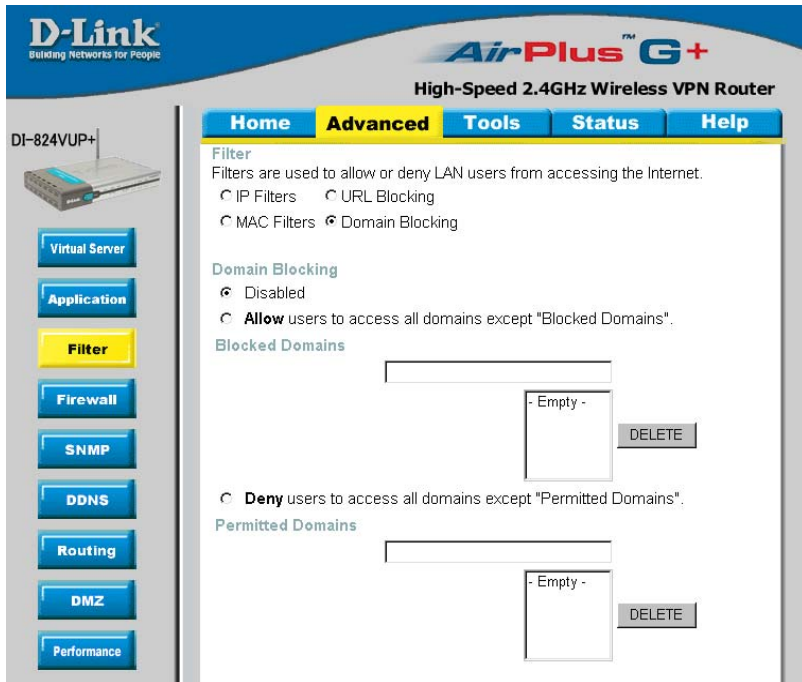

Use Domain Blocking to allow or deny computers access to specific Internet domains whether it is through www, ftp, snmp, etc.

Disabled Domain Blocking

Select this option if you do not want to use Domain Blocking.

Allow users to access all domains except "Blocked Domains"

Select this option to allow users to access the specified Internet domains listed below. Users will be denied access to all other Internet domains.

Deny users to access all domains except "Permitted Domains"

Select this option to deny users to access the specified Internet domains listed below. Users will be allowed access to all other Internet domains.

Using the Configuration Menu

Advanced > Firewall

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Virtual Server
Application
Filter
Firewall
SNMP
DDNS
Routing
DMZ
Performance

Home Advanced Tools Status Help

Firewall Rules
Firewall Rules can be used to allow or deny traffic from passing through the DI-824VUP+.

Enabled Disabled

Name

Action Allow Deny

Interface IP Start IP End Protocol Port Range

Source *

Destination * TCP

Schedule Always
 From Time : : To : :
day to

Apply Cancel Help

Firewall Rules List

ActionName	Source	Destination	Protocol		
<input type="checkbox"/> Allow	Allow to Ping WAN port	WAN,*	LAN,192.168.0.1	ICMP,*	<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> Deny	Default	*,*	LAN, 192.168.0.1	*,*	<input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/> Allow	Default	LAN,*	*, -192.168.0.1	*,*	<input type="checkbox"/> <input type="checkbox"/>

Firewall Rules is an advance feature used to allow or deny traffic from passing through the device. It works in the same way as IP Filters with additional settings. You can create more detailed rules for the device.

Enabled or Disabled

Click **Enabled** to apply the filter policy or click **Disabled** to enter an inactive filter policy (You can reactivate the policy later).

Name

Enter the name of the Firewall Rule.

Action

Select Allow or Deny to allow or deny traffic to pass through the DI-824VUP+.

Source

Choose between a LAN or WAN source. An asterisk signifies the selection of both sources.

IP Start

The starting IP address for the filter policy. Leaving the field blank selects all IPs.

IP End

The ending IP address for the filter policy. Leaving the field blank selects all IPs.

Destination

Choose between a LAN or WAN destination. An asterisk signifies the selection of both destinations.

Using the Configuration Menu

Advanced > Firewall *Continued*

The screenshot shows the D-Link configuration interface for a DI-824VUP+ router. The page is titled "Firewall Rules" and is part of the "Advanced" configuration menu. The interface includes a sidebar with navigation buttons for Virtual Server, Application, Filter, Firewall (highlighted), SNMP, DDNS, Routing, DMZ, and Performance. The main content area has tabs for Home, Advanced, Tools, Status, and Help. The Firewall Rules section includes a description, a status toggle (Enabled/Disabled), a Name field, an Action dropdown (Allow/Deny), and a table for defining rules with columns for Interface, IP Start, IP End, Protocol, and Port Range. A Schedule section offers "Always" or "From" time/day options. At the bottom, there is a "Firewall Rules List" table and "Apply", "Cancel", and "Help" buttons.

Action	Name	Source	Destination	Protocol
<input type="checkbox"/>	Allow	Allow to Ping WAN port	WAN,*	LAN,192.168.0.1 ICMP,*
<input type="checkbox"/>	Deny	Default	*,*	LAN, 192.168.0.1
<input type="checkbox"/>	Allow	Default	LAN,*	*,-192.168.0.1

IP Address

Enter in the IP address range of the computers that you want the policy to apply to. If it is only a single computer that you want the policy applied to, then enter the IP address of that computer in the Start Source IP and leave the End Source IP blank.

Protocol

Select one of the following protocols: TCP, UDP, or ICMP.

Port Range


Enter in the port range of the TCP/UDP ports that you want the policy to apply to. If it is only a single port that you want the policy applied to, then enter the port number in the Start Port field and leave the End Port field blank. If you want to use all the ports, you can leave the port range empty.

Schedule

Select **Always**, or choose **From** and enter the time period during which the virtual service will be available.

Using the Configuration Menu

Advanced > SNMP

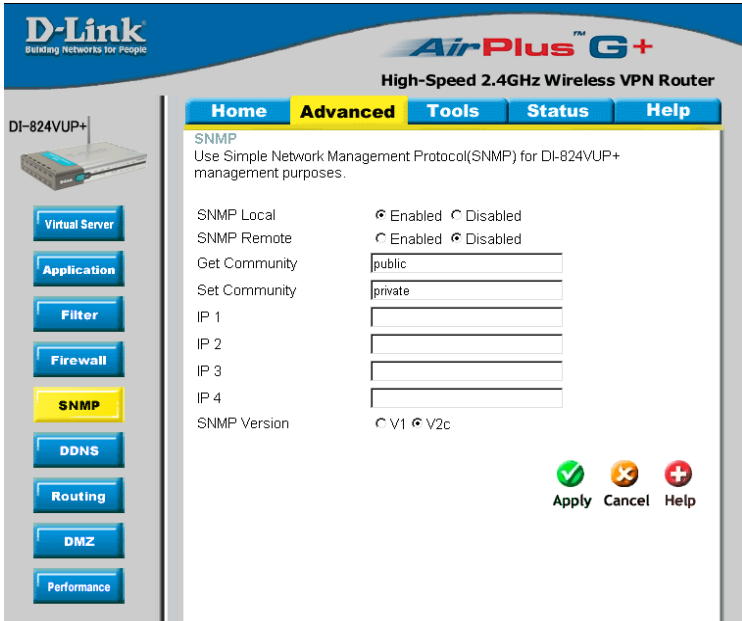

SNMP (Simple Network Management Protocol) is a widely used network monitoring and control protocol that reports activity on each network device to the administrator of the network. SNMP can be used to monitor traffic and statistics of the DI-824VUP+. The DI-824VUP+ supports SNMP v1 or v2c.

Enable SNMP (Simple Network Management Protocol.)

Local LAN (Local Area Network).

Remote WAN (Wide Area Network).

Get Community Enter the password **public** in this field to allow “Read only” access to network administration using SNMP. You can view the network, but no configuration is possible with this setting.


Set Community Enter the password **private** in this field to gain “Read and Write” access to the network using SNMP software. The administrator can configure the network with this setting.

SNMP v1 Simple Network Management Protocol (SNMP) is an application layer protocol that facilitates the exchange of management information between network devices.

SNMP v2 Enhanced version of SNMP v1 with additional protocol operations such as UDP, IP, CLNS, DDP, and IPX.

Using the Configuration Menu

Advanced > DDNS

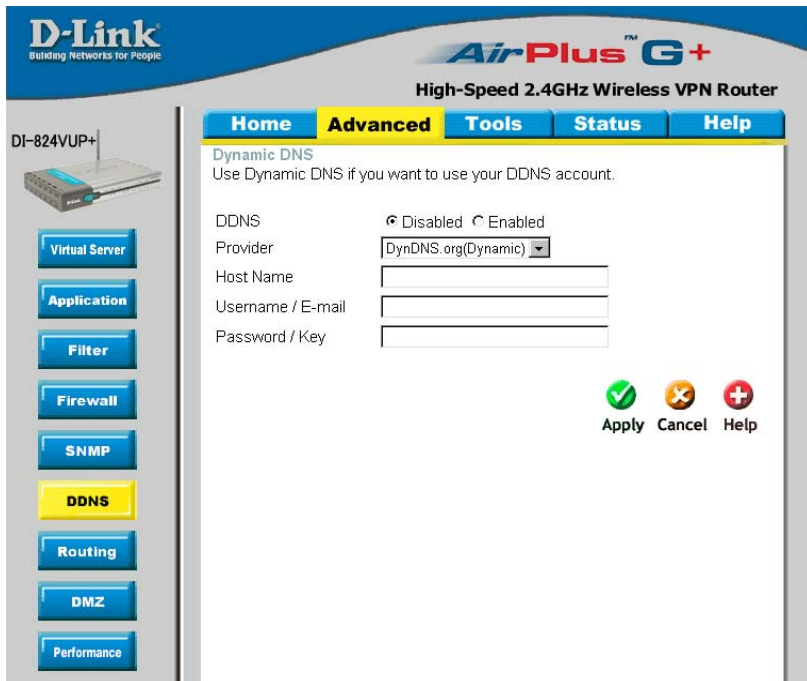

DDNS (Dynamic Domain Name System) keeps dynamic IP addresses (e.g., IP addresses assigned by a DHCP capable router or server) linked to a domain name. Users who have a Dynamic DNS account may use this feature on the DI-824VUP+.

DDNS

When an IP address is automatically assigned by a DHCP server, DDNS automatically updates the DNS server. Select **Disabled** or **Enabled**.

Provider

Select from the pull-down menu.

Host Name

Enter the Host name.

Username/Email

Enter the username or email address.

Password/Key

Enter the password or key.

Using the Configuration Menu

Advanced > Routing

Static routes can be added if you require specific routes within your internal network. These routes will not apply to the WAN (Internet) network.



Dynamic Routing

Dynamic Routing Settings allow the VPN Router to route IP packets to another network automatically. The RIP protocol is applied, and broadcasts the routing information to other routers on the network regularly.

By default, it is set to disable. Check to enable (RIPv1 / RIPv2) protocol.

RIP v1

Protocol in which the IP address is routed through the internet.

RIP v2

Enhanced version of RIP v1 with added features such as Authentication, Routing Domain, Next Hop Forwarding, and Subnet-mask Exchange.

Destination

Enter in the IP of the specified network that you want to access using the static route.

Subnet Mask

Enter in the subnet mask to be used for the specified network.

Gateway

Enter in the gateway IP address to the specified network.

Hop

Enter in the amount of hops it will take to the specified network.


Enable

Select this option for the specified static route to take effect.

Hop Count - In a transmission path, each link is terminated at a network device such as a router or gateway. The number of hops equals the number of routers or gateways that data must pass through before reaching the destination.

Using the Configuration Menu


Advanced > DMZ

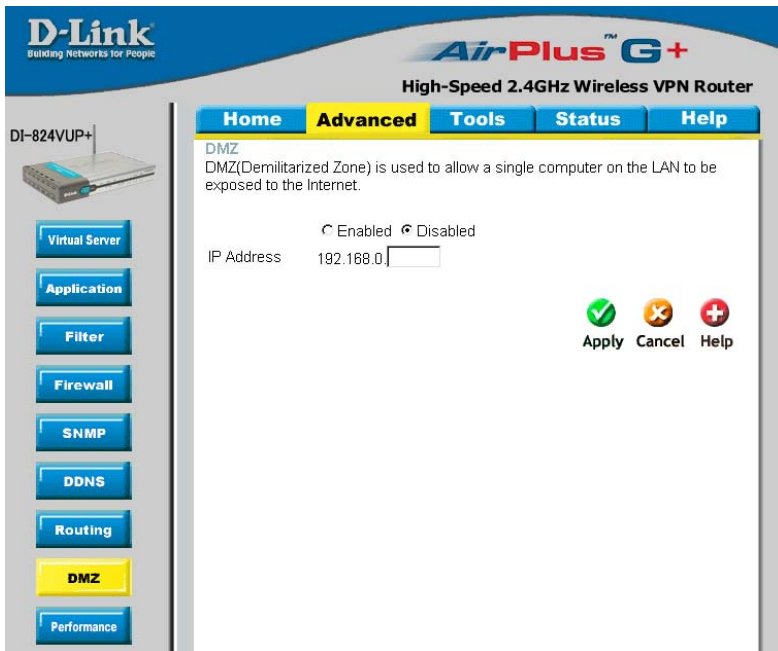

If you have a computer that cannot run Internet applications properly from behind the DI-824VUP+, then you can allow that computer to have unrestricted Internet access. Enter the IP address of that computer as a DMZ (Demilitarized Zone) host with unrestricted Internet access. Adding a client to the DMZ may expose that computer to a variety of security risks; so only use this option as a last resort.

Using the Configuration Menu

Advanced > Performance

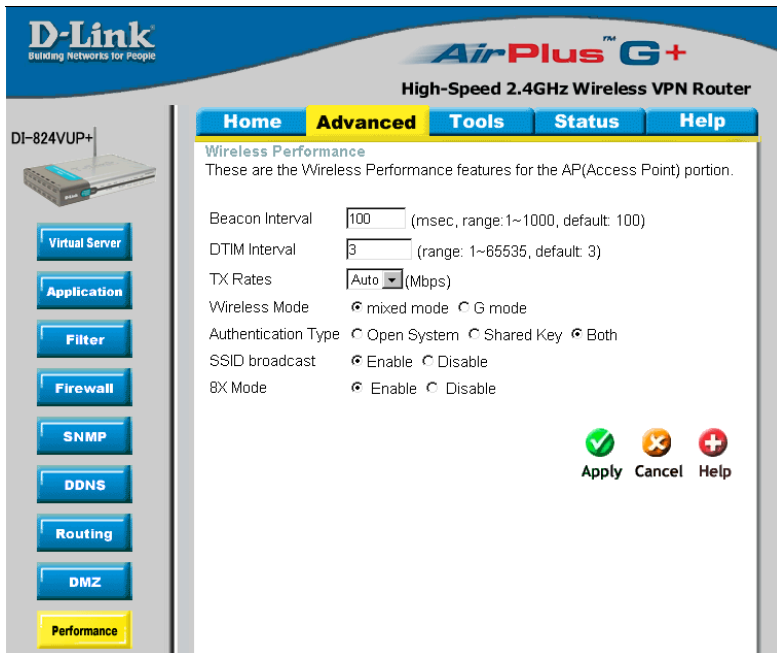

Beacon Interval Beacons are packets sent by an Access Point to synchronize a wireless network. Specify a value. **100** is the default setting and is recommended.

DTIM interval (Delivery Traffic Indication Message) **3** is the default setting. A DTIM is a countdown informing clients of the next window for listening to broadcast and multicast messages.

TX Rates Select the data rate. Default is **1-2-5.5-11-22-54Mbps**.

Wireless Mode Select either mix mode or G mode.

Mixed Mode The DI-824VUP+ will use either B or G mode depending on which mode has a stronger frequency.

G Mode The DI-824VUP+ will only use G mode.

Using the Configuration Menu

Advanced > Performance (Continued)

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Virtual Server
Application
Filter
Firewall
SNMP
DDNS
Routing
DMZ
Performance

Home **Advanced** Tools Status Help

Wireless Performance
These are the Wireless Performance features for the AP(Access Point) portion.

Beacon Interval (msec, range:1~1000, default: 100)
DTIM Interval (range: 1~65535, default: 3)
TX Rates (Mbps)
Wireless Mode mixed mode G mode
Authentication Type Open System Shared Key Both
SSID broadcast Enable Disable
8X Mode Enable Disable

Apply Cancel Help

Authentication Select **Open system**, **Shared Key** or **Both**.

Open System The DI-824VUP+ will be visible to all devices on the network. This is the default setting.

Shared Key In this mode, in order to access the DI-824VUP+ on the network, the device must be listed in the MAC Address Control List.

Both In this mode, all devices on the network can access the DI-824VUP+.

SSID Broadcast **Enable** is the default setting. Choose **Enable** to broadcast the SSID across the network. All devices on a network must share the same SSID (Service Set Identifier) to establish communication. Choose **Disable** if you do not wish to broadcast the SSID over the network.

8x Enable 8X Mode on the wireless client and the DI-824VUP+ to increase data transmission speed. 8X Mode will only work with wireless devices that also support 8X Mode.

Using the Configuration Menu

Tools > Admin

The screenshot shows the configuration interface for a D-Link DI-824VUP+ router. The page title is "AirPlus™ G+ High-Speed 2.4GHz Wireless VPN Router". The navigation tabs are "Home", "Advanced", "Tools" (selected), "Status", and "Help". On the left sidebar, there are buttons for "Admin" (highlighted), "Time", "System", "Firmware", and "Misc". The main content area is titled "Administrator Settings" and contains the following sections:

- Administrator Settings**: Administrators can change their login password.
 - Administrator (The Login Name is "admin")**:
 - New Password: [*****]
 - Reconfirm Password: [*****]
 - User (The Login name is "user")**:
 - New Password: [*****]
 - Reconfirm Password: [*****]
- Remote Management**: Let administrator perform administration task from remote host.
 - Enabled: Disabled:
 - IP Address: [0.0.0.0]
 - Port: [8080]

At the bottom right, there are three buttons: "Apply" (green checkmark), "Cancel" (orange X), and "Help" (red plus).

You can change the administrator and user passwords here. It is recommended that you change the administrator password from the default setting. The default password is blank (nothing).

Password To change the administrator or user password, enter in the old password and enter the new password twice to confirm.


Remote Management Remote Management allows the device to be configured through the WAN (Wide Area Network) port from the Internet using a web browser. A username and password is still required to access the browser-based management interface.

IP Address Internet IP Address of the computer that has access to the DI-824VUP+. If the IP Address is set to 0.0.0.0, this allows all Internet IP addresses to access the DI-824VUP+.

Port The port number used to access the DI-824VUP+. Example: `http://x.x.x.x:8080`, where x.x.x.x is the WAN IP address of the DI-824VUP++ and 8080 is the port used for the Web Management interface.

Using the Configuration Menu

Tools > Time

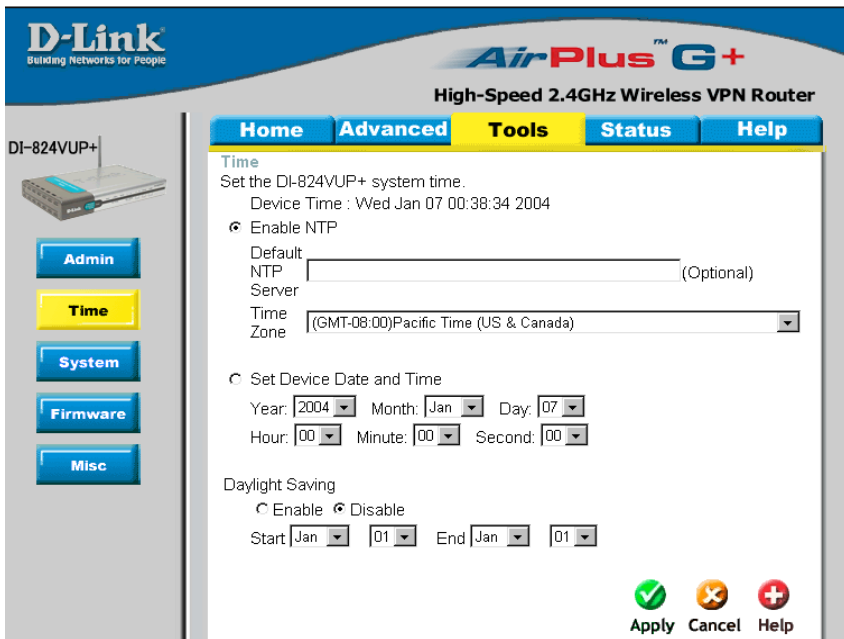

You will need to set the time zone corresponding to your location. The time can be set manually or the device can connect to a NTP (Network Time Protocol) server to retrieve the time.

Enable NTP

(Network Time Protocol). Select to synchronize the time on the DI-824VUP+ to an NTP server.


Set Device Date and Time

You can manually set the time on your network here.

NTP is short for **Network Time Protocol**, an Internet standard protocol that assures accurate synchronization to the millisecond of computer clock times in a network of computers.

Using the Configuration Menu

Tools > System

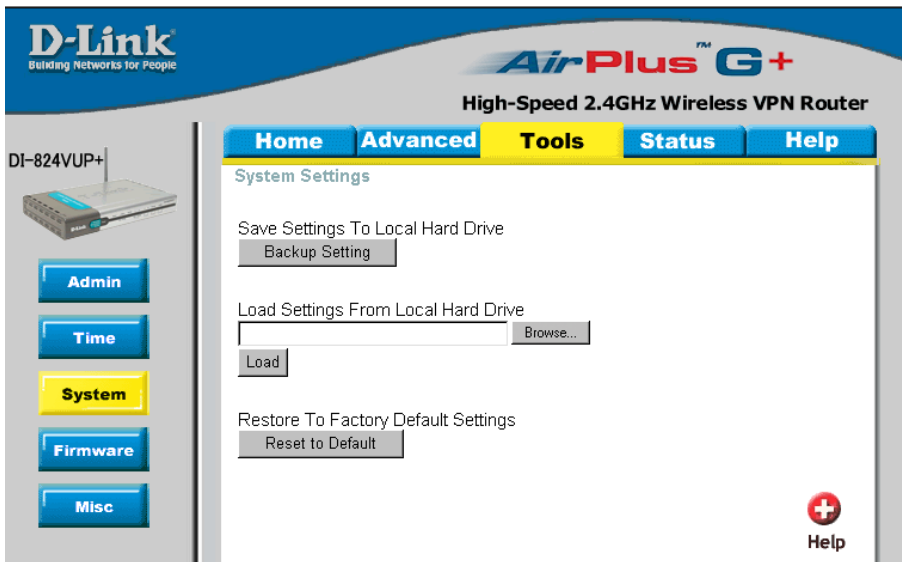

The current system settings can be saved as a file onto the local hard drive. The saved file or any other saved setting file created by the DI-824VUP+ can be uploaded into the unit. To reload a system settings file, click on “Browse” to search the local hard drive for the file to be used. The device can also be reset back to factory default settings by clicking on “Reset to Default” button. Use the restore feature only if necessary. This will erase previously saved settings for the unit. Make sure to save your system settings before doing a factory restore.

Save Settings to Local Hard Drive

Click **Save** to save the current settings to the local Hard Drive.

Load Settings from Local Hard Drive


Click **Browse** to find the settings file, then click **Load**.

Restore to Factory Default Settings

Click **Restore** to restore the factory default settings.

Using the Configuration Menu

Tools > Firmware

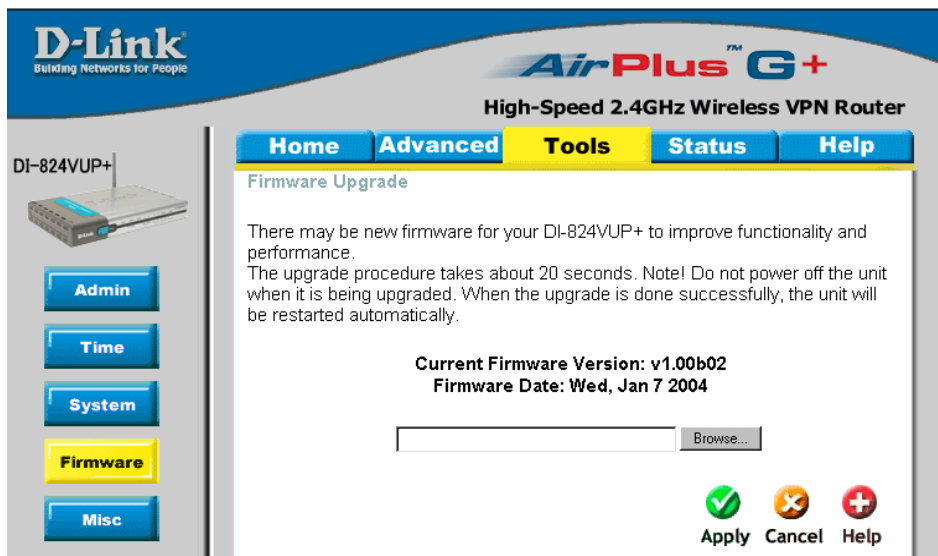

You can upgrade the firmware of the device using this tool. Make sure that the firmware you want to use is saved on the local hard drive of the computer. Click on “Browse” to search the local hard drive for the firmware to be used for the update. Upgrading the firmware will not change any of your system settings but it is recommended that you save your system settings before doing a firmware upgrade. Please check the D-Link support site for firmware updates at <http://support.dlink.com>.

Browse


After you have downloaded the new firmware, click **Browse** in this window to locate the firmware update on your hard drive. Click **Apply** to complete the firmware upgrade.



Note! Do not power off the unit when it is being upgraded. When the upgrade is complete, the unit will be restarted automatically.

Using the Configuration Menu

Tools > Misc

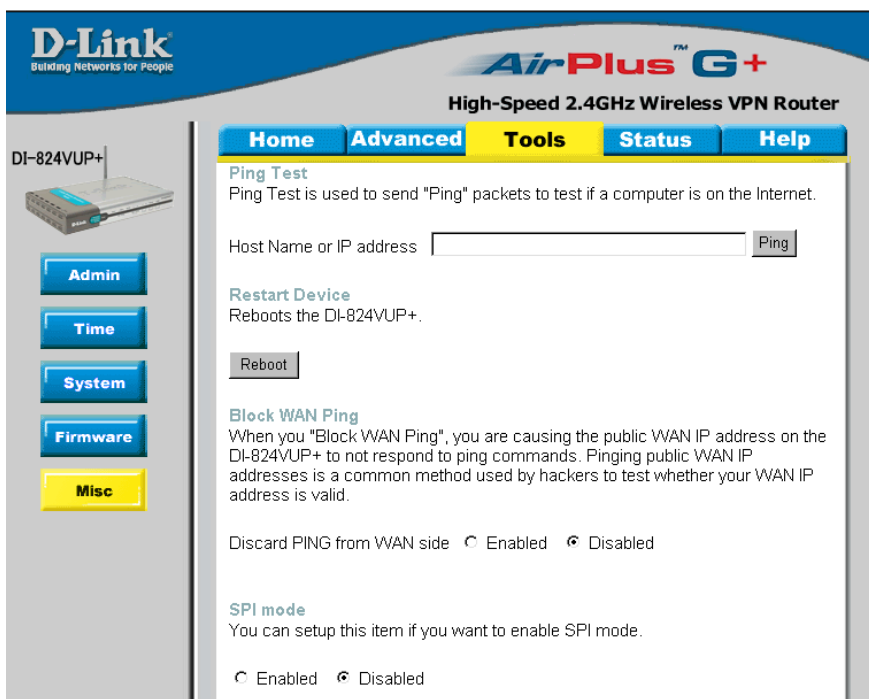

Ping Test

In the open box, enter in a URL (i.e., www.dlink.com) or an IP address and click on Ping to test your internet connection.

Restart Device

Click Reboot to restart the unit.

Block WAN Ping

Click **Enable** to block the WAN ping. Computers on the Internet will not get a reply back from the DI-824VUP+ when it is being “ping”ed. This may help to increase security.

SPI Mode

When this feature is enabled, the router will record the packet information passed through the router such as IP address, port address, ACK, SEQ number, and so on. The router will also check every incoming packet to detect if it is valid.

DoS

When DoS is enabled, the router will prevent Denial of Service attacks on all computers connected to the DI-824VUP+.

Using the Configuration Menu

Tools > Misc (Continued)

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Admin
Time
System
Firmware
Misc

Home **Advanced** **Tools** **Status** **Help**

Ping Test
Ping Test is used to send "Ping" packets to test if a computer is on the Internet.

Host Name or IP address

Restart Device
Reboots the DI-824VUP+.

Block WAN Ping
When you "Block WAN Ping", you are causing the public WAN IP address on the DI-824VUP+ to not respond to ping commands. Pinging public WAN IP addresses is a common method used by hackers to test whether your WAN IP address is valid.

Discard PING from WAN side Enabled Disabled

SPI mode
You can setup this item if you want to enable SPI mode.

Enabled Disabled

UPnP

UPnP is short for **Universal Plug and Play** which is a networking architecture that provides compatibility among networking equipment, software, and peripherals. The DI-824VUP+ is a UPnP enabled router and will only work with other UPnP devices/software. If you do not want to use the UPnP Functionality, it can be disabled by selecting "Disabled".

VPN Pass-Through

The device supports VPN (Virtual Private Network) pass-through for both PPTP (Point-to-Point Tunneling Protocol) and IPsec (IP Security). Once VPN pass-through is enabled, there is no need to open up virtual services. Multiple VPN connections can be made through the device. This is useful when you have many VPN clients on the LAN.

Non-standard FTP port

If an FTP server you want to access is not using the standard port 21, then enter in the port number that the FTP server is using instead.

Using the Configuration Menu

Status > Device Info

The screenshot shows the web interface for a D-Link DI-824VUP+ router. The page title is "AirPlus™ G+ High-Speed 2.4GHz Wireless VPN Router". The navigation menu includes Home, Advanced, Tools, Status (selected), and Help. On the left sidebar, there are buttons for Device Info (highlighted in yellow), Log, Stats, Wireless, and VPN Status. The main content area displays "Device Information" with the following details:

- Firmware Version:** v1.00b02, Wed, Jan 7 2004
- LAN**
 - MAC Address:** 00-50-18-00-0F-01
 - IP Address:** 192.168.0.1
 - Subnet Mask:** 255.255.255.0
 - DHCP Server:** Enabled
- WAN**
 - MAC Address:** 00-50-18-00-00-01
 - Connection:** DHCP Connecting... (with buttons for DHCP Renew and DHCP Release)
 - Remaining Lease Time:** 00:00:00
 - IP Address:** 0.0.0.0
 - Subnet Mask:** 0.0.0.0
 - Gateway:** 0.0.0.0
 - Domain Name Server:** 0.0.0.0
- Wireless**
 - MAC Address:** 00-50-18-00-0F-01
 - ESSID:** default
 - Security:** None


This screen displays information about the DI-824VUP+ such as WAN, LAN, and Wireless status.

DHCP Renew Use this button to reconnect to your ISP, if your WAN connection is set up for DHCP.

DHCP Release Use this button to disconnect from your ISP, if your WAN connection is set up for DHCP.

Using the Configuration Menu

Status > Log

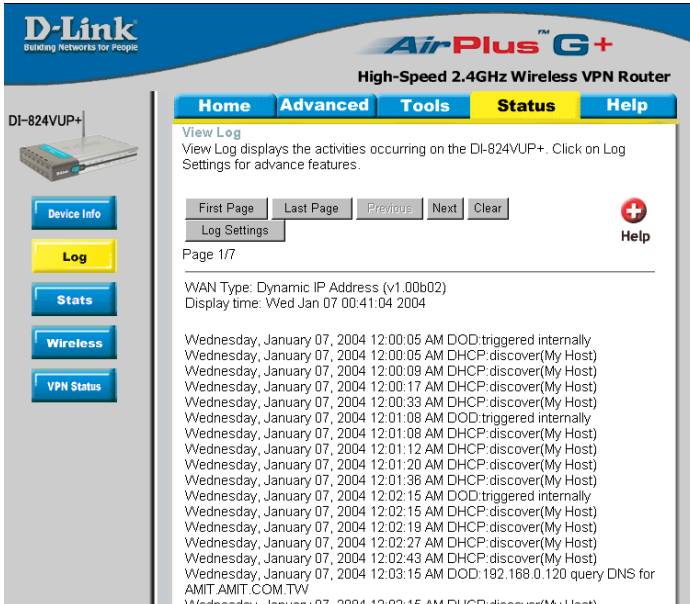

This screen displays activities occurring on the DI-824VUP+.

First Page Click **First Page** to go to the first page of the log.

Last Page Click **Last Page** to go to the last page of the log.

Previous Click **Previous** to go to the previous page of the log.


Next Click **Next** to go to the next page of the log.

Clear Click **Clear** to clear the current page of the log.

Log Settings Click for advanced features (see next page).

Using the Configuration Menu

Status > Log > Log Settings

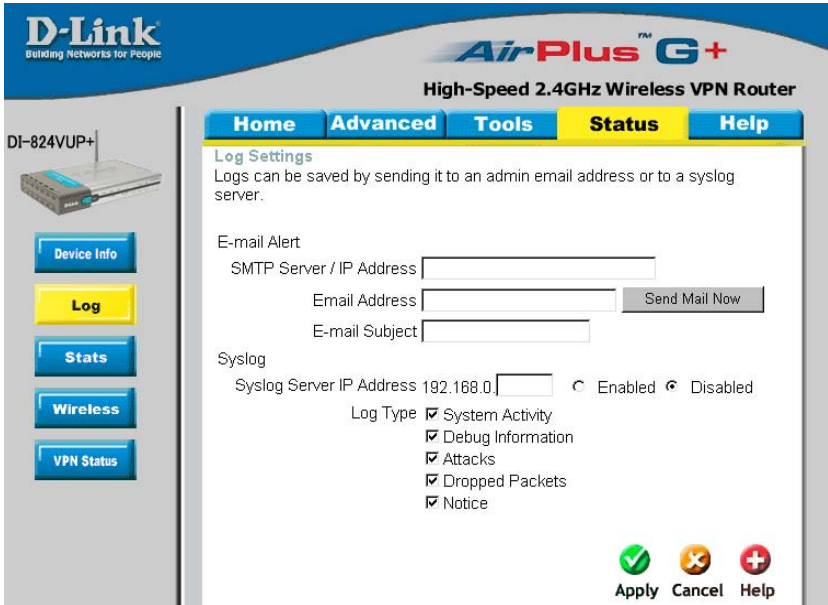

E-Mail Alert

The DI-824VUP+ can be set up to send the log files to a specific email address.

SMTP Server IP

Enter in the IP address of the mail server.

Email Address

Enter in the email address of the recipient who will receive the email log.

Send Mail Now

Click to send mail immediately.

IP Address of the Syslog Server

Enter in the IP address of a syslog server within the network. Click **Enable** to activate the policy. The DI-824VUP+ will send all of it's logs to the specified syslog server.

Log Type

Select the types of activity to log. By default, all values are selected.

Using the Configuration Menu

Status > Stats

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Device Info
Log
Stats
Wireless
VPN Status

Home Advanced Tools **Status** Help

Traffic Statistics
Traffic Statistics display Receive and Transmit packets passing through the DI-824VUP+.

Refresh Reset

Help

	Receive	Transmit
WAN	0 Packets	108 Packets
LAN	1763 Packets	1580 Packets
Wireless	0 Packets	176 Packets

In the Stats section, traffic statistics are displayed.

Refresh

This will update the page.

Reset

This will reset the packet counter to zero.

WAN

Displays Received / Transmitted packets from the WAN port.

LAN

Displays Received / Transmitted packets from the LAN port.

Using the Configuration Menu


Status > Wireless

The screenshot shows the configuration interface for a D-Link DI-824VUP+ router. The page title is "AirPlus™ G+ High-Speed 2.4GHz Wireless VPN Router". The navigation menu includes "Home", "Advanced", "Tools", "Status" (highlighted), and "Help". The "Status" section is titled "Connected Wireless Client List" and includes a description: "The Wireless Client table below displays Wireless clients Connected to the AP (Access Point)." Below this is a "Refresh" button and a "Help" icon (a red circle with a white plus sign). A table header is visible with two columns: "Connected Time" and "MAC Address". On the left side, there is a product image of the DI-824VUP+ router and a vertical menu with buttons for "Device Info", "Log", "Stats", "Wireless" (highlighted), and "VPN Status".

This screen displays the connection time and the MAC Address of the connected wireless clients. Click on **Refresh** for the most recent information.

Using the Configuration Menu

Status > Wireless

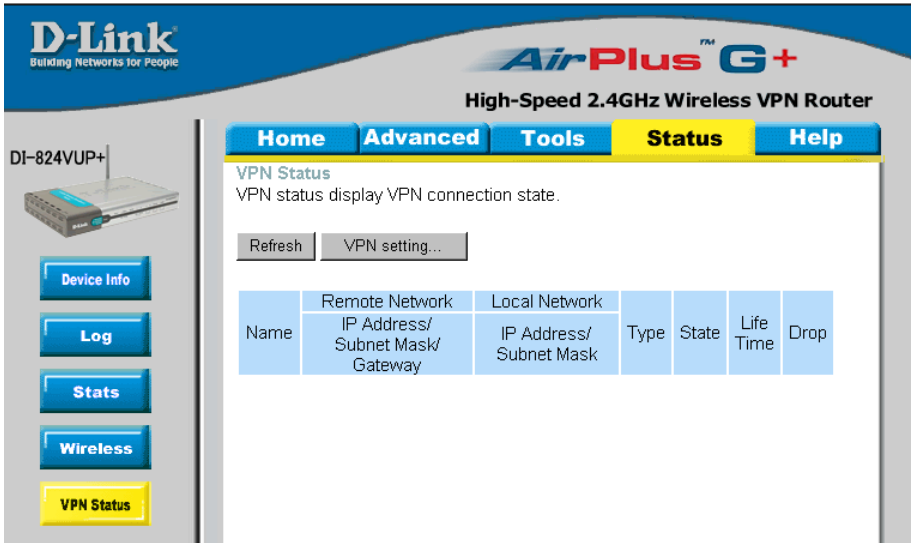

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Device Info
Log
Stats
Wireless
VPN Status

Home Advanced Tools **Status** Help

VPN Status
VPN status display VPN connection state.


Refresh VPN setting...

Name	Remote Network IP Address/ Subnet Mask/ Gateway	Local Network IP Address/ Subnet Mask	Type	State	Life Time	Drop
------	--	---	------	-------	--------------	------

This screen displays the VPN connection state.
Click on Refresh for the most recent information.

Using the Configuration Menu

Help

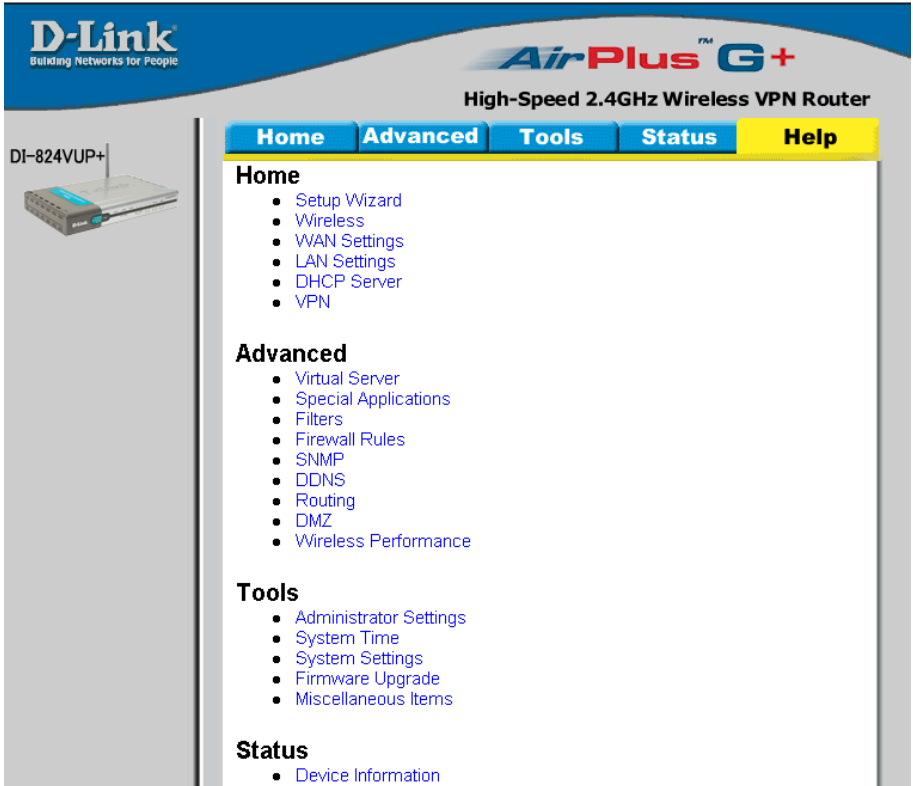

The screenshot displays the web-based configuration interface for a D-Link DI-824VUP+ router. The interface features a blue header with the D-Link logo and the product name "AirPlus™ G+ High-Speed 2.4GHz Wireless VPN Router". Below the header, there are five navigation tabs: "Home", "Advanced", "Tools", "Status", and "Help". The "Help" tab is highlighted in yellow. On the left side, there is a small image of the router and the model number "DI-824VUP+". The main content area is divided into four sections: "Home", "Advanced", "Tools", and "Status", each with a list of links.

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Home

- [Setup Wizard](#)
- [Wireless](#)
- [WAN Settings](#)
- [LAN Settings](#)
- [DHCP Server](#)
- [VPN](#)

Advanced

- [Virtual Server](#)
- [Special Applications](#)
- [Filters](#)
- [Firewall Rules](#)
- [SNMP](#)
- [DDNS](#)
- [Routing](#)
- [DMZ](#)
- [Wireless Performance](#)

Tools

- [Administrator Settings](#)
- [System Time](#)
- [System Settings](#)
- [Firmware Upgrade](#)
- [Miscellaneous Items](#)

Status

- [Device Information](#)

This screen displays the complete **Help** menu. For help at anytime, click the **Help** tab in the Configuration menu.


Installing the Print Server Software

Insert the installation CD-ROM into the CD-ROM drive. The following window will be shown automatically. If it is not, please run “autorun.exe” on the CD-ROM.

Click Install Print Server Software




Select your Windows operating system

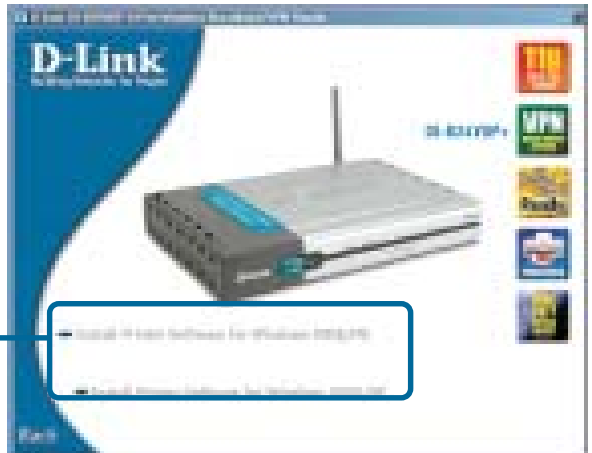

Installing the Print Server Software (continued)


Wait until the following **Welcome** dialog appears.

Click Next

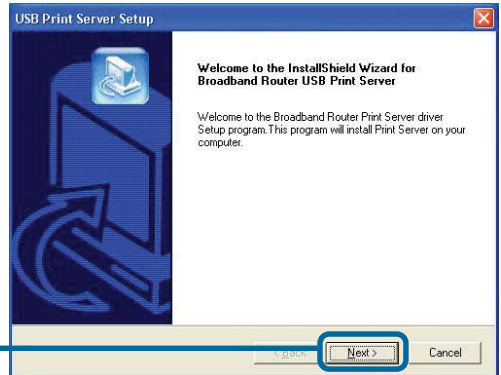

Select the destination folder.


Click Next

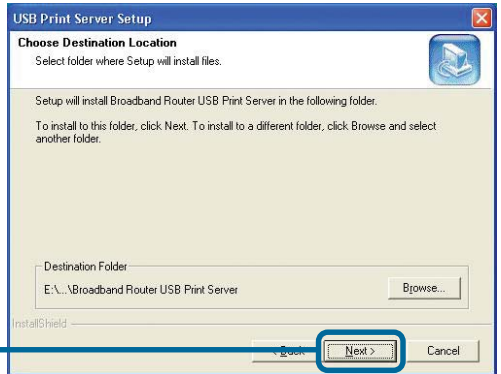

Then, the setup program will begin to install the programs into the destination folder.


When the following window is displayed.

Click Finish

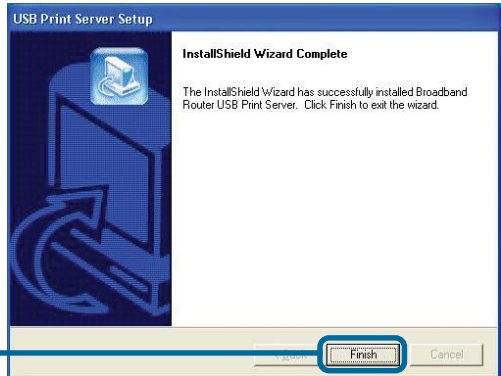

After rebooting your computer, the software installation procedure is finished.

Click OK

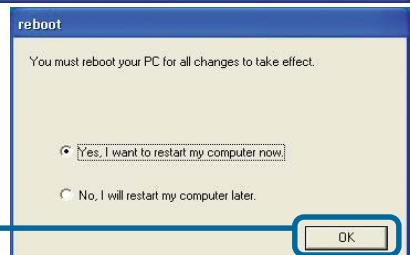


Configuring on Windows 98se/Me Platforms

After you finish the software installation procedure, your computer will be capable of network printing provided by the DI-824VUP+. For convenience, we call the printer connected to the printer port of the DI-824VUP+ a *printer server*. On a Windows 95/98 platform, open the **Printers** window in the **My Computer** menu.



Now, you can configure the print server of the DI-824VUP+:


Find out the corresponding icon of your *printer server*, for example, the **HP LaserJet 6L**. Right click on that icon, and then select **Properties**.

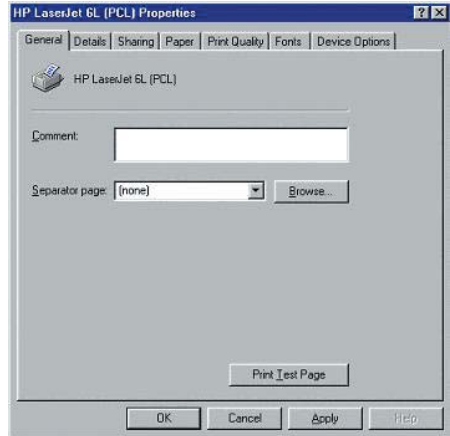

The following screen appears:


Click on the **Details** tab

Choose the “PRTmate: (All-in-1)” from the list attached at the **Print To** item. Be sure that the **Printer Driver** item is configured to the correct driver of your *printer server*.

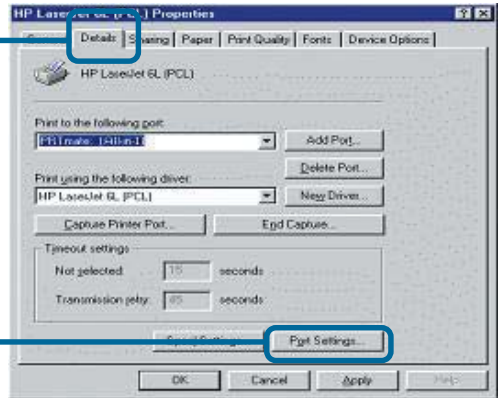

Click **Port Settings**

Choose your printer interface.
Type in the IP address of the DI-824VUP+.

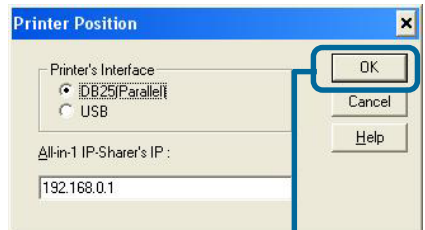


Click **OK**

Configuring on Windows 2000/XP Platforms


Click **P**ort

The configuration procedure for a Windows 2000/XP platform is similar to that of Windows 95/98 except the screen of printer **Properties**.

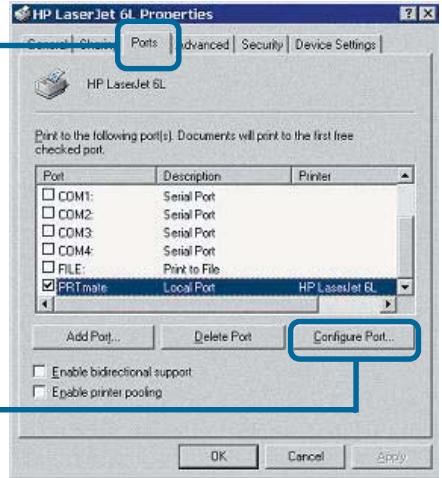

Click **C**onfigure Port

Choose your printer interface.
Type in the IP address of the DI-824VUP+.

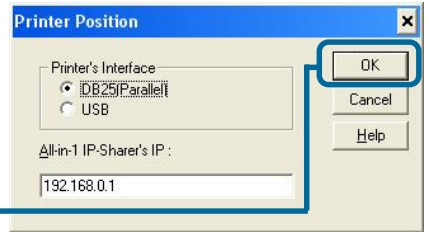

Click **O**K

(Note: Screen shots are taken in Windows 2000, similar screens will appear in Windows XP.)


Networking Basics

Using the Network Setup Wizard in Windows XP

In this section you will learn how to establish a network at home or work, using **Microsoft Windows XP**.

Note: Please refer to websites such as <http://www.homenethelp.com> and <http://www.microsoft.com/windows2000> for information about networking computers using Windows 2000, ME or 98.


Go to **Start > Control Panel > Network Connections**
Select **Set up a home or small office network**

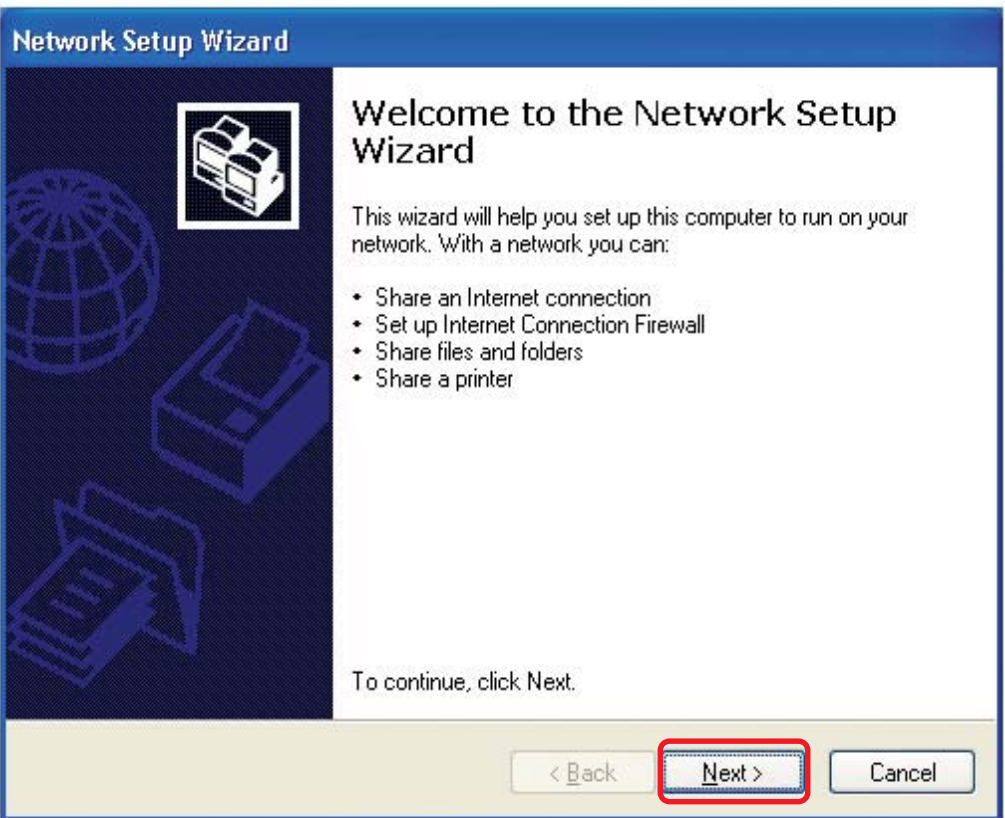

When this screen appears, **Click Next.**


Networking Basics

Please follow all the instructions in this window:

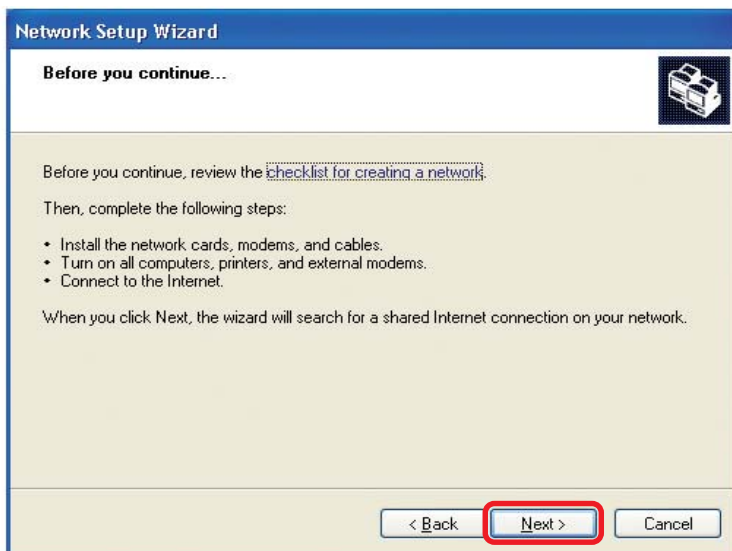

Click **Next**.


In the following window, select the best description of your computer. If your computer connects to the internet through a gateway/router, select the second option as shown.

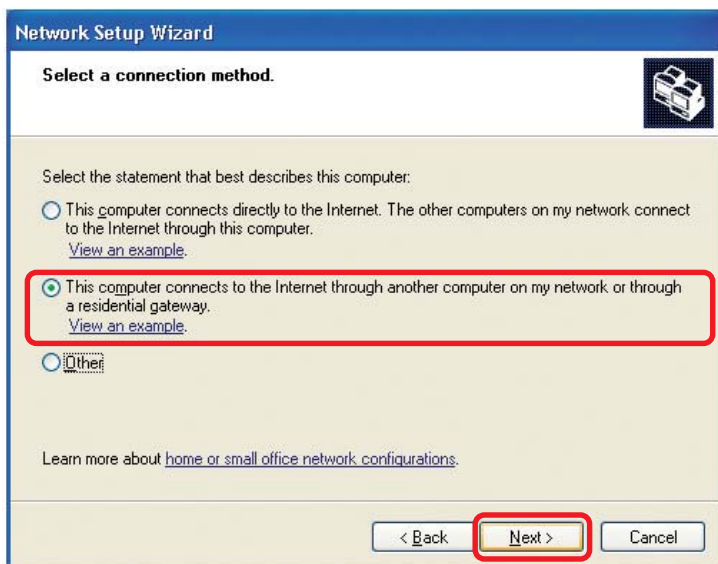

Click **Next**.

Networking Basics


Enter a **Computer description** and a **Computer name** (optional).

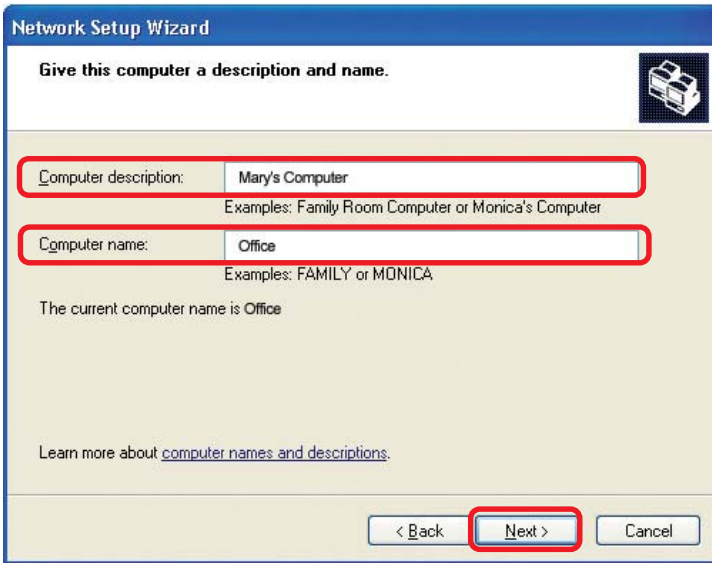

The screenshot shows the 'Network Setup Wizard' window with the title 'Give this computer a description and name.' The window contains two text input fields, both highlighted with red rectangles. The first field is labeled 'Computer description:' and contains the text 'Mary's Computer'. Below it, there are examples: 'Examples: Family Room Computer or Monica's Computer'. The second field is labeled 'Computer name:' and contains the text 'Office'. Below it, there are examples: 'Examples: FAMILY or MONICA'. Below the fields, it says 'The current computer name is Office'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a red rectangle.

Click **Next**.

Enter a **Workgroup** name. All computers on your network should have the same **Workgroup name**.

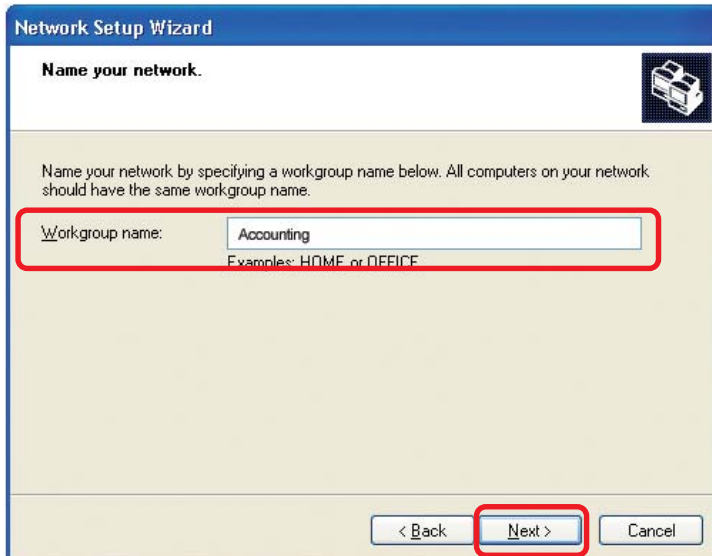


The screenshot shows the 'Network Setup Wizard' window with the title 'Name your network.' The window contains a text input field highlighted with a red rectangle, labeled 'Workgroup name:' and containing the text 'Accounting'. Below it, there are examples: 'Examples: HOME or OFFICE'. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a red rectangle.

Click **Next**.


Networking Basics

Please wait while the **Network Setup Wizard** applies the changes.

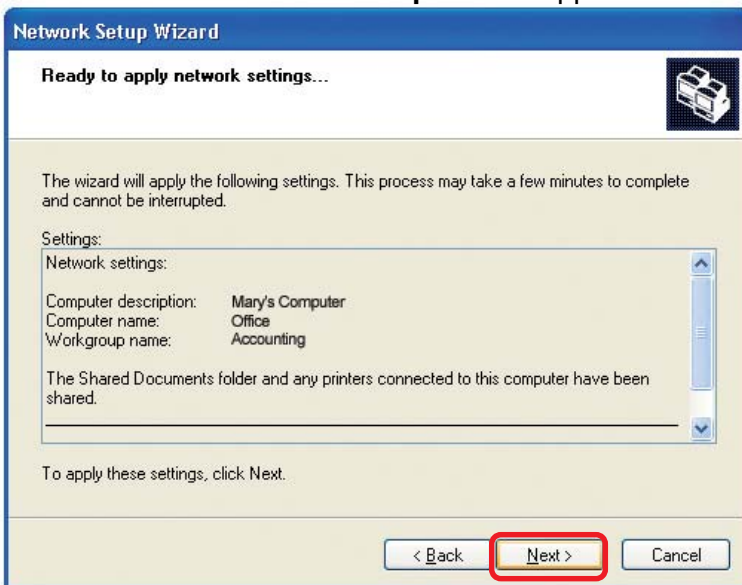


When the changes are complete, click **Next**.

Please wait while the **Network Setup Wizard** configures the computer. This may take a few minutes.

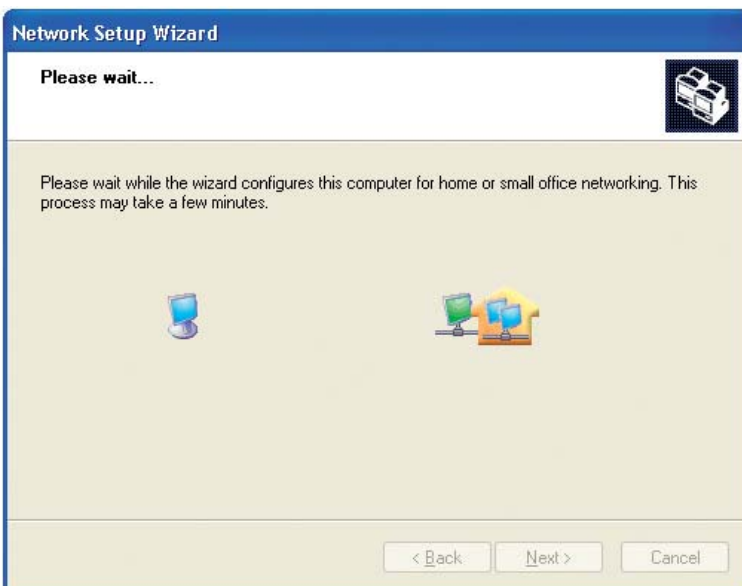

Networking Basics


In the window below, select the option that fits your needs. In this example, **Create a Network Setup Disk** has been selected. You will run this disk on each of the computers on your network. Click **Next**.

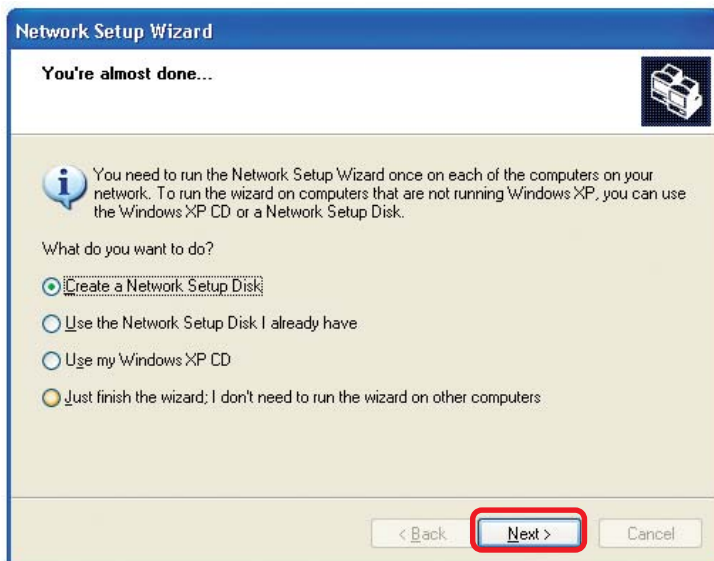


Insert a disk into the Floppy Disk Drive, in this case drive **A**.



Networking Basics

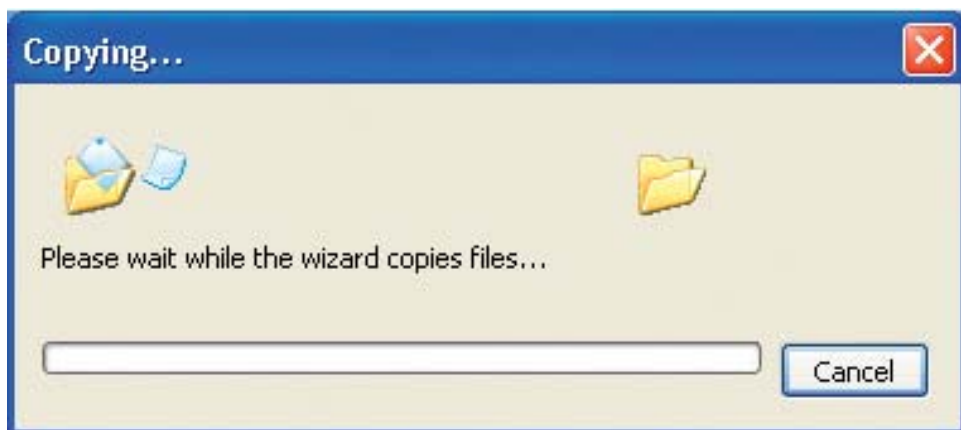


Please read the information under **Here's how** in the screen below. After you complete the **Network Setup Wizard** you will use the **Network Setup Disk** to run the **Network Setup Wizard** once on each of the computers on your network. To continue click **Next**.

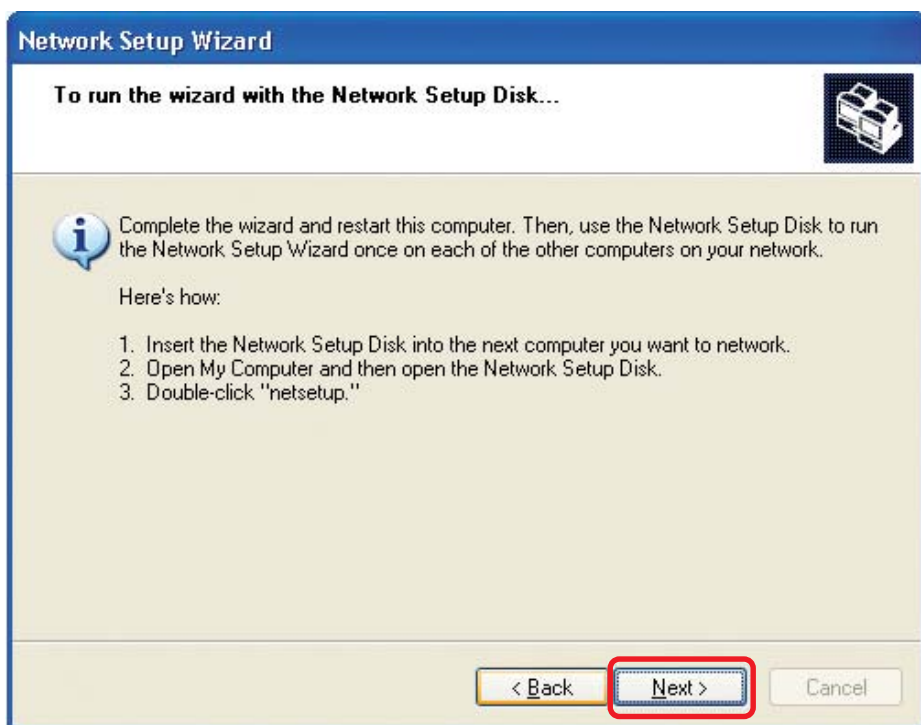


Networking Basics

Please read the information on this screen, then click **Finish** to complete the **Network Setup Wizard**.

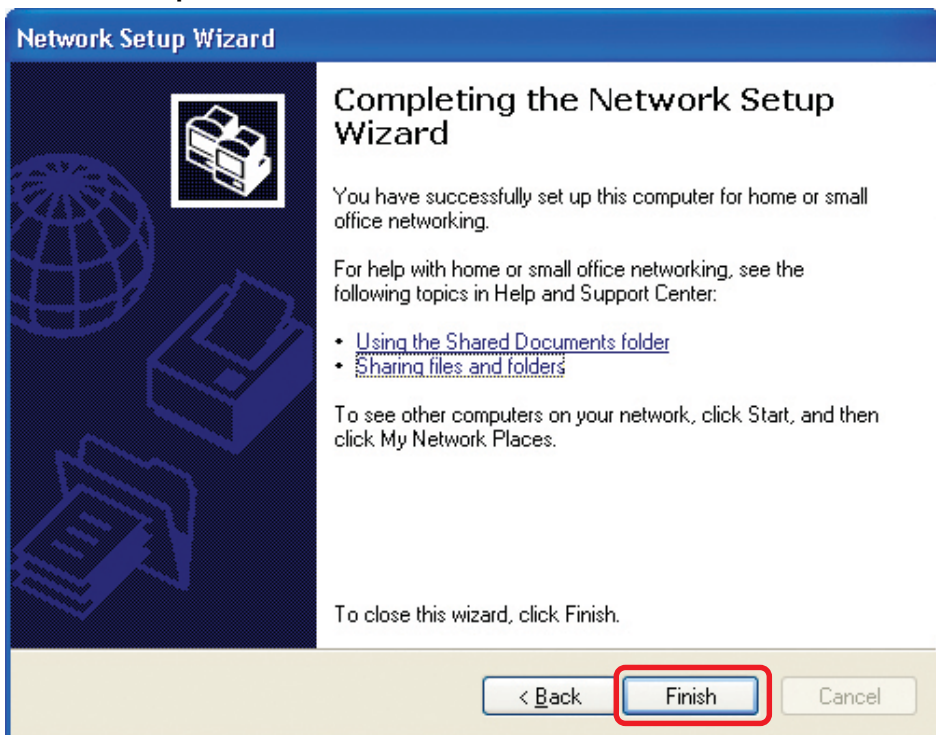

The new settings will take effect when you restart the computer. Click **Yes** to restart the computer.

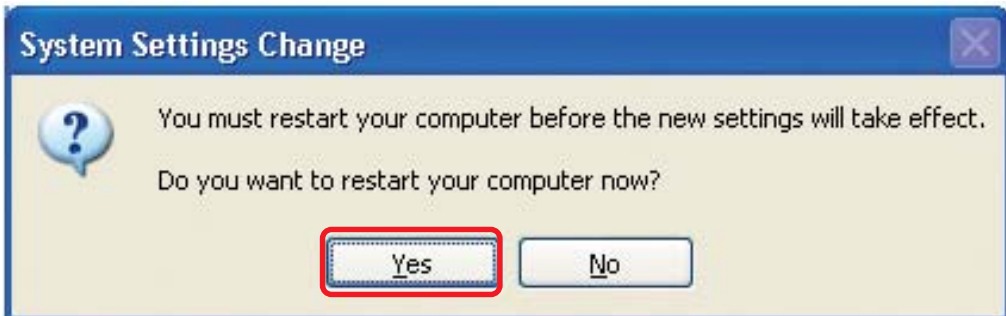


You have completed configuring this computer. Next, you will need to run the **Network Setup Disk** on all the other computers on your network. After running the **Network Setup Disk** on all your computers, your new wireless network will be ready to use.

Networking Basics


Naming your Computer

To name your computer, please follow these directions: In **Windows XP**:

- Click **Start** (in the lower left corner of the screen).
- **Right-click** on **My Computer**.
- Select **Properties** and click.

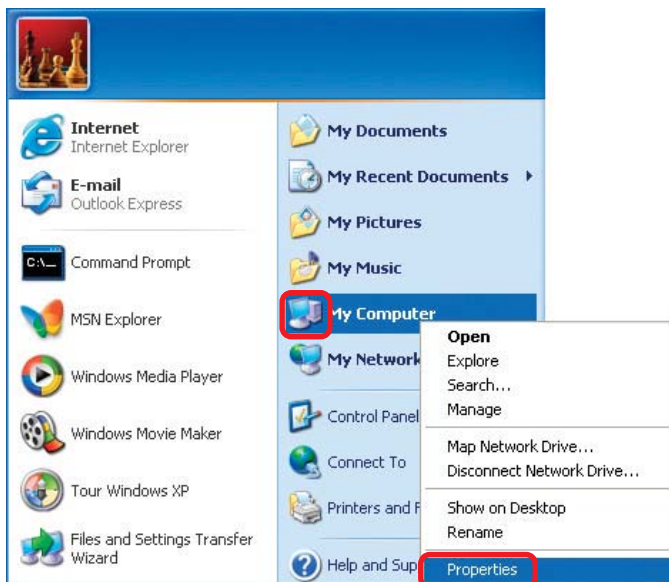

- Select the **Computer Name Tab** in the System Properties window.

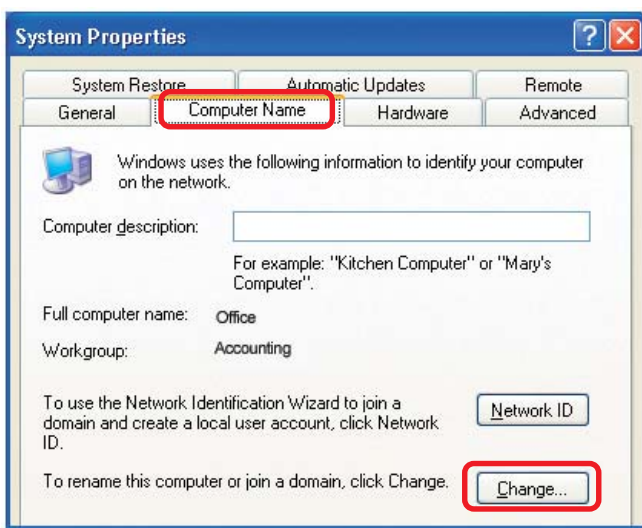


- You may enter a **Computer Description** if you wish; this field is optional.
- To rename the computer and join a domain, Click **Change**.

Networking Basics

Naming your Computer


- In this window, enter the **Computer name**.
- Select **Workgroup** and enter the name of the **Workgroup**.
- All computers on your network must have the same **Workgroup** name.
- Click **OK**.

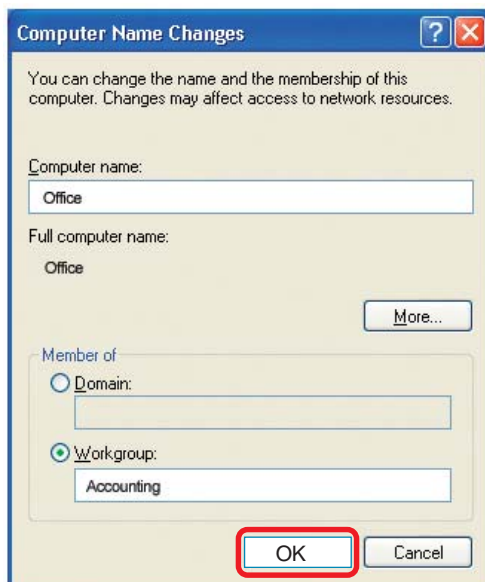

Checking the IP Address in Windows XP

The wireless adapter-equipped computers in your network must be in the same IP Address range (see Getting Started in this manual for a definition of IP Address Range). To check on the IP Address of the adapter, please do the following:

- Right-click on the **Local Area Connection icon** in the task bar.
- Click on **Status**.

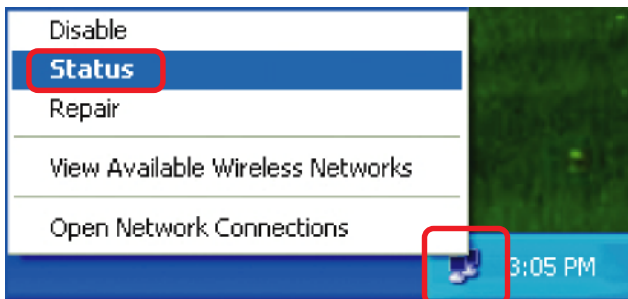


Networking Basics

Checking the IP Address in Windows XP

This window will appear.

- Click the **Support** tab.
- Click **Close**.

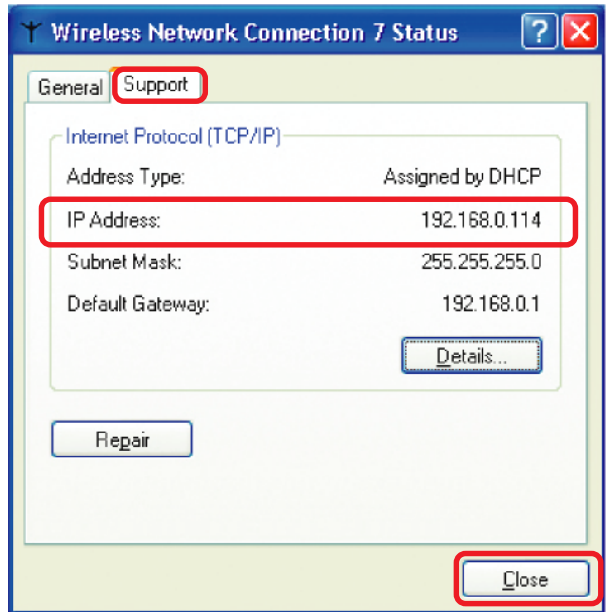


Assigning a Static IP Address in Windows XP/2000

Note: Residential Gateways/Broadband Routers will automatically assign IP Addresses to the computers on the network, using DHCP (Dynamic Host Configuration Protocol) technology. If you are using a DHCP-capable Gateway/Router you will not need to assign Static IP Addresses.

If you are not using a DHCP capable Gateway/Router, or you need to assign a Static IP Address, please follow these instructions:


- Go to **Start**.
- Double-click on **Control Panel**.

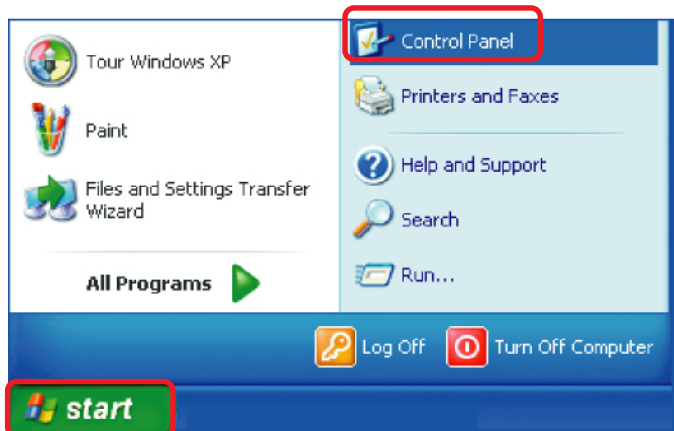

Networking Basics


Assigning a Static IP Address in Windows XP/2000

- Double-click on **Network Connections**.

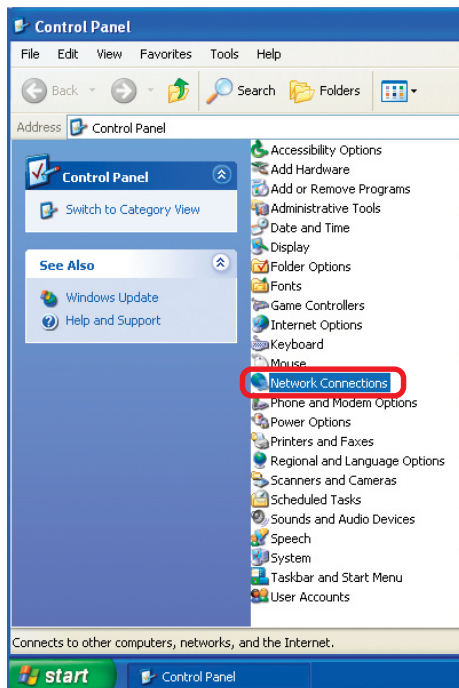

- Right-click on **Local Area Connections**.

- Single-click on **Properties**.

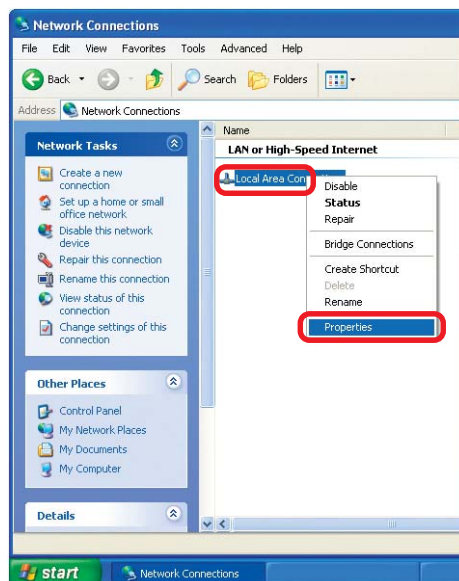


Networking Basics

Assigning a Static IP Address in Windows XP/2000

- Click on **Internet Protocol (TCP/IP)**.
- Click **Properties**.
- Input your **IP address and subnet mask**. (The IP Addresses on your network must be within the same range. For example, if one computer has an IP Address of 192.168.0.2, the other computers should have IP Addresses that are sequential, like 192.168.0.3 and 192.168.0.4. The subnet mask must be the same for all the computers on the network.)
- Input your **DNS server addresses**. (Note: If you are entering a DNS server, you must enter the IP Address of the Default Gateway.)

The DNS server information will be supplied by your ISP (Internet Service Provider).


- Click **OK**.

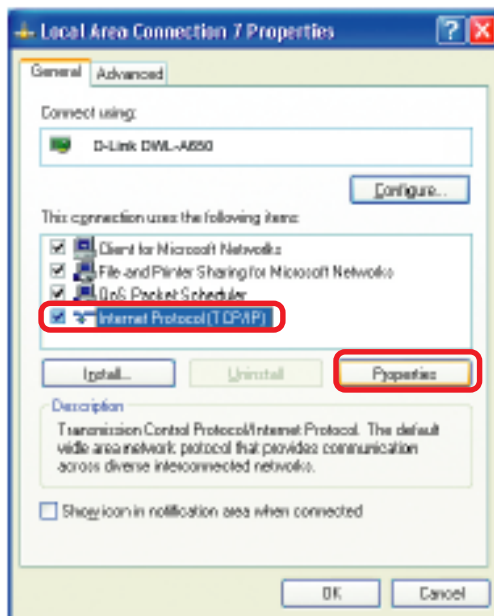


Networking Basics

Assigning a Static IP Address with Macintosh OS X


- Go to the **Apple Menu** and select **System Preferences**.
- Click on **Network**.

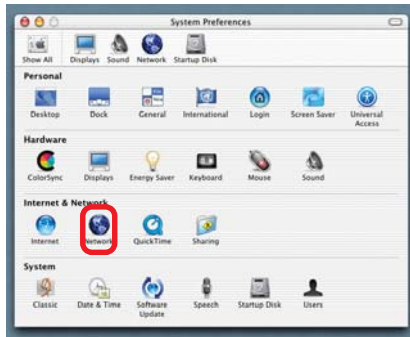

- Select **Built-in Ethernet** in the **Show** pull-down menu.
- Select **Manually** in the **Configure** pull-down menu.

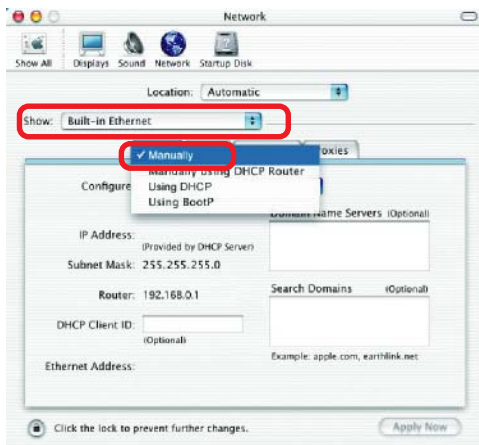

- Input the **Static IP Address**, the **Subnet Mask** and the **Router IP Address** in the appropriate fields.

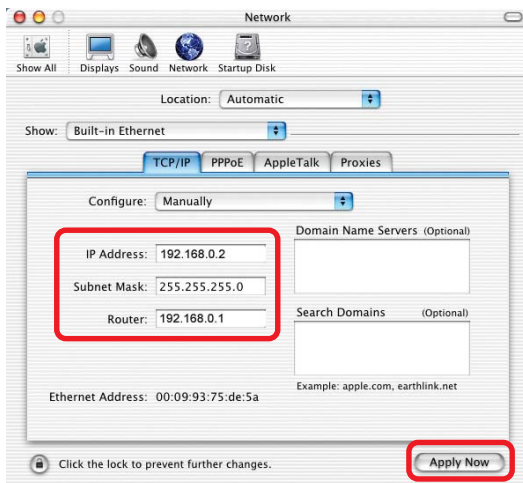


- Click **Apply Now**.

Networking Basics


Selecting a Dynamic IP Address with Macintosh OSX

- Go to the **Apple Menu** and select **System Preferences**.

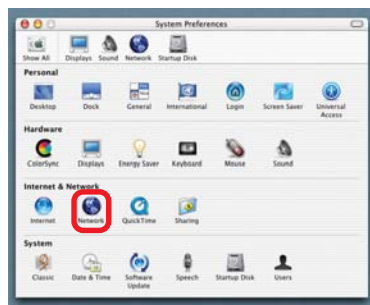

- Click on **Network**.


- Select **Built-in Ethernet** in the **Show** pull-down menu.

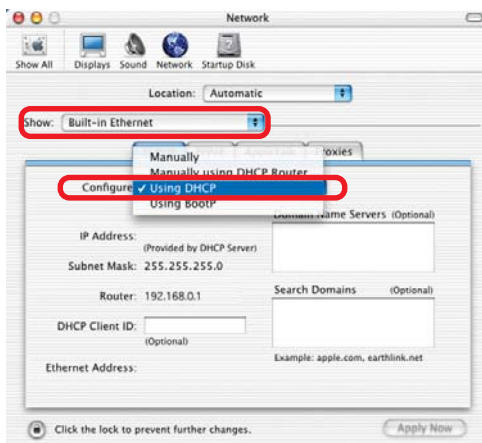

- Select **Using DHCP** in the **Configure** pull-down menu.

- Click **Apply Now**.


- The **IP Address**, **Subnet mask**, and the **Router's IP Address** will appear in a few seconds.

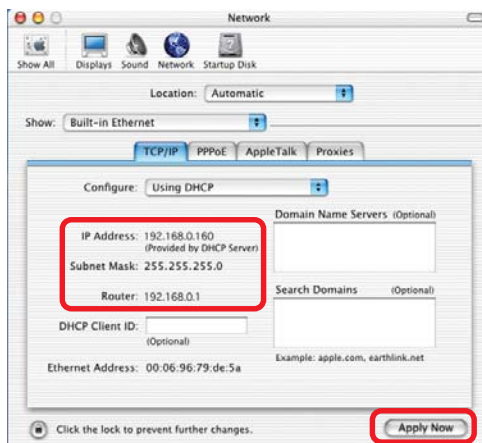

Networking Basics

Checking the Wireless Connection by Pinging in Windows XP and 2000

- Go to **Start > Run >** type **cmd**. A window similar to this one will appear. Type **ping xxx.xxx.xxx.xxx**, where **xxx** is the **IP Address** of the Wireless Router or Access Point. A good wireless connection will show four replies from the Wireless Router or Access Point, as shown.

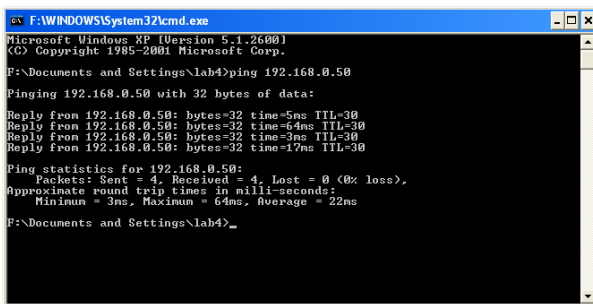

```
ex F:\WINDOWS\System32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

F:\Documents and Settings\lab4>ping 192.168.0.50

Pinging 192.168.0.50 with 32 bytes of data:


Reply from 192.168.0.50: bytes=32 time=5ms TTL=30
Reply from 192.168.0.50: bytes=32 time=64ms TTL=30
Reply from 192.168.0.50: bytes=32 time=3ms TTL=30
Reply from 192.168.0.50: bytes=32 time=17ms TTL=30

Ping statistics for 192.168.0.50:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 3ms, Maximum = 64ms, Average = 22ms

F:\Documents and Settings\lab4>
```

Checking the Wireless Connection by Pinging in Windows Me and 98

- Go to **Start > Run >** type **command**. A window similar to this will appear. Type **ping xxx.xxx.xxx.xxx** where **xxx** is the **IP Address** of the Wireless Router or Access Point. A good wireless connection will show four replies from the wireless router or access point, as shown.

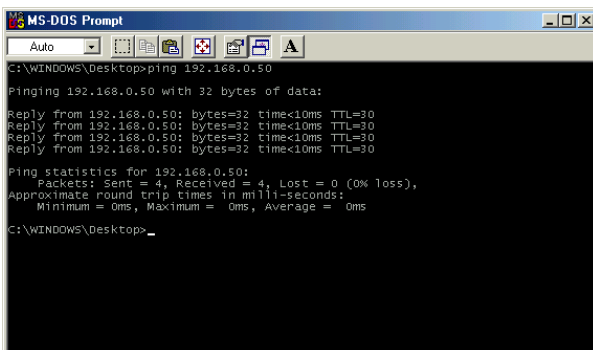

```
MS-DOS Prompt
Auto
C:\WINDOWS\Desktop>ping 192.168.0.50

Pinging 192.168.0.50 with 32 bytes of data:

Reply from 192.168.0.50: bytes=32 time<10ms TTL=30
Reply from 192.168.0.50: bytes=32 time<10ms TTL=30
Reply from 192.168.0.50: bytes=32 time<10ms TTL=30
Reply from 192.168.0.50: bytes=32 time<10ms TTL=30

Ping statistics for 192.168.0.50:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\WINDOWS\Desktop>
```

Networking Basics

Adding and Sharing Printers in Windows XP

After you have run the **Network Setup Wizard** on all the computers in your network (please see the **Network Setup Wizard** section at the beginning of **Networking Basics**), you can use the **Add Printer Wizard** to add or share a printer on your network.

Whether you want to add a **local printer** (a printer connected directly to one computer), share an **LPR printer** (a printer connected to a print server), or share a **network printer** (a printer connected to your network through a Gateway/Router), use the **Add Printer Wizard**. Please follow the directions below:

First, make sure that you have run the Network Setup Wizard on all of the computers on your network.

On the following pages, we will show you these 3 ways to use the **Add Printer Wizard**:

- 1. Adding a local printer**
- 2. Sharing an network printer**
- 3. Sharing an LPR printer**

(Other Networking Tasks)


For help with other tasks, that we have not covered here, in home or small office networking, see **Using the Shared Documents** folder and **Sharing files and folders** in the **Help and Support Center** in Microsoft **Windows XP**.

Networking Basics


Adding a local printer (a printer connected directly to a computer)

A printer that is not shared on the network and is connected directly to one computer is called a **local printer**. If you do not need to share your printer on a network, follow these directions to add the printer to one computer.

- Go to **Start > Printers and Faxes**

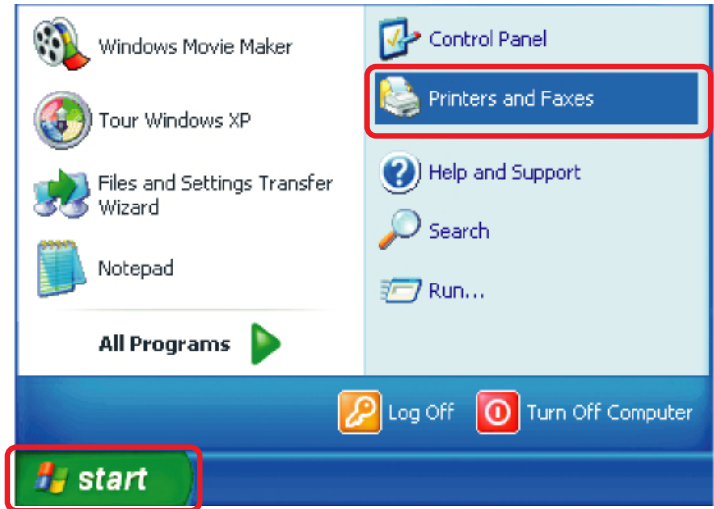


- Click on **Add a printer.**

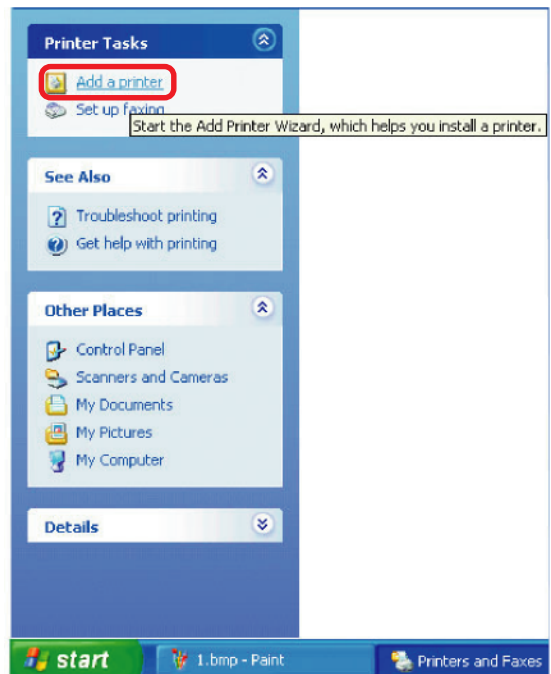

Networking Basics

Adding a local printer



- Click **Next**.
- Select **Local printer attached to this computer**.
- *(Deselect **Automatically detect and install my Plug and Play printer** if it has been selected.)*

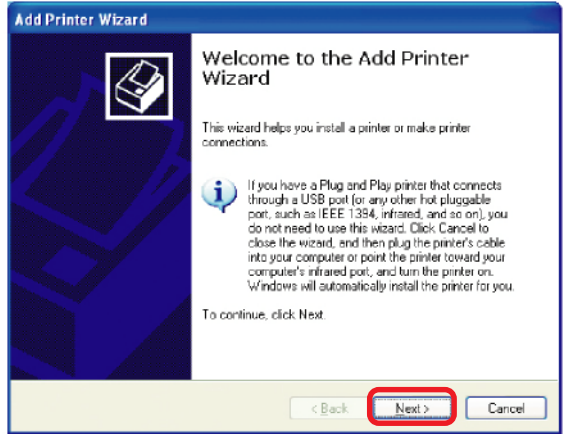

- Click **Next**.
- Select **Use the following port**:
- From the pull-down menu **select the correct port** for your printer.

*(Most computers use the **LPT1:** port, as shown in the illustration.)*

- Click **Next**.

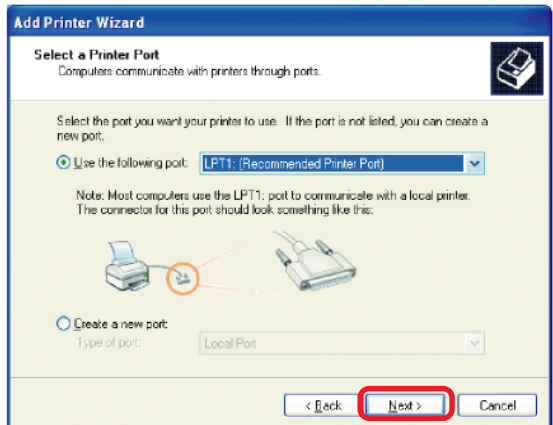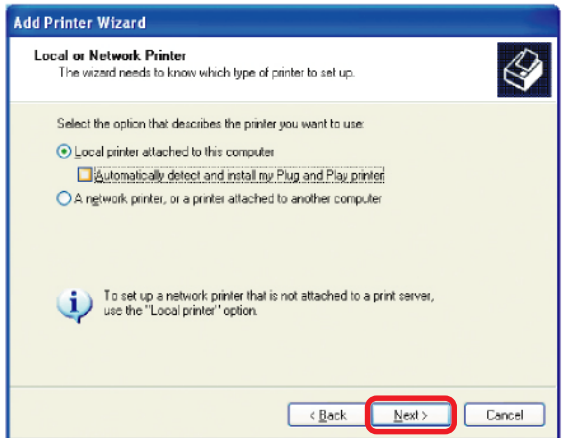

Networking Basics

Adding a local printer

- Select and highlight the **correct driver** for your printer.

- Click **Next**.




*(If the correct driver is not displayed, insert the CD or floppy disk that came with your printer and click **Have Disk**.)*

- At this screen, you can change the name of the printer (optional).

- Click **Next**.

- Select **Yes**, to print a test page. A successful printing will confirm that you have chosen the correct driver.


- Click **Next**.

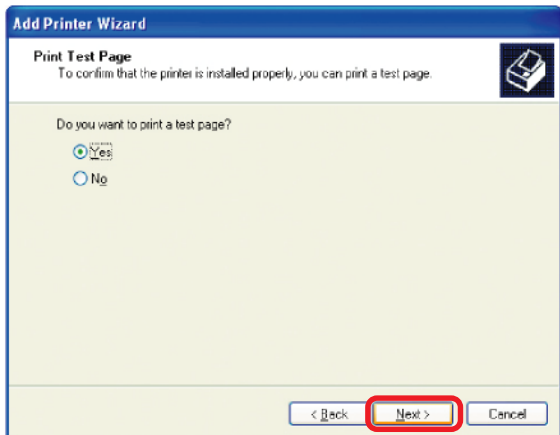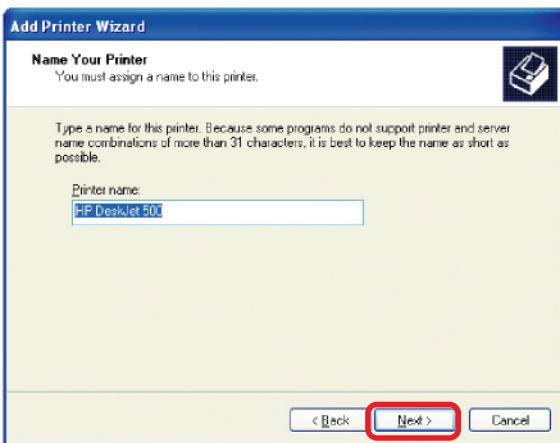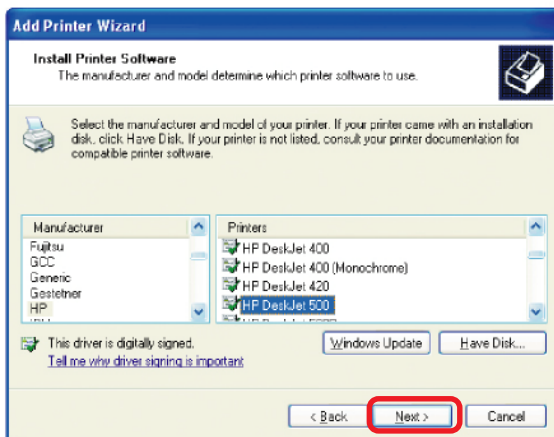

Networking Basics


Adding a local printer

This screen gives you information about your printer.

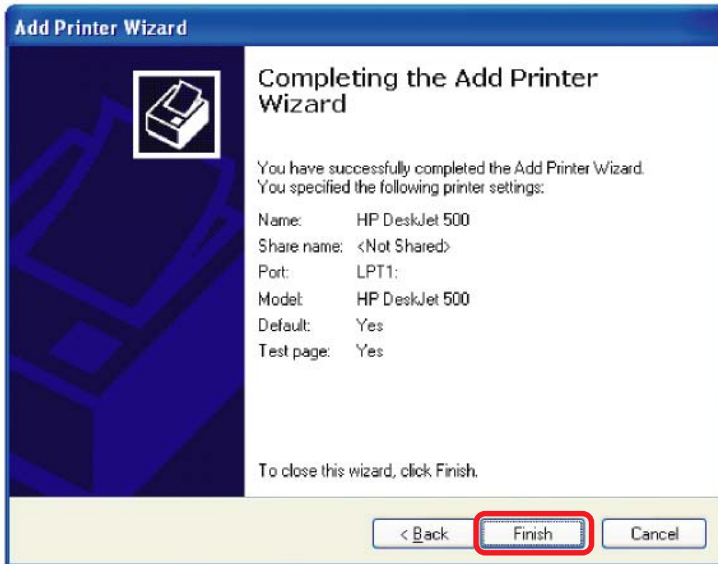

Click **Finish**.

When the test page has printed,

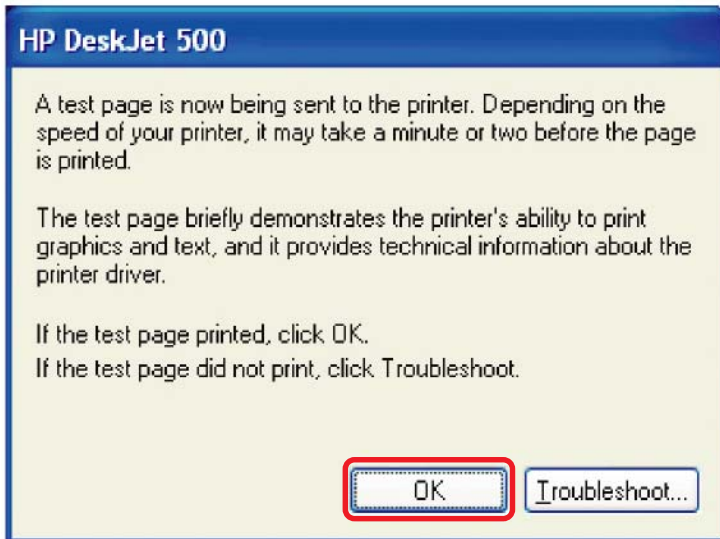

Click **OK**.


Networking Basics

Adding a local printer

- Go to **Start > Printers and Faxes**.

A successful installation will display the printer icon as shown at right.


You have successfully added a local printer.

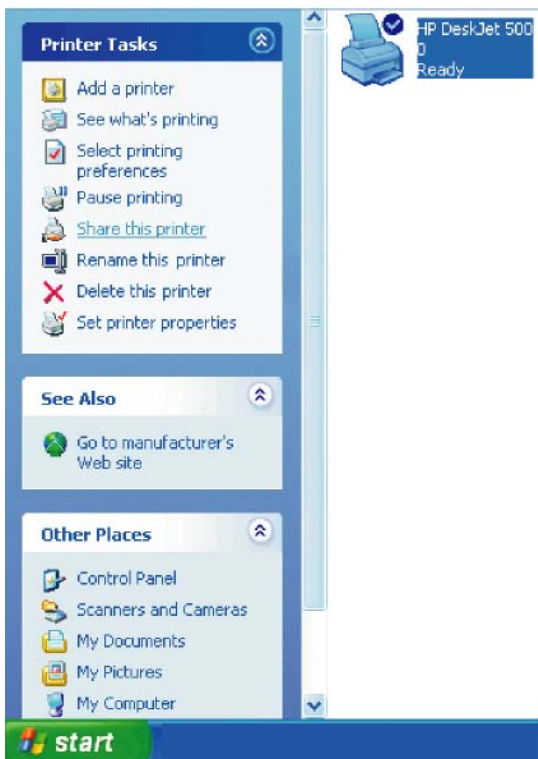

Sharing a network printer

After you have run the **Network Setup Wizard** on all the computers on your network, you can run the **Add Printer Wizard** on all the computers on your network. Please follow these directions to use the **Add Printer Wizard** to share a printer on your network:

- Go to **Start > Printers and Faxes**

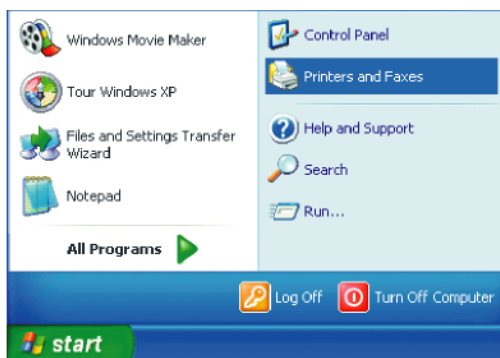

Networking Basics

Sharing a network printer


- Click on **Add a printer.**



- Click **Next.**



- Select **Network Printer.**

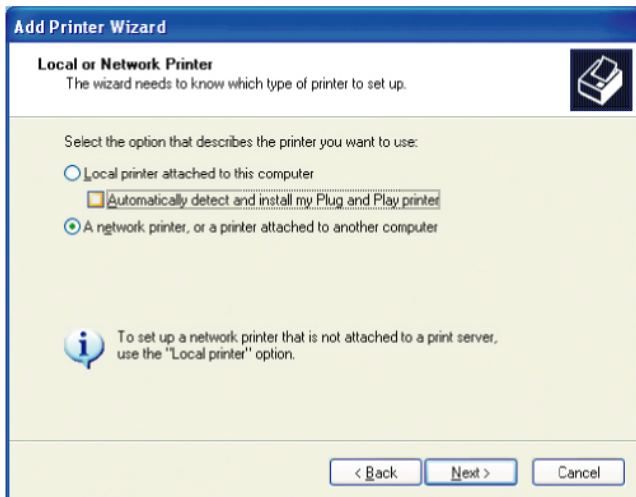

- Click **Next.**

Networking Basics




Sharing a network printer

- Select **Browse for a printer** for a printer.

- Click **Next**.

- Select the **printer** you would like to share.

- Click **Next**.

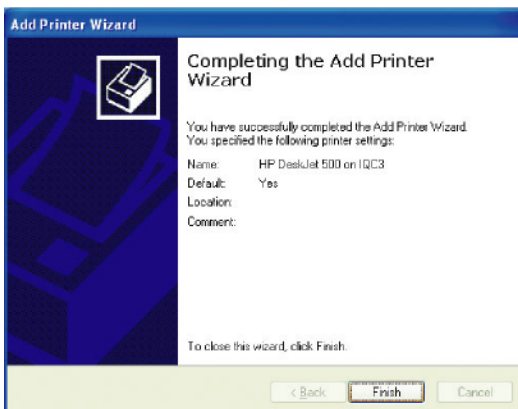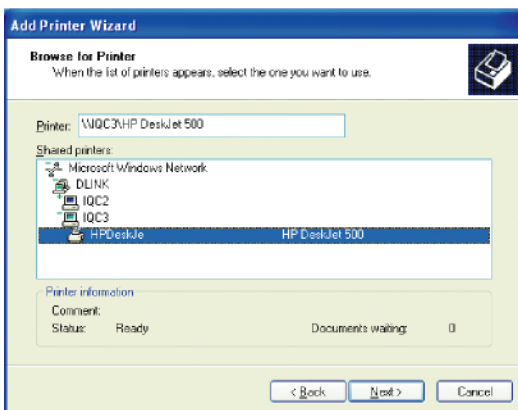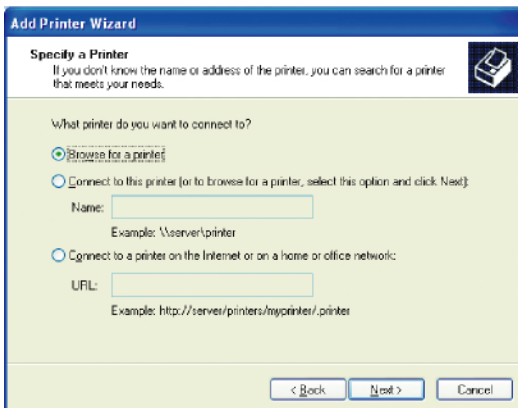


- Click **Finish**.

Networking Basics

Sharing a network printer

- To check for proper installation:
- Go to **Start > Printers and Faxes**.

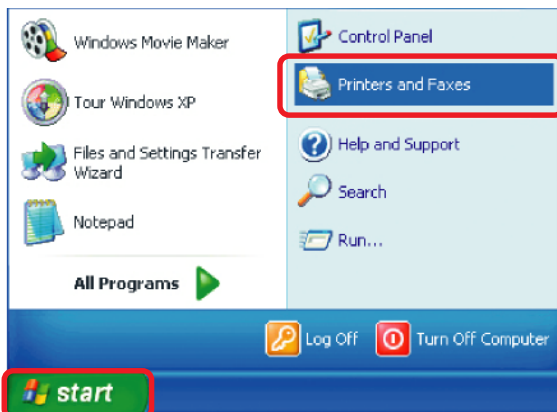


The printer icon will appear at right, indicating proper installation.

You have completed adding the printer.

To share this printer on your network:

- Remember the **printer name**.
- Run the **Add Printer Wizard** on all the computers on your network.
- Make sure you have already run the **Network Setup Wizard** on all the network computers.

After you run the **Add Printer Wizard** on all the computers in the network, you can share the printer.

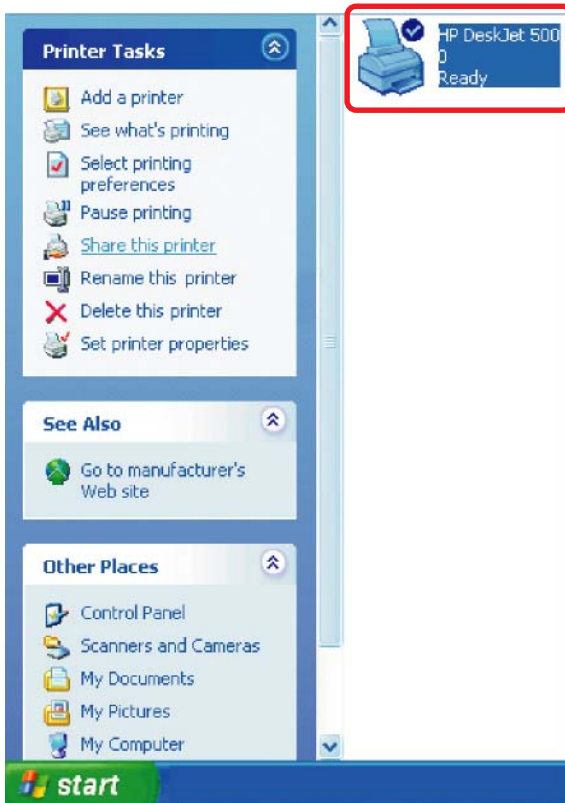

Networking Basics

Sharing an LPR printer

To share an **LPR printer** (using a print server,) you will need a Print Server such as the **DP-101P+**. Please make sure that you have run the **Network Setup Wizard** on all the computers on your network. To share an **LPR printer**, please follow these directions:


- Go to **Start > Printers and Faxes**.
- Click on **Add a Printer**.

The screen to the right will appear.



- Click **Next**.

- Select **Local Printer**.

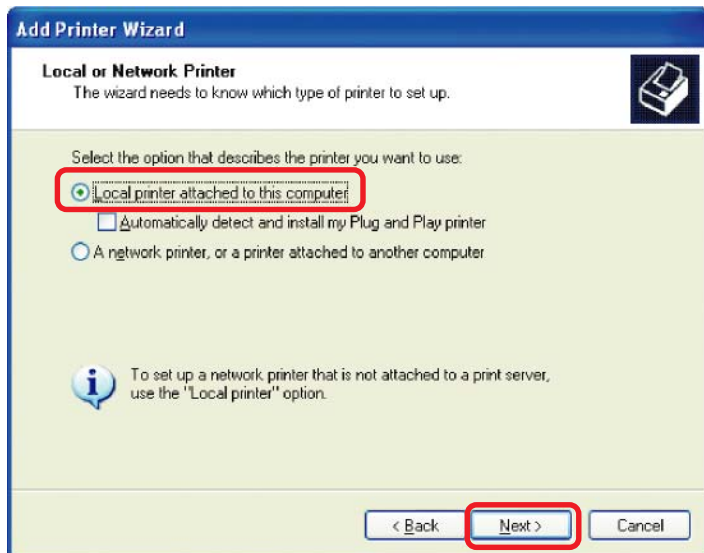

- Click **Next**.


Networking Basics

Sharing an LPR printer

- Select **Create a new port**.


- From the pull-down menu, select **Standard TCP/IP Port**, as shown.

- Click **Next**.

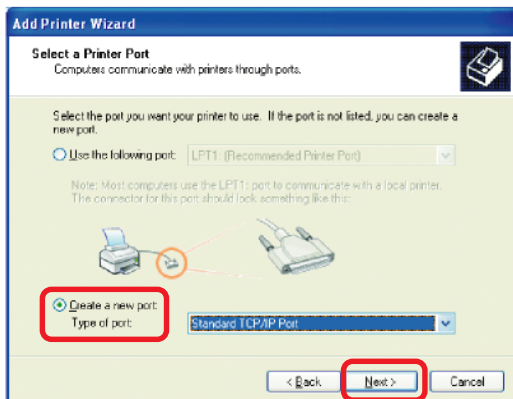


- Please read the instructions on this screen.

- Click **Next**.

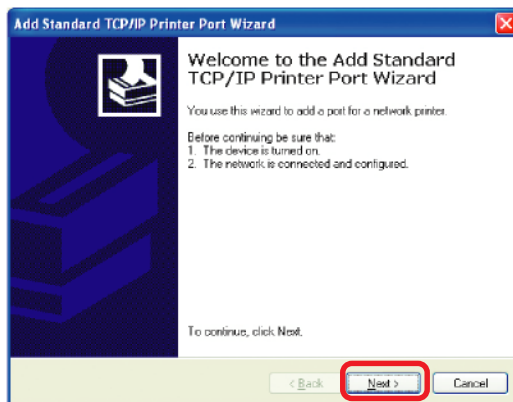

- Enter the **Printer IP Address** and the **Port Name**, as shown.

- Click **Next**.

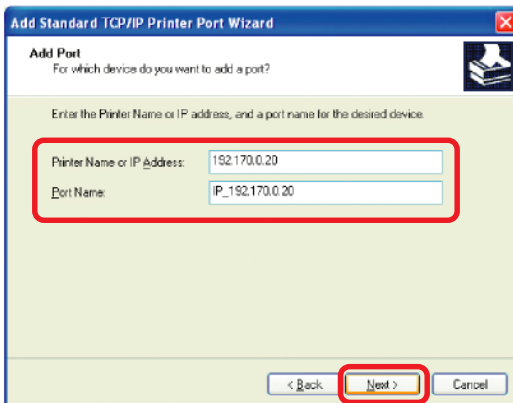

Networking Basics

Sharing an LPR printer

- In this screen, select **Custom**.

- Click **Settings**.

Add Standard TCP/IP Printer Port Wizard

Additional Port Information Required
The device could not be identified.

The detected device is of unknown type. Be sure that:

1. The device is properly configured.
2. The address on the previous page is correct.

Either correct the address and perform another search on the network by returning to the previous wizard page or select the device type if you are sure the address is correct.

Device Type

Standard Generic Network Card

Custom **Settings...**

< Back Next > Cancel

- Enter the **Port Name** and the **Printer Name** or **IP Address**.

- Select **LPR**.

- Enter a **Queue Name** (if your Print-Server/ Gateway has more than one port, you will need a **Queue name**).

- Click **OK**.

Configure Standard TCP/IP Port Monitor

Port Settings

Port Name: IP_192.170.0.20

Printer Name or IP Address: 192.170.0.20

Protocol

Raw **LPR**

Raw Settings

Port Number: 9100

LPR Settings

Queue Name: lp

LPR Byte Counting Enabled

SNMP Status Enabled

Community Name: public


SNMP Device Index: 1

OK Cancel

Networking Basics


Sharing an LPR printer

- This screen will show you information about your printer.

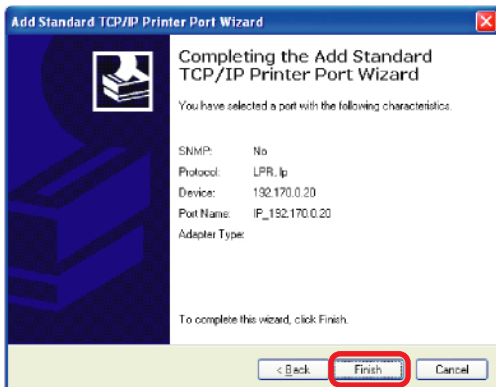

- Click **Finish**.

- Select the **printer** you are adding from the list of **Printers**.

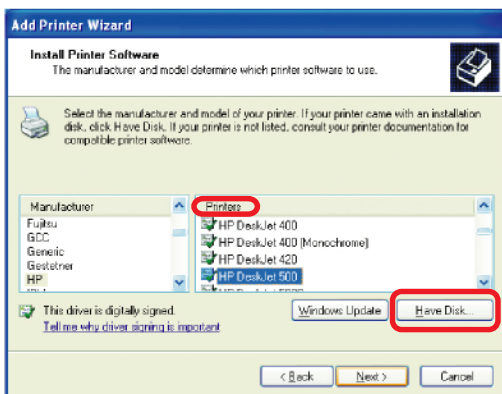


- Insert the printer driver disk that came with your printer.

- Click **Have Disk**.

If the printer driver is already installed, do the following:

- Select **Keep existing driver**.

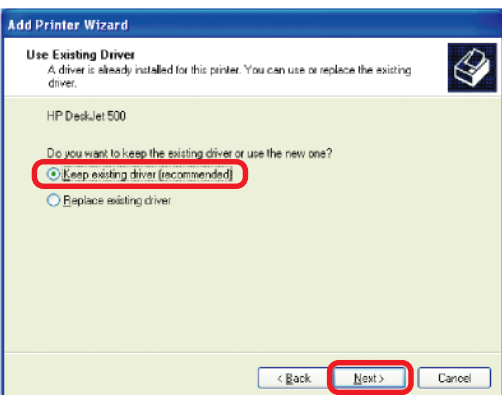


- Click **Next**.


Networking Basics

Sharing an LPR printer

- You can rename your printer if you choose. It is optional.
- *Please remember the name of your printer. You will need this information when you use the **Add Printer Wizard** on the other computers on your network.*
- Click **Next**.

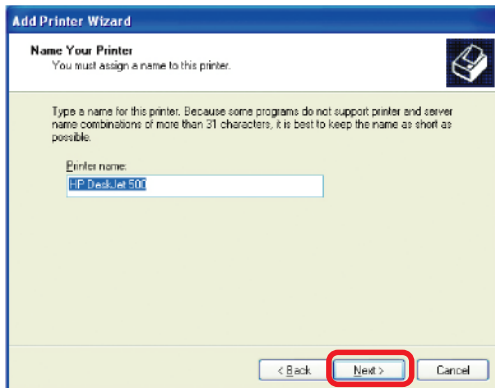


- Select **Yes**, to print a test page.
- Click **Next**.

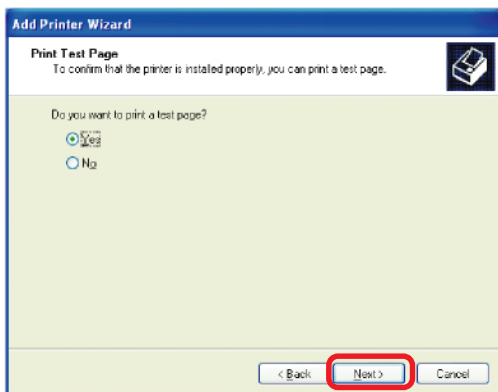

This screen will display information about your printer.

- Click **Finish** to complete the addition of the printer.
- Please run the **Add Printer Wizard** on all the computers on your network in order to share the printer.

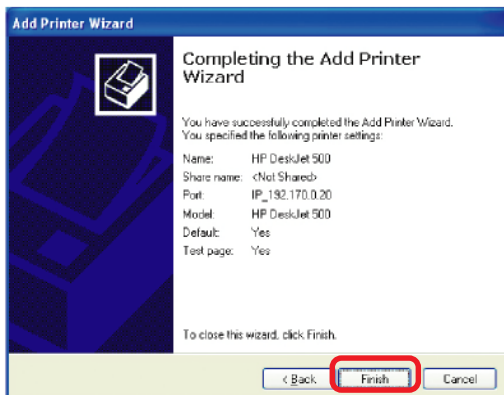

*Note: You must run the **Network Setup Wizard** on all the computers on your network before you run the **Add Printer Wizard**.*

Resetting the DI-824VUP+ to the Factory Default Settings

After you have tried other methods for troubleshooting your network, you may choose to **Reset** the DI-824VUP+ to the factory default settings.



To hard-reset the D-Link DI-824VUP+ to the Factory Default Settings, please do the following:

- Locate the **Reset** button on the back of the DI-824VUP+.
- Use a paper clip to press the **Reset** button and power on.
- Hold for about 5 seconds (do not hold for too long) and then release. (Or, release when the status LEDflashes.)
- After you have completed the above steps, the DI-824VUP+ will be reset to the factory default settings.

Technical Specifications

Standards

- IEEE 802.11b
- IEEE 802.3
- IEEE 802.3u 100BASE-TX Fast Ethernet
- IEEE 802.11g
- USB 1.1

VPN Pass Through Function

- PPTP
- L2TP
- IPSec

LEDs

- Power
- WAN
- LAN
- WLAN
- Status
- COM
- USB
- LPT

Operating Temperature

- 32°F to 131°F (0°C to 55°C)

Humidity

- 10-90%

Power

- 5V DC / 2.5A

Dimensions

- L = 9.25 inches (233mm)
- W = 6.5 inches (165mm)
- H = 1.375 inches (35mm)

Weight

- ~2.0oz. (907g)

Ports

- 4 x 10/100 LAN Ports (MDI/MDIX)
- 1 x 10/100 WAN Port (MDI/MDIX)
- 1 COM Port (Dial-up Modem)
- 1 Parallel Port (DB25)
- 1 USB Port

Frequently Asked Questions

Why can't I access the Web-based configuration?

When entering the IP Address of the DI-824VUP+ (192.168.0.1), you are not connecting to the Internet or have to be connected to the Internet. The device has the utility built-in to a ROM chip in the device itself. Your computer must be on the same IP subnet to connect to the web-based utility.

To resolve difficulties accessing a Web utility, please follow the steps below.

Step 1 Verify physical connectivity by checking for solid link lights on the device. If you do not get a solid link light, try using a different cable or connect to a different port on the device, if possible. If the computer is turned off, the link light may not be on.

What type of cable should I be using?

The following connections require a Crossover Cable:

- Computer to Computer
- Computer to Uplink Port
- Computer to Access Point
- Computer to Print Server
- Computer/XBOX/PS2 to DWL-810
- Computer/XBOX/PS2 to DWL-900AP+
- Uplink Port to Uplink Port (hub/switch)
- Normal Port to Normal Port (hub/switch)

The following connections require a Straight-through Cable:

- Computer to Residential Gateway/Router
- Computer to Normal Port (hub/switch)
- Access Point to Normal Port (hub/switch)
- Print Server to Normal Port (hub/switch)
- Uplink Port to Normal Port (hub/switch)

Rule of Thumb:

"If there is a link light, the cable is right."

Frequently Asked Questions (continued)

Why can't I access the Web-based configuration? (continued)

What type of cable should I be using? (continued)


What's the difference between a crossover cable and a straight-through cable?

The wiring in crossover and straight-through cables are different. The two types of cable have different purposes for different LAN configurations. EIA/TIA 568A/568B define the wiring standards and allow for two different wiring color codes as illustrated in the following diagram.


**The wires with colored backgrounds may have white stripes and may be denoted that way in diagrams found elsewhere.*

How to tell straight-through cable from a crossover cable:

The main way to tell the difference between the two cable types is to compare the wiring order on the ends of the cable. If the wiring is the same on both sides, it is straight-through cable. If one side has opposite wiring, it is a crossover cable.

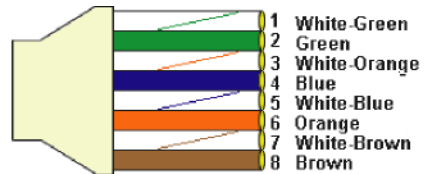

568A CABLE END

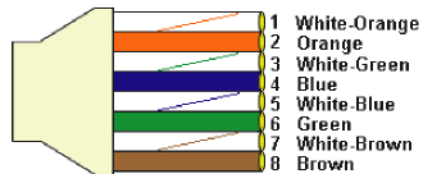

568B CABLE END

All you need to remember to properly configure the cables is the pinout order of the two cable ends and the following rules:

A straight-through cable has identical ends

A crossover cable has different ends

It makes no functional difference which standard you follow for straight-through cable ends, as long as both ends are the same. You can start a crossover cable with either standard as long as the other end is the other standard. It makes no functional difference which end is which. The order in which you pin the cable is important. Using a pattern other than what is specified in the above diagram could cause connection problems.

When to use a crossover cable and when to use a straight-through cable:

Computer to Computer – Crossover

Computer to an normal port on a Hub/Switch – Straight-through

Computer to an uplink port on a Hub/Switch – Crossover

Hub/Switch uplink port to another Hub/Switch uplink port – Crossover

Hub/Switch uplink port to another Hub/Switch normal port – Straight-through


Frequently Asked Questions (continued)

Why can't I access the Web-based configuration? (continued)


Step 2 Disable any Internet security software running on the computer. Software firewalls like Zone Alarm, Black Ice, Sygate, Norton Personal Firewall, etc. might block access to the configuration pages. Check the help files included with your firewall software for more information on disabling or configuring it.

Step 3 Configure your Internet settings.


Go to **Start > Settings > Control Panel**. Double click the **Internet Options** icon. From the **Security** tab, click the **Default Level** button to restore the settings to their defaults.

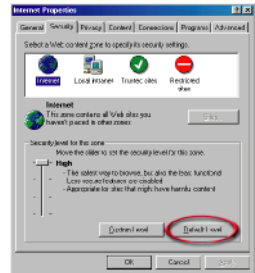


Click to the **Connection** tab and set the dial-up option to **Never Dial a Connection**. Click the **LAN Settings** button.

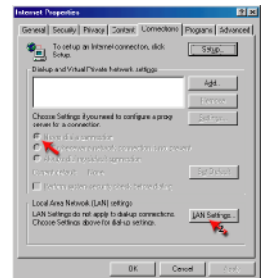

Nothing should be checked. Click **OK**.

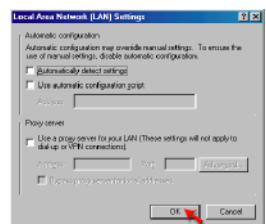

Go to the **Advanced** tab and click the **Restore Defaults** button to restore these settings to their factory defaults.

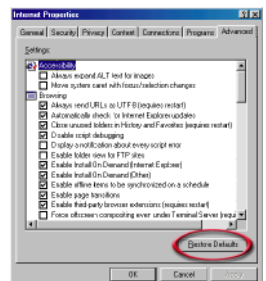

Click **OK**. Go to the desktop and close any open windows.

Frequently Asked Questions (continued)


Why can't I access the Web-based configuration? (continued)

Step 4 Check your IP address. Your computer must have an IP address in the same range of the device you are attempting to configure. Most D-Link devices use the 192.168.0.X range.

How can I find my IP Address in Windows 95, 98, or ME?


Step 1 Click on **Start**, then click on **Run**.

Step 2 The Run Dialogue Box will appear. Type **wiipcfg** in the text field and click **OK**.

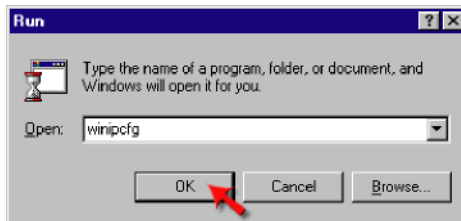

Step 3 The **IP Configuration** window will appear, displaying your **Ethernet Adapter Information**.

- Select your adapter from the drop down menu.
- If you do not see your adapter in the drop down menu, your adapter is not properly installed.

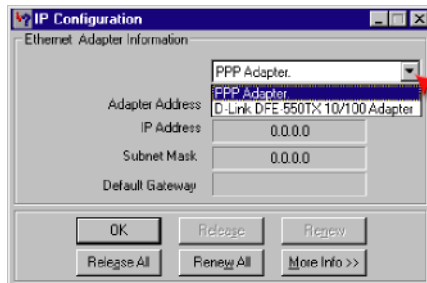

Step 4 After selecting your adapter, it will display your IP Address, subnet mask, and default gateway.

Step 5 Click **OK** to close the IP Configuration window

Frequently Asked Questions (continued)


Why can't I access the Web-based configuration? (continued)

Step 4 (continued) Check your IP address. Your computer must have an IP Address in the same range of the device you are attempting to configure. Most D-Link devices use the 192.168.0.X range.


How can I find my IP Address in Windows 2000/XP?

Step 1 Click on **Start** and select **Run**.

Step 2 Type **cmd** then click **OK**.

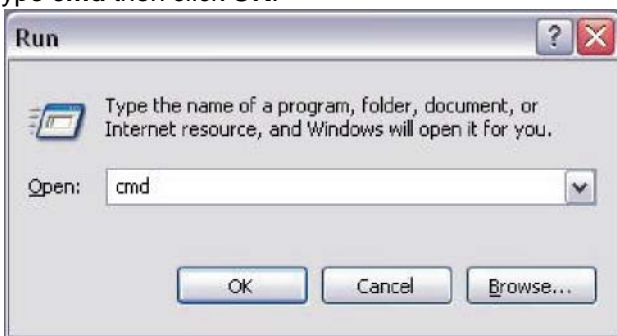

Step 3 From the Command Prompt, enter **ipconfig**. It will return your IP Address, subnet mask, and default gateway

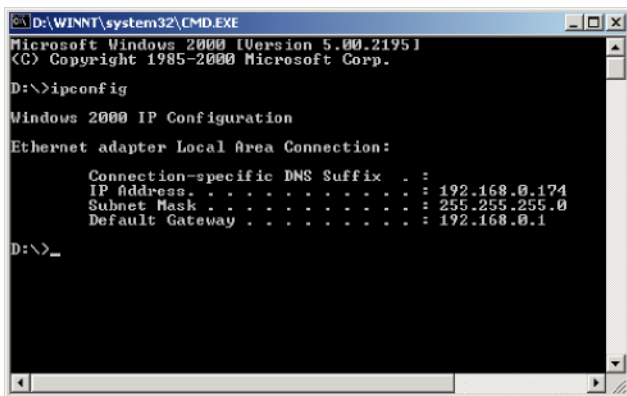

Step 4 Type **exit** to close the command prompt.

Frequently Asked Questions (continued)

Why can't I access the Web-based configuration? (continued)

Step 4 (continued) Check your IP address. Your computer must have an IP address in the same range of the device you are attempting to configure. Most D-Link devices use the 192.168.0.X range.

Make sure you take note of your computer's Default Gateway IP Address. The Default Gateway is the IP Address of the D-Link Router. By default, it should be 192.168.0.1.

How can I assign a Static IP Address in Windows XP?

Step 1

Click on **Start > Control Panel > Network and Internet Connections > Network connections.**



Step 2 See [Step 2](#) for Windows 2000 and continue from there.

How can I assign a Static IP Address in Windows 2000?

Step 1 Right-click on **My Network Places** and select **Properties.**

Step 2 Right-click on the **Local Area Connection** which represents your network card and select **Properties.**

Highlight **Internet Protocol (TCP/IP)** and click **Properties.**

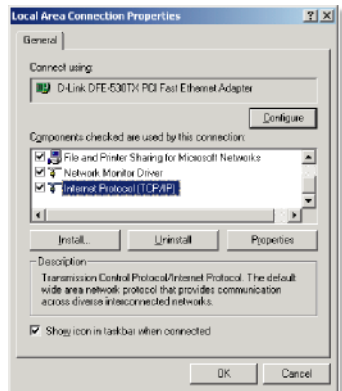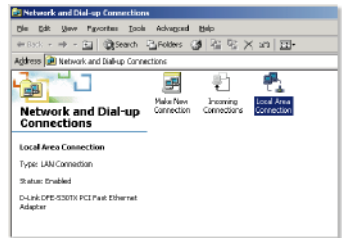

Frequently Asked Questions (continued)

Why can't I access the Web-based configuration? (continued)

How can I assign a Static IP Address in Windows 2000? (continued)

Click **Use the following IP Address** and enter an IP Address that is on the same subnet as the LAN IP address on your router. Example: If the router's LAN IP address is 192.168.0.1, make your IP address 192.168.0.X where X = 2-99. Make sure that the number you choose is not in use on the network.

Set the **Default Gateway** to be the same as the LAN IP address of your router (192.168.0.1).

Set the **Preferred DNS server** to be the same as the LAN IP address of your router (192.168.0.1).



The **Alternate DNS server** is not needed or enter a DNS server from your ISP.

Click **OK** twice. You may be asked if you want to reboot your computer. Click **Yes**.

How can I assign a Static IP Address in Windows 98/Me?

Step 1 From the desktop, right-click on the **Network Neighborhood** icon (Win ME - My Network Places) and select **Properties**

Highlight **TCP/IP** and click the **Properties** button. If you have more than one adapter, then there will be a TCP/IP "Binding" for each adapter. Highlight **TCP/IP >** (**your network adapter**) and then click **Properties**.

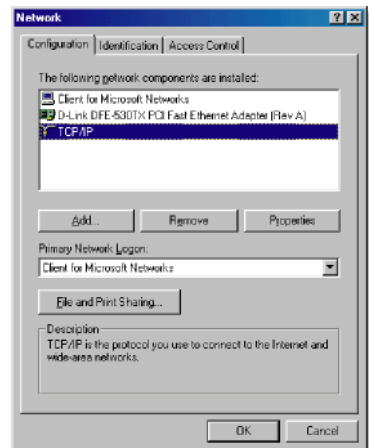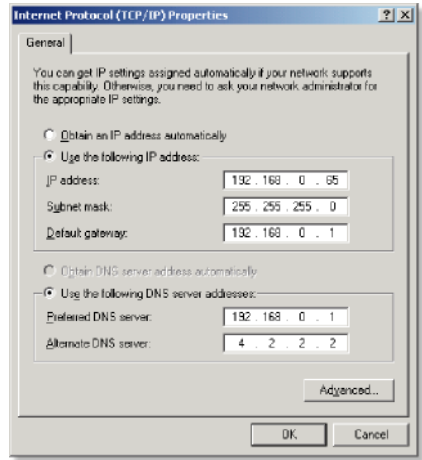

Frequently Asked Questions (continued)

Why can't I access the Web-based configuration? (continued)

How can I assign a Static IP Address in Windows 98/Me? (continued)

Step 2 Click **Specify an IP Address**.

Enter in an IP Address that is on the same subnet as the LAN IP Address on your router.

Example: If the router's LAN IP Address is 192.168.0.1, make your IP Address 192.168.0.X where X is between 2-99. Make sure that the number you choose is not in use on the network.

Step 3 Click on the **Gateway** tab.

Enter the LAN IP Address of your router here (192.168.0.1).

Click **Add** when finished.

Step 4 Click on the **DNS Configuration** tab.



Click **Enable DNS**. Type in a **Host** (can be any word). Under DNS server search order, enter the LAN IP Address of your router (192.168.0.1). Click **Add**.

Step 5 Click **OK** twice.

When prompted to reboot your computer, click **Yes**.

After you reboot, the computer will now have a static, private IP Address.

Step 5 Access the Web management. Open your Web browser and enter the IP Address of your D-Link device in the address bar. This should open the log-in page for the web management. Follow instructions to log in and complete the configuration.

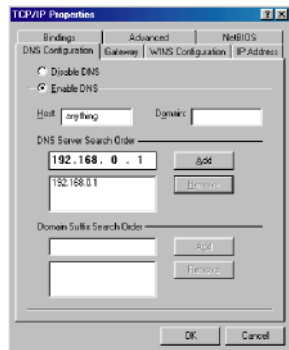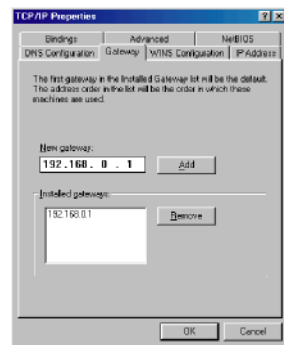

Frequently Asked Questions (continued)

How can I setup my DI-824VUP+ to work with a cable modem connection?

Dynamic Cable connection

(i.e. Cox, Adelphia, Rogers, Roadrunner, Charter, and Comcast).

Note: Please configure the router with the computer that was last connected directly to the cable modem.

Step 1 Log into the Web based configuration by typing in the IP Address of the router (default:192.168.0.1) in your web browser. The username is **admin** (all lowercase) and the password is **blank** (nothing).

Step 2 Click the **Home** tab and click the **WAN** button. Dynamic IP address is the default value, however, if Dynamic IP address is not selected as the WAN type, select Dynamic IP address by clicking on the radio button. Click **Clone Mac address**. Click on **Apply** and then **Continue** to save the changes.



D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Wizard
Wireless
WAN
LAN
DHCP
VPN

Home Advanced Tools Status Help

WAN Settings
Please select the appropriate option to connect to your ISP.

- Dynamic IP Address Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)
- Static IP Address Choose this option to set static IP information provided to you by your ISP.
- PPPoE Choose this option if your ISP uses PPPoE. (For most DSL users)
- Dial-up Network To surf the Internet via PSTN/ISDN.
- Others PPTP, L2TP and BigPond Cable.

Dynamic IP Address

Host Name (Optional)

MAC Address FF FF FF FF FF FF

Primary DNS Address 0.0.0.0

Secondary DNS Address 0.0.0.0

MTU 1500

Auto-reconnect Enabled Disabled

Auto-backup Enabled Disabled

Frequently Asked Questions (continued)

How can I setup my DI-824VUP+ to work with a cable modem connection? (continued)

Step 3 Power cycle the cable modem and router:

First turn the cable modem off. Then turn the router off. Leave them off for 2 minutes.** Next turn the cable modem on. Wait until you get a solid cable light on the cable modem, and then turn the router on. Wait 30 seconds.

** If you have a DCM-201 modem, leave off for at least 5 minutes.

Step 4 Follow step 1 again and log back into the web configuration. Click the **Status** tab and click the **Device Info** button. If you do not already have a public IP Address under the **WAN** heading, click on the **DHCP Renew** and **Continue** buttons.

Static Cable Connection

Step 1 Log into the Web-based configuration by typing in the IP address of the router (default:192.168.0.1) in your Web browser. The username is **admin** (all lowercase) and the password is blank (empty).




Step 2 Click the **Home** tab and click the **WAN** button. Select **Static IP Address** and enter your static settings obtained from the ISP in the fields provided.

If you do not know your settings, you must contact your ISP.

Step 3 Click on **Apply** and then click **Continue** to save the changes.

Step 4 Click the **Status** tab and click the **Device Info** button. Your IP Address information will be displayed under the **WAN** heading.

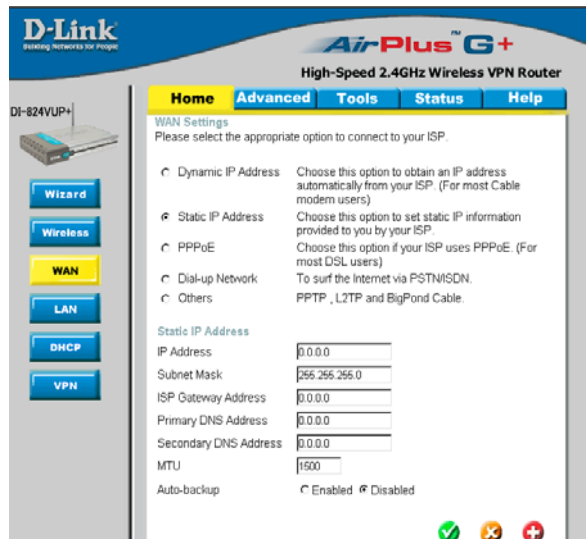

Frequently Asked Questions (continued)

How can I setup my DI-824VUP+ to work with Earthlink DSL or any PPPoE connection?

Make sure you disable or uninstall any PPPoE software such as WinPoet or Eternet 300 from your computer or you will not be able to connect to the Internet.

Step 1 Upgrade Firmware if needed.

(Please visit the D-Link tech support website at: <http://support.dlink.com> for the latest firmware upgrade information.)

Step 2 Take a paperclip and perform a hard reset. With the unit on, use a paperclip and hold down the reset button on the back of the unit for 10 seconds. Release it and the router will recycle, the lights will blink, and then stabilize.

Step 3 After the Router stabilizes, open your browser and enter 192.168.0.1 into the address window and hit the **Enter** key. When the password dialog box appears, enter the username **admin** and leave the password blank. Click **OK**.

If the password dialog box does not come up repeat **Step 2**.

Note: Do not run Wizard.

Step 4 Click on the **WAN** tab on left-hand side of the screen. Select **PPPoE**.

Step 5 Select **Dynamic PPPoE** (unless your ISP supplied you with a static IP Address).

Step 6 In the username field enter **ELN/username@earthlink.net** and your password, where username is your own username.

For SBC Global users, enter **username@sbcglobal.net**.

For Ameritech users, enter **username@ameritech.net**.

For BellSouth users, enter **username@bellsouth.net**.

For Mindspring users, enter **username@mindspring.com**.

For most other ISPs, enter **username**.

Step 7 **Maximum Idle Time** should be set to zero. Set **MTU** to 1492, unless specified by your ISP, and set **Autoreconnect** to **Enabled**.

Note: If you experience problems accessing certain websites and/or email issues, please set the MTU to a lower number such as 1472, 1452, etc. Contact your ISP for more information and the proper MTU setting for your connection.

Frequently Asked Questions (continued)

How can I setup my DI-824VUP+ to work with Earthlink DSL or any PPPoE connection? (continued)

Step 8 Click **Apply**. When prompted, click **Continue**. Once the screen refreshes, unplug the power to the D-Link Router.

Step 9 Turn off your DSL modem for 2-3 minutes. Turn back on. Once the modem has established a link to your ISP, plug the power back into the D-Link Router. Wait about 30 seconds and log back into the router.

Step 10 Click on the **Status** tab in the web configuration where you can view the device info. Under **WAN**, click **Connect**. Click **Continue** when prompted. You should now see that the device info will show an IP Address, verifying that the device has connected to a server and has been assigned an IP Address.

Can I use my DI-824VUP+ to share my Internet connection provided by AOL DSL Plus?

In most cases yes. AOL DSL Plus may use PPPoE for authentication bypassing the client software. If this is the case, then our routers will work with this service. Please contact AOL if you are not sure.

To set up your router:

Step 1 Log into the Web-based configuration (192.168.0.1) and configure the WAN side to use PPPoE.

Step 2 Enter your screen name followed by @aol.com for the user name. Enter your AOL password in the password box.

Step 3 You will have to set the MTU to 1400. AOL DSL does not allow for anything higher than 1400.

Step 4 Apply settings.

Step 5 Recycle the power to the modem for 1 minute and then recycle power to the router. Allow 1 to 2 minutes to connect.

If you connect to the Internet with a different Internet Service Provider and want to use the AOL software, you can do that without configuring the router's firewall settings. You need to configure the AOL software to connect using TCP/IP.

Go to <http://www.aol.com> for more specific configuration information of their software.

Frequently Asked Questions (continued)

I have two DI-824VUP+ Routers, how can I set them up to work with each other?

Step 1 Log into the web based configuration of the router by typing in the IP address of the router (default: 192.168.0.1) in your web browser. By default the username is **admin** and there is no password.



Connect to 192.168.0.1

DI-824VUP+


User name: admin

Password:

Remember my password

OK Cancel

Step 2 Click the **VPN** button on the left column, select the checkbox to Enable the VPN, and then in the box next to Max. number of tunnels, enter the maximum numbers of VPN tunnels that you would like to have connected.

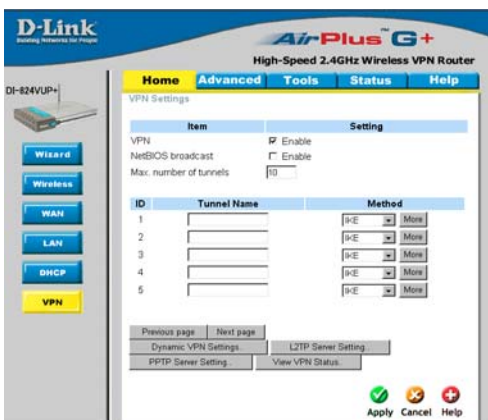

D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Home Advanced Tools Status Help

VPN Settings

Item	Setting
VPN	<input checked="" type="checkbox"/> Enable
NetBIOS broadcast	<input type="checkbox"/> Enable
Max. number of tunnels	10

ID	Tunnel Name	Method
1		IKE More
2		IKE More
3		IKE More
4		IKE More
5		IKE More


Previous page Next page

Dynamic VPN Settings L2TP Server Setting

PPTP Server Setting View VPN Status

Apply Cancel Help

Step 3 In the space provided, enter the Tunnel Name for ID number 1, select IKE, and then click More.

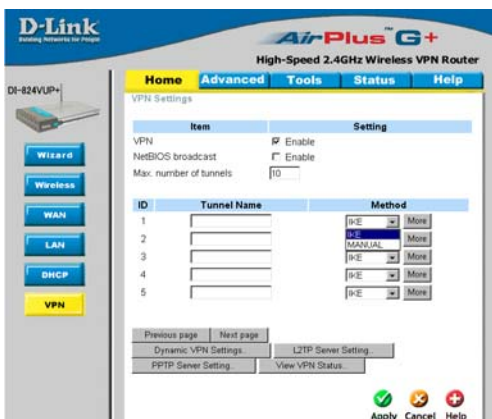

D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Home Advanced Tools Status Help

VPN Settings

Item	Setting
VPN	<input checked="" type="checkbox"/> Enable
NetBIOS broadcast	<input type="checkbox"/> Enable
Max. number of tunnels	10

ID	Tunnel Name	Method
1		IKE More
2		IKE More
3		IKE More
4		IKE More
5		IKE More

Previous page Next page

Dynamic VPN Settings L2TP Server Setting


PPTP Server Setting View VPN Status

Apply Cancel Help

Frequently Asked Questions (continued)

I have two DI-824VUP+ Routers, how can I set them up to work with each other?(continued)

Step 4 In the **Local Subnet** and **Local Netmask** fields enter the network identifier for the local DI-824VUP+’s LAN and the corresponding subnet mask.

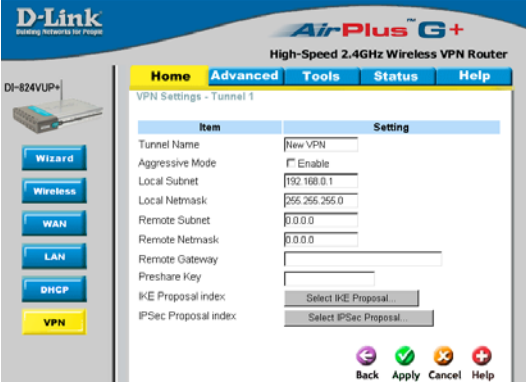


The screenshot shows the VPN Settings - Tunnel 1 configuration page for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The 'Advanced' tab is selected. The configuration table is as follows:

Item	Setting
Tunnel Name	New VPN
Aggressive Mode	<input type="checkbox"/> Enable
Local Subnet	192.168.0.1
Local Netmask	255.255.255.0
Remote Subnet	0.0.0.0
Remote Netmask	0.0.0.0
Remote Gateway	
Preshare Key	
IKE Proposal index	Select IKE Proposal...
IPSec Proposal index	Select IPSec Proposal...

Navigation buttons at the bottom: Back, Apply, Cancel, Help.

Step 5 In the **Remote Subnet** and **Remote Netmask** fields enter the network identifier for the remote DI-824VUP+’s LAN and the corresponding subnet mask.

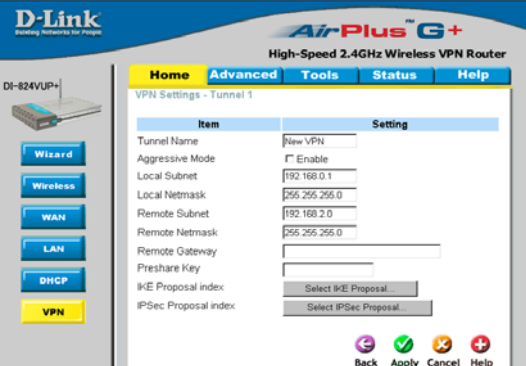


The screenshot shows the VPN Settings - Tunnel 1 configuration page for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The 'Advanced' tab is selected. The configuration table is as follows:

Item	Setting
Tunnel Name	New VPN
Aggressive Mode	<input type="checkbox"/> Enable
Local Subnet	192.168.0.1
Local Netmask	255.255.255.0
Remote Subnet	192.168.2.0
Remote Netmask	255.255.255.0
Remote Gateway	
Preshare Key	
IKE Proposal index	Select IKE Proposal...
IPSec Proposal index	Select IPSec Proposal...

Navigation buttons at the bottom: Back, Apply, Cancel, Help.

Step 6 In the **Remote Gateway** field enter the WAN IP address of the remote DI-824VUP+ and in the **Preshare Key** field, enter a key which must be exactly the same as the Preshare Key that is configured on the remote DI-824VUP+.



The screenshot shows the VPN Settings - Tunnel 1 configuration page for a D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router. The 'Advanced' tab is selected. The configuration table is as follows:

Item	Setting
Tunnel Name	New VPN
Aggressive Mode	<input type="checkbox"/> Enable
Local Subnet	192.168.0.1
Local Netmask	255.255.255.0
Remote Subnet	192.168.2.0
Remote Netmask	255.255.255.0
Remote Gateway	20.20.20.20
Preshare Key	1234567
IKE Proposal index	Select IKE Proposal...
IPSec Proposal index	Select IPSec Proposal...


Navigation buttons at the bottom: Back, Apply, Cancel, Help.

Step 7 Click Apply.


Frequently Asked Questions (continued)

I have two DI-824VUP+ Routers, how can I set them up to work with each other? (continued)


Step 8 The device will restart. Click on the Continue button.

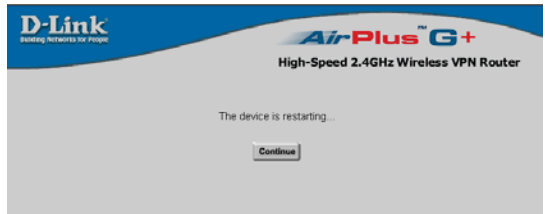

Step 9 Click on Select IKE Proposal.

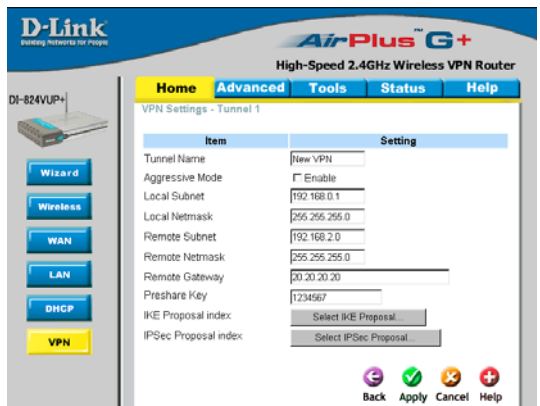

Step 10 Enter a name for proposal ID number 1 and select Group 1, 2, or 5 from the DH Group dropdown menu.

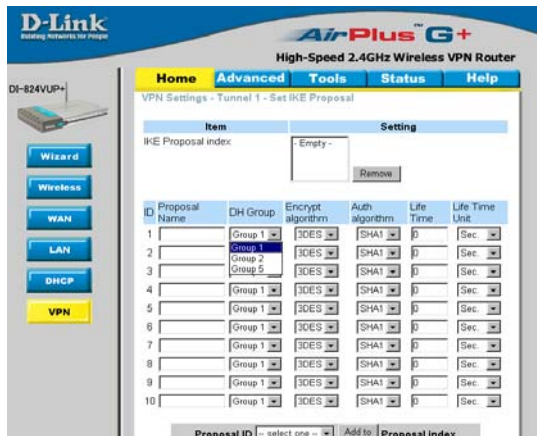

Frequently Asked Questions (continued)

I have two DI-824VUP+ Routers, how can I set them up to work with each other? (continued)

Step 11 Select DES or 3DES as the Encryption Algorithm.

The screenshot shows the 'VPN Settings - Tunnel 1 - Set IKE Proposal' page. The 'Encrypt algorithm' dropdown menu is open, and 'DES' is selected. The table below shows 10 proposals, all with 'DES' as the encryption algorithm.

ID	Proposal Name	DH Group	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1		Group 1	DES	SHA1	0	Sec.
2		Group 1	DES	SHA1	0	Sec.
3		Group 1	DES	SHA1	0	Sec.
4		Group 1	DES	SHA1	0	Sec.
5		Group 1	DES	SHA1	0	Sec.
6		Group 1	DES	SHA1	0	Sec.
7		Group 1	DES	SHA1	0	Sec.
8		Group 1	DES	SHA1	0	Sec.
9		Group 1	DES	SHA1	0	Sec.
10		Group 1	DES	SHA1	0	Sec.

Step 12 Select SHA-1 or MD5 as the Authentication Algorithm.

The screenshot shows the 'VPN Settings - Tunnel 1 - Set IKE Proposal' page. The 'Auth algorithm' dropdown menu is open, and 'MD5' is selected. The table below shows 10 proposals, all with 'MD5' as the authentication algorithm.

ID	Proposal Name	DH Group	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1		Group 1	DES	MD5	0	Sec.
2		Group 1	DES	MD5	0	Sec.
3		Group 1	DES	MD5	0	Sec.
4		Group 1	DES	MD5	0	Sec.
5		Group 1	DES	MD5	0	Sec.
6		Group 1	DES	MD5	0	Sec.
7		Group 1	DES	MD5	0	Sec.
8		Group 1	DES	MD5	0	Sec.
9		Group 1	DES	MD5	0	Sec.
10		Group 1	DES	MD5	0	Sec.

Step 13 Enter a Lifetime value of 2800 and then either select Sec. or KByte as the unit for the lifetime value.

The screenshot shows the 'VPN Settings - Tunnel 1 - Set IKE Proposal' page. The 'Life Time' field is set to 2800 and the 'Life Time Unit' dropdown menu is open, with 'Sec.' selected. The table below shows 10 proposals, all with a lifetime of 2800 seconds.

ID	Proposal Name	DH Group	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1		Group 1	DES	SHA1	2800	Sec.
2		Group 1	DES	SHA1	2800	Sec.
3		Group 1	DES	SHA1	2800	Sec.
4		Group 1	DES	SHA1	2800	Sec.
5		Group 1	DES	SHA1	2800	Sec.
6		Group 1	DES	SHA1	2800	Sec.
7		Group 1	DES	SHA1	2800	Sec.
8		Group 1	DES	SHA1	2800	Sec.
9		Group 1	DES	SHA1	2800	Sec.
10		Group 1	DES	SHA1	2800	Sec.

Frequently Asked Questions (continued)

I have two DI-808HV Routers, how can I set them up to work with each other? (continued)

Step 14 Select 1 out of the Proposal ID dropdown menu and click Add To, which will add the proposal that was just configured to the IKE Proposal Index. Click Apply.

The screenshot shows the 'VPN Settings - Tunnel 1 - Set IKE Proposal' page. On the left, there is a sidebar with navigation buttons: Wizard, Wireless, WAN, LAN, DHCP, and VPN (highlighted in yellow). The main content area has a navigation bar with Home, Advanced, Tools, Status, and Help. Below the navigation bar, there is a table with two columns: 'Item' and 'Setting'. The 'Item' column contains 'IKE Proposal index' and a 'Remove' button. The 'Setting' column contains a dropdown menu for 'IKE Proposal'. Below this, there is a table with 10 rows, each representing an IKE Proposal. The columns are: ID, Proposal Name, DH Group, Encrypt algorithm, Auth algorithm, Life Time, and Life Time Unit. The first row is selected, showing '1', 'IKE Proposal', 'Group 1', '3DES', 'SHA1', '0', and 'Kbyte'. Below the table, there is a 'Proposal ID' dropdown menu with '1' selected, an 'Add to' button, and a 'Proposal Index' label.

Step 15 The device will restart. Click on the Continue button. Then click Back.

The screenshot shows the 'High-Speed 2.4GHz Wireless VPN Router' page. The main content area displays the message 'The device is restarting...' and a 'Continue' button.

Step 16 Click on Select IPsec Proposal.

The screenshot shows the 'VPN Settings - Tunnel 1' page. On the left, there is a sidebar with navigation buttons: Wizard, Wireless, WAN, LAN, DHCP, and VPN (highlighted in yellow). The main content area has a navigation bar with Home, Advanced, Tools, Status, and Help. Below the navigation bar, there is a table with two columns: 'Item' and 'Setting'. The 'Item' column contains: Tunnel Name, Aggressive Mode, Local Subnet, Local Natmask, Remote Subnet, Remote Netmask, Remote Gateway, Preshare Key, IKE Proposal index, and IPsec Proposal index. The 'Setting' column contains: 'New VPN', 'Enable', '192.168.0.1', '255.255.255.0', '192.168.2.0', '255.255.255.0', '20.20.20.20', '1234567', 'Select IKE Proposal...', and 'Select IPsec Proposal...'. Below the table, there are four buttons: Back, Apply, Cancel, and Help.

Frequently Asked Questions (continued)

I have two DI-824VUP+ Routers, how can I set them up to work with each other?(continued)

Step 17 Enter a name for proposal ID number 1 and select Group 1, 2, 5, or None from the DH Group dropdown menu.

VPN Settings - Tunnel 1 - Set IPSEC Proposal

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	FSec Proposal	None	ESP	3DES	None	0	Sec
2		Group 1	ESP	3DES	None	0	Sec
3		Group 2	ESP	3DES	None	0	Sec
4		Group 5	ESP	3DES	None	0	Sec
5		None	ESP	3DES	None	0	Sec
6		None	ESP	3DES	None	0	Sec
7		None	ESP	3DES	None	0	Sec
8		None	ESP	3DES	None	0	Sec
9		None	ESP	3DES	None	0	Sec
10		None	ESP	3DES	None	0	Sec

Step 18 Select ESP or AH as the Encapsulation Protocol.

VPN Settings - Tunnel 1 - Set IPSEC Proposal

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	FSec Proposal	None	ESP	3DES	None	0	Sec
2		None	ESP/AH	3DES	None	0	Sec
3		None	ESP	3DES	None	0	Sec
4		None	ESP	3DES	None	0	Sec
5		None	ESP	3DES	None	0	Sec
6		None	ESP	3DES	None	0	Sec
7		None	ESP	3DES	None	0	Sec
8		None	ESP	3DES	None	0	Sec
9		None	ESP	3DES	None	0	Sec
10		None	ESP	3DES	None	0	Sec

Step 19 Select DES or 3DES as the Encryption Algorithm.


VPN Settings - Tunnel 1 - Set IPSEC Proposal

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	FSec Proposal	None	ESP	3DES	None	0	Sec
2		None	ESP	DES	None	0	Sec
3		None	ESP	DES	None	0	Sec
4		None	ESP	3DES	None	0	Sec
5		None	ESP	3DES	None	0	Sec
6		None	ESP	3DES	None	0	Sec
7		None	ESP	3DES	None	0	Sec
8		None	ESP	3DES	None	0	Sec
9		None	ESP	3DES	None	0	Sec
10		None	ESP	3DES	None	0	Sec

Frequently Asked Questions (continued)

I have two DI-824VUP+ Routers, how can I set them up to work with each other? (continued)


Step 20 Select SHA-1, MD5, or None as the Authentication Algorithm.

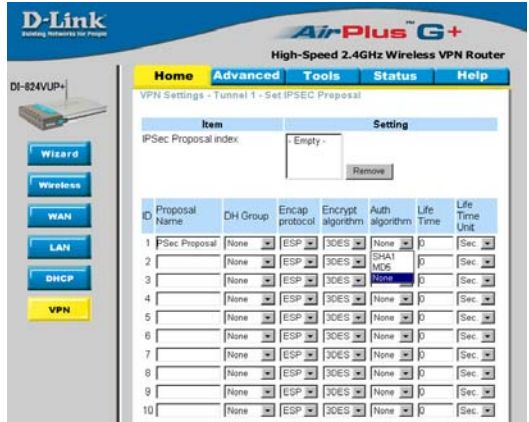

Step 21 Enter a Lifetime value and then either select Sec. or KB as the unit for the lifetime value.



Step 22 Select 1 out of the Proposal ID dropdown menu and click Add To, which will add the proposal that was just configured to the IPSEC Proposal Index. Click Apply and the device will restart.

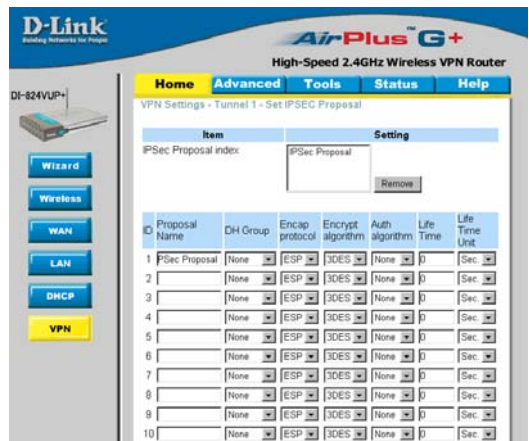

Frequently Asked Questions (continued)

I have two DI-824VUP+ Routers, how can I set them up to work with each other? (continued)

Step 23 Follow these instructions to configure your other DI-824VUP+ using the exact same settings for the IKE Proposal and the IPSec Proposal. Also make sure that Step 4 is configured to reflect the LAN settings for what is now the Local DI-824VUP+ and that Steps 5 & 6 are configured to reflect the Subnet and WAN IP of what is now the remote DI-824VUP+.

Step 24 To establish the connection, open a command prompt and ping an IP address of a computer on the remote LAN. Once you receive replies the tunnel has been established.

How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV Router?

You need to first configure your DI-824VUP+ router.

Step 1 Log into the Web-based configuration of the router by typing in the IP address of the router (default: 192.168.0.1) in your web browser. By default the username is “admin” and there is no password.



The screenshot shows a web browser dialog box titled "Connect to 192.168.0.1". The dialog has a blue header with a question mark icon and a close button. Below the header is a yellow background area with a key icon. The text "DI-824VUP+" is displayed. There are two input fields: "User name:" with a dropdown menu showing "admin" and a "Password:" field. Below the password field is a checkbox labeled "Remember my password". At the bottom of the dialog are "OK" and "Cancel" buttons.

Step 2 Click the VPN button on the left column, select the checkbox to Enable the VPN, and then in the box next to Max. number of tunnels, enter the maximum numbers of VPN tunnels that you would like to have connected.

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV Router? (continued)

Step 3 In the space provided, enter the Tunnel Name for ID number 1, select IKE, and then click More.

D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router

Home Advanced Tools Status Help

VPN Settings

Item	Setting
VPN	<input checked="" type="checkbox"/> Enable
NetBIOS broadcast	<input type="checkbox"/> Enable
Max. number of tunnels	10

ID	Tunnel Name	Method
1	New VPN	IKE More
2		MANUAL More
3		IKE More
4		IKE More
5		IKE More

Previous page Next page

Dynamic VPN Settings L2TP Server Setting

PPTP Server Setting... View VPN Status

Apply Cancel Help

Step 4 In the **Local Subnet** and **Local Netmask** fields enter the network identifier for DI-824VUP+'s LAN and the corresponding subnet mask.

D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router

Home Advanced Tools Status Help

VPN Settings - Tunnel 1

Item	Setting
Tunnel Name	New VPN
Aggressive Mode	<input checked="" type="checkbox"/> Enable
Local Subnet	192.168.0.0
Local Netmask	256.25.256.0
Remote Subnet	0.0.0.0
Remote Netmask	0.0.0.0
Remote Gateway	
Preshare Key	
IKE Proposal index	Select IKE Proposal
IPSec Proposal index	Select IPSec Proposal

Back Apply Cancel Help

Step 5 In the **Remote Subnet** and **Remote Netmask** fields enter the network identifier for the DI-804V or DI-804HV's LAN and the corresponding subnet mask. Click Apply.

D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router

Home Advanced Tools Status Help

VPN Settings - Tunnel 1

Item	Setting
Tunnel Name	New VPN
Aggressive Mode	<input checked="" type="checkbox"/> Enable
Local Subnet	192.168.0.0
Local Netmask	256.25.256.0
Remote Subnet	192.168.2.0
Remote Netmask	256.25.256.0
Remote Gateway	
Preshare Key	
IKE Proposal index	Select IKE Proposal
IPSec Proposal index	Select IPSec Proposal

Back Apply Cancel Help

Frequently Asked Questions (continued)


How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV Router? (continued)

Step 6 The device will restart. Click on the Continue button.



Step 7 In the **Remote Gateway** field enter the WAN IP address of the remote DI-804V or DI-804HV and in the **Preshare Key** field, enter a key which must be exactly the same as the Preshare Key that is configured on the DI-804V or DI-804HV.


Step 8 Click Apply and then click on Select IKE Proposal.

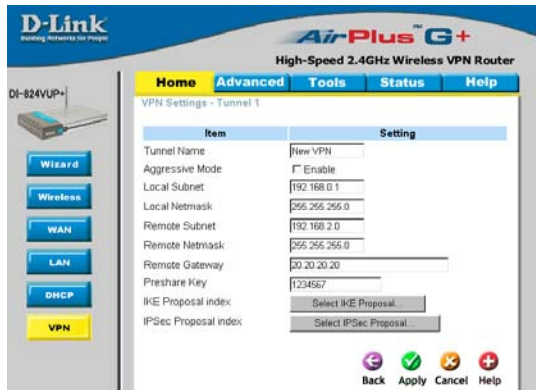

Step 9 Enter a name for proposal ID number 1 and select Group 2 from the DH Group drop down menu.

Step 10 Select 3DES as the Encryption Algorithm and SHA-1 as the Authentication Algorithm.

Step 11 Enter a Lifetime value of 28800 and then select Sec. as the unit for the lifetime value.

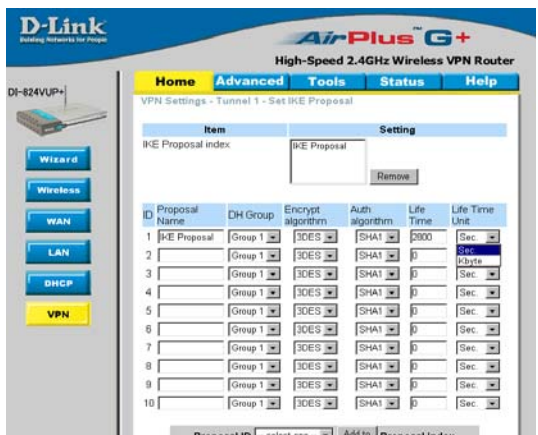

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV Router? (continued)

Step 12 Select 1 out of the Proposal ID dropdown menu and click Add To, which will add the proposal that was just configured to the IKE Proposal Index. Click Apply.

The screenshot shows the 'VPN Settings - Tunnel 1 - Set IKE Proposal' page. On the left, there is a sidebar with navigation buttons: Wizard, Wireless, WAN, LAN, DHCP, and VPN. The main content area has tabs for Home, Advanced, Tools, Status, and Help. Below the tabs, there is a section for 'IKE Proposal index' with a dropdown menu and a 'Remove' button. A table lists 10 IKE Proposals, all with 'Group 1' as the DH Group and 'SHA1' as the Auth algorithm. At the bottom, there is a 'Proposal ID' dropdown menu and an 'Add to' button.

Step 13 The device will restart. Click on the Continue button.

The screenshot shows the 'VPN Settings - Tunnel 1 - Set IKE Proposal' page with a message that says 'The device is restarting...'. Below the message is a 'Continue' button.

Step 14 Click Back and click on Select IPsec Proposal.

Step 15 Enter a name for proposal ID number 1 and select None from the DH Group drop-down menu.

Step 16 Select ESP as the Encapsulation Protocol.

The screenshot shows the 'VPN Settings - Tunnel 1 - Set IPSEC Proposal' page. On the left, there is a sidebar with navigation buttons: Wizard, Wireless, WAN, LAN, DHCP, and VPN. The main content area has tabs for Home, Advanced, Tools, Status, and Help. Below the tabs, there is a section for 'IPSec Proposal index' with a dropdown menu and a 'Remove' button. A table lists 10 IPsec Proposals. The first row is selected, and its 'Encap protocol' is set to 'ESP'. At the bottom, there is a 'Proposal ID' dropdown menu and an 'Add to' button.

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV Router? (continued)

Step 17 Select 3DES as the Encryption Algorithm and MD5 as the Authentication Algorithm. Click Apply.

VPN Settings - Tunnel 1 - Set IPSEC Proposal

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	IPSec Proposal	None	ESP	3DES	MD5	0	Sec
2		None	ESP	DES	None	0	Sec
3		None	ESP	DES	None	0	Sec
4		None	ESP	DES	None	0	Sec
5		None	ESP	DES	None	0	Sec
6		None	ESP	DES	None	0	Sec
7		None	ESP	DES	None	0	Sec
8		None	ESP	DES	None	0	Sec
9		None	ESP	DES	None	0	Sec
10		None	ESP	DES	None	0	Sec

Step 18 Enter a Lifetime value of 3600 and then select Sec. as the unit for the lifetime value.

VPN Settings - Tunnel 1 - Set IPSEC Proposal

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	IPSec Proposal	None	ESP	DES	None	3600	Sec
2		None	ESP	DES	None	0	Sec
3		None	ESP	DES	None	0	Sec
4		None	ESP	DES	None	0	Sec
5		None	ESP	DES	None	0	Sec
6		None	ESP	DES	None	0	Sec
7		None	ESP	DES	None	0	Sec
8		None	ESP	DES	None	0	Sec
9		None	ESP	DES	None	0	Sec
10		None	ESP	DES	None	0	Sec

Step 19 Select 1 out of the Proposal ID dropdown menu and click Add To, which will add the proposal that was just configured to the IPSec Proposal Index. Click Apply. The device will restart. Click on the Continue button.

VPN Settings - Tunnel 1 - Set IPSEC Proposal

ID	Proposal Name	DH Group	Encap protocol	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	IPSec Proposal	None	ESP	DES	None	3600	Sec
2		None	ESP	DES	None	0	Sec
3		None	ESP	DES	None	0	Sec
4		None	ESP	DES	None	0	Sec
5		None	ESP	DES	None	0	Sec
6		None	ESP	DES	None	0	Sec
7		None	ESP	DES	None	0	Sec
8		None	ESP	DES	None	0	Sec
9		None	ESP	DES	None	0	Sec
10		None	ESP	DES	None	0	Sec

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV Router? (continued)

Next you need to configure the DI-804V or DI-804HV Router.

Step 1 Access the router's web configuration by entering the router's IP address in your web browser. The default IP address is 192.168.0.1. Login using your password. The default username is "admin" and the password is blank.

Step 2 Click on Basic Setup and then select Device IP Settings on the left.

Step 3 Change the LAN IP address so that it is on a different subnet than the LAN of the DI-824VUP+.

Step 4 Click Next until you reach the Save & Restart screen. Click Save & restart and then click Basic Setup once until the unit has rebooted.

Step 5 Click on VPN Settings.

The screenshot shows the D-Link VPN Router DI-804V web interface. The top navigation bar includes tabs for DEVICE INFORMATION, DEVICE STATUS, BASIC SETUP (highlighted), ADVANCED SETTINGS, SYSTEM TOOLS, and HELP. On the left, a 'Main menu' sidebar lists various settings categories, with 'DEVICE IP SETTINGS' highlighted. The main content area is titled 'DEVICE LAN IP SETTINGS' and contains the following text: 'The device LAN IP address and subnet Mask settings'. Below this, there are two rows of input fields: 'IP Address' with values 192, 168, 1, 1 and 'IP Subnet Mask' with values 255, 255, 255, 0. At the bottom right of the form are '< BACK' and 'NEXT >' buttons. A note at the bottom of the page reads: 'NOTE: Please click "Next" to accept the settings.' The footer indicates 'Copyright © 2000'.

Step 6 Name your VPN connection and click ADD.

Step 7 In Remote IP Network and Remote IP Netmask fields enter the network identifier and corresponding subnet mask of the DI-824VUP+ 's LAN.

Step 8 In the Remote Gateway IP field enter the WAN IP address of the DI-824VUP+ and make sure that the Network Interface is set to WAN Ethernet.

Step 9 Verify that Secure Association is set to IKE and that Perfect Forward Secure is Disabled.

The screenshot shows the D-Link VPN Router DI-804V web interface. The top navigation bar includes tabs for DEVICE INFORMATION, DEVICE STATUS, BASIC SETUP (highlighted), ADVANCED SETTINGS, SYSTEM TOOLS, and HELP. On the left, a 'Main menu' sidebar lists various settings categories, with 'VPN SETTINGS' highlighted. The main content area is titled 'VPN SETTINGS' and contains a 'Connection Name' field with the value 'NewVPN' and an 'ADD' button. Below this is a table with the following structure:

Enable	Connection Name	Local IPSEC ID	Remote IPSEC ID	Command
<input type="checkbox"/>				

At the bottom right of the form are '< BACK' and 'NEXT >' buttons. The footer indicates 'Copyright © 2000'.

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV Router? (continued)

Step 10 Verify the Encryption Protocol is set to 3DES and enter in your Preshared Key.

Note: The Preshared Key needs to be identical to the one configured on the DI-824VUP+.

Step 11 Leave the Key Life and IKE Life Time values at their default levels and click SAVE.

D-Link VPN Router DI-804V

DEVICES INFORMATION DEVICES STATUS BASIC SETUP ADVANCED SETTINGS SYSTEM TOOLS HELP

Main menu

VPN SETTINGS

Connection Name: NewVPN

Local IPSEC Identifier: Local

Remote IPSEC Identifier: Remote

Remote IP Network: 192.168.0.0

Remote IP Netmask: 255.255.255.0

Remote Gateway IP: 10.10.10.10

Network Interface: WAN ETHERNET

Secure Association: IKE Manual

Perfect Forward Secure: Enabled Disabled

Encryption Protocol: 3DES

PreShared Key: 132456

Key Life: 3600 Seconds

IKE Life Time: 28800 Seconds

SAVE

Step 12 Click Next and then click on Save & Restart.

SAVE & RESTART

After you have configured both routers, you need to establish a connection.

Step 1 Open a command prompt and from a computer on the internal LAN of the DI-824VUP+ and ping the IP address of a computer that is on the internal LAN of the DI-804V or DI-804HV, or vice versa.

```
D:\>ipconfig
Windows 2000 IP Configuration

Ethernet adapter Local Area Connection 10:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 192.168.1.2
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.1.1

D:\>ping 192.168.0.100

Pinging 192.168.0.100 with 32 bytes of data:

Reply from 192.168.0.100: bytes=32 time=10ms TTL=126
Reply from 192.168.0.100: bytes=32 time<10ms TTL=126
Reply from 192.168.0.100: bytes=32 time<10ms TTL=126
Reply from 192.168.0.100: bytes=32 time<10ms TTL=126

Ping statistics for 192.168.0.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms
```

Step 2 Once you begin to receive replies, the VPN connection has been established.


Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DI-804V or DI-804HV router? (continued)

Step 3 To view the Status of the VPN on the DI-804V or DI-804HV, click on Device Status.

Step 4 From the Device Status screen click on VPN Status.

Step 5 When the VPN has been established the Status will be Active.

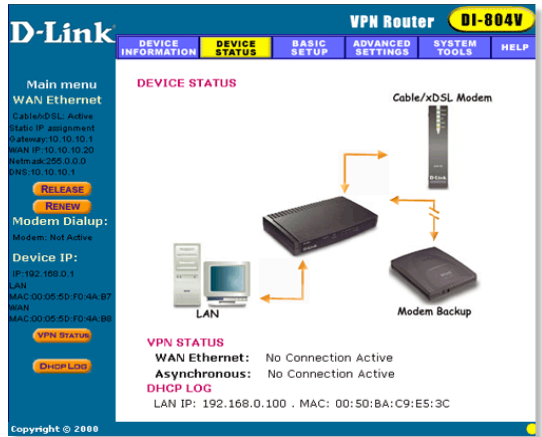

How can I set up my DI-824VUP+ to work with a DFL-300 Firewall?

You need to first configure your DI-824VUP+ router.


Step 1 Log into the web based configuration of the router by typing in the IP address of the router (default: 192.168.0.1) in your web browser. By default the username is “admin” and there is no password.

Step 2 Click the VPN button on the left column, select the checkbox to Enable the VPN, and then in the box next to Max. number of tunnels, enter the maximum numbers of VPN tunnels that you would like to have connected.

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DFL-300 Firewall? (continued)

Step 3 In the space provided, enter the Tunnel Name for ID number 1, select IKE, and then click More.

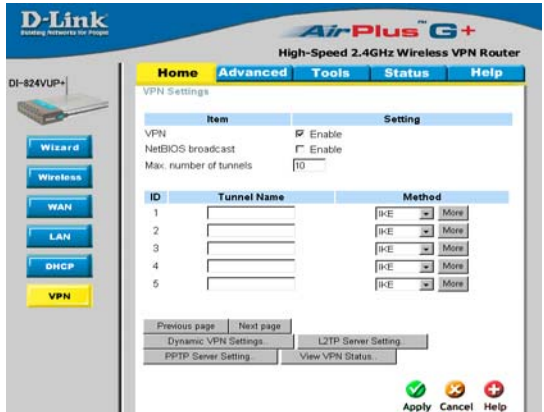

DI-824VUP+ High-Speed 2.4GHz Wireless VPN Router

Home Advanced Tools Status Help

VPN Settings

Item	Setting
VPN	<input checked="" type="checkbox"/> Enable
NetBIOS broadcast	<input type="checkbox"/> Enable
Max. number of tunnels	10

ID	Tunnel Name	Method
1		IKE More
2		IKE More
3		IKE More
4		IKE More
5		IKE More


Previous page Next page

Dynamic VPN Settings L2TP Server Setting

PPTP Server Setting View VPN Status

Apply Cancel Help

Step 4 In the **Local Subnet** and **Local Netmask** fields enter the network identifier for DI-824VUP+ 's LAN and the corresponding subnet mask.



DI-824VUP+ High-Speed 2.4GHz Wireless VPN Router

Home Advanced Tools Status Help

VPN Settings - Tunnel 1

Item	Setting
Tunnel Name	New VPN
Aggressive Mode	<input type="checkbox"/> Enable
Local Subnet	192.168.0.1
Local Netmask	255.255.255.0
Remote Subnet	0.0.0.0
Remote Netmask	0.0.0.0
Remote Gateway	
Preshare Key	
IKE Proposal index	Select IKE Proposal
IPSec Proposal index	Select IPSec Proposal

Back Apply Cancel Help

Step 5 In the **Remote Subnet** and **Remote Netmask** fields enter the network identifier for the DFL-300's Internal interface and the corresponding subnet mask.



DI-824VUP+ High-Speed 2.4GHz Wireless VPN Router

Home Advanced Tools Status Help

VPN Settings - Tunnel 1

Item	Setting
Tunnel Name	New VPN
Aggressive Mode	<input type="checkbox"/> Enable
Local Subnet	192.168.0.1
Local Netmask	255.255.255.0
Remote Subnet	192.168.2.0
Remote Netmask	255.255.255.0
Remote Gateway	
Preshare Key	
IKE Proposal index	Select IKE Proposal
IPSec Proposal index	Select IPSec Proposal

Back Apply Cancel Help

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DFL-300 Firewall? (continued)

Step 6 In the Remote Gateway field enter the WAN IP address of the remote DFL-300 and in the Preshared Key field, enter a key which must be exactly the same as the Preshared Key that is configured on the DFL-300.


Step 7 Click Apply. The device will restart. Click on the Continue button and then click on Select IKE Proposal.



Step 8 Enter a name for proposal ID number 1 and select Group 2 from the DH Group dropdown menu.

Step 9 Select 3DES as the Encryption Algorithm and SHA-1 as the Authentication Algorithm.

Step 10 Enter a Lifetime value of 28800 and then select Sec. as the unit for the lifetime value.

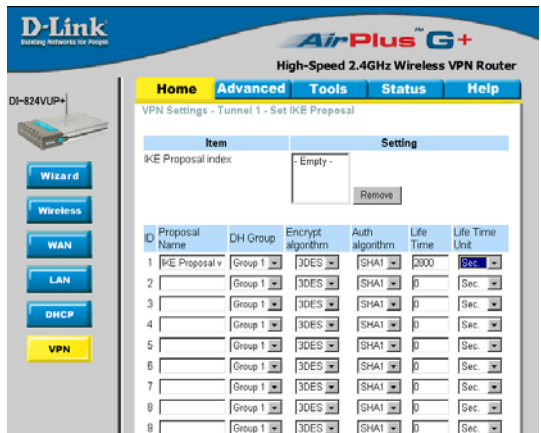


Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DFL-300 Firewall? (continued)

Step 11 Select 1 out of the Proposal ID dropdown menu and click Add To, which will add the proposal that was just configured to the IKE Proposal Index. Click Apply. The device will restart. Click on the Continue button and then click Back.

Step 12 Click on Select IPsec Proposal.

Step 13 Enter a name for proposal ID number 1 and select None from the DH Group dropdown menu.

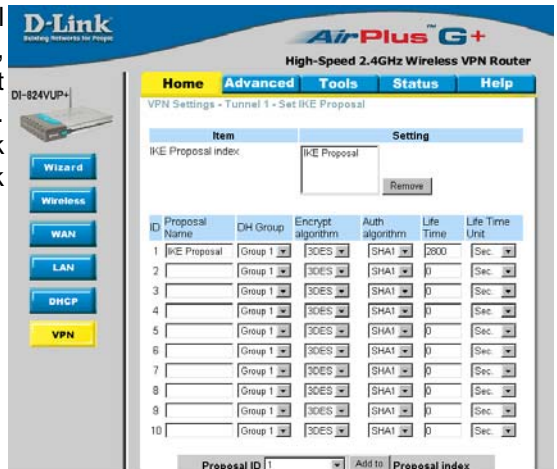


The screenshot shows the VPN Settings - Tunnel 1 - Set IKE Proposal page. On the left is a navigation menu with buttons for Wizard, Wireless, WAN, LAN, DHCP, and VPN. The main area contains a table for the IKE Proposal Index. The table has columns for ID, Proposal Name, DH Group, Encrypt algorithm, Auth algorithm, Life Time, and Life Time Unit. Row 1 is selected and has 'Ike Proposal' in the Proposal Name field. Below the table, there is a 'Proposal ID' dropdown menu set to '1' and an 'Add to Proposal index' button.

ID	Proposal Name	DH Group	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	Ike Proposal	Group 1	3DES	SHA1	2800	Sec.
2		Group 1	3DES	SHA1	0	Sec.
3		Group 1	3DES	SHA1	0	Sec.
4		Group 1	3DES	SHA1	0	Sec.
5		Group 1	3DES	SHA1	0	Sec.
6		Group 1	3DES	SHA1	0	Sec.
7		Group 1	3DES	SHA1	0	Sec.
8		Group 1	3DES	SHA1	0	Sec.
9		Group 1	3DES	SHA1	0	Sec.
10		Group 1	3DES	SHA1	0	Sec.

Step 14 Select ESP as the Encapsulation Protocol.

Step 15 Select 3DES as the Encryption Algorithm and MD5 as the Authentication Algorithm.

Step 16 Enter a Lifetime value of 28800 and then select Sec. as the lifetime value.

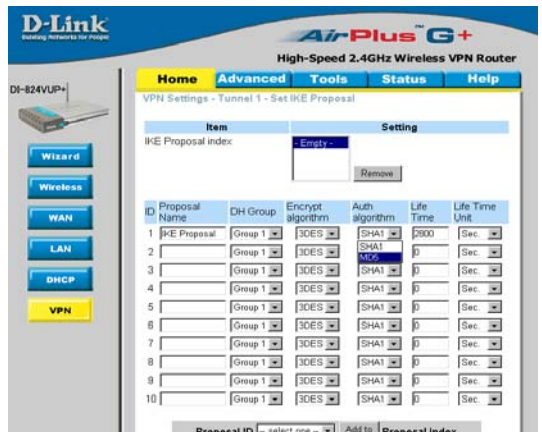


The screenshot shows the same VPN Settings - Tunnel 1 - Set IKE Proposal page. In the IKE Proposal Index table, row 1 now has 'Ike Proposal' in the Proposal Name field, 'Group 1' in the DH Group field, '3DES' in the Encrypt algorithm field, 'SHA1' in the Auth algorithm field, '28800' in the Life Time field, and 'Sec.' in the Life Time Unit field. The 'Add to Proposal index' button is still present at the bottom.

ID	Proposal Name	DH Group	Encrypt algorithm	Auth algorithm	Life Time	Life Time Unit
1	Ike Proposal	Group 1	3DES	SHA1	28800	Sec.
2		Group 1	3DES	SHA1	0	Sec.
3		Group 1	3DES	SHA1	0	Sec.
4		Group 1	3DES	SHA1	0	Sec.
5		Group 1	3DES	SHA1	0	Sec.
6		Group 1	3DES	SHA1	0	Sec.
7		Group 1	3DES	SHA1	0	Sec.
8		Group 1	3DES	SHA1	0	Sec.
9		Group 1	3DES	SHA1	0	Sec.
10		Group 1	3DES	SHA1	0	Sec.

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DFL-300 Firewall? (continued)

Step 17 Select 1 out of the Proposal ID dropdown menu and click Add To, which will add the proposal that was just configured to the IPsec Proposal Index. Click Apply and then click Restart.

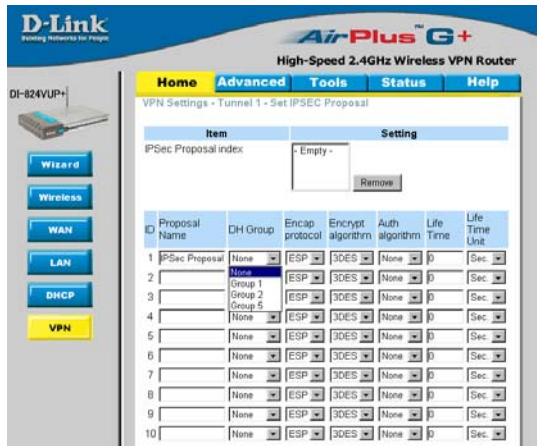

Step 18 The device will restart. Click on the Continue button.




Next you need to configure the DFL-300 firewall.

Step 1 Access the configuration screen of the DFL-300 by opening a web browser such as Internet Explorer and type the IP address of the DFL-300 in the address bar (192.168.1.1).

Step 2 Enter the username (admin) and the password (admin). Click OK.


Step 3 Click on Configuration and take note of the IP address that your ISP has assigned you.

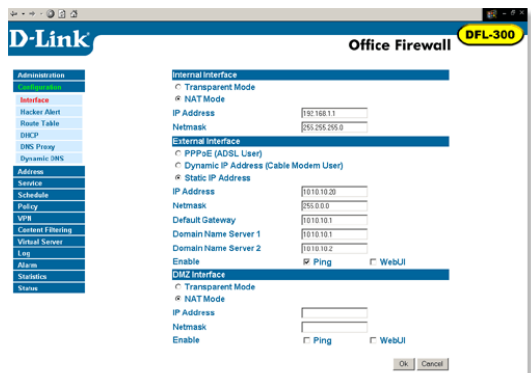


Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DFL-300 Firewall? (continued)

Step 4 Click on Policy and verify that you have an Outgoing policy configured. If not, click on New Entry, accept the default values, and click OK.

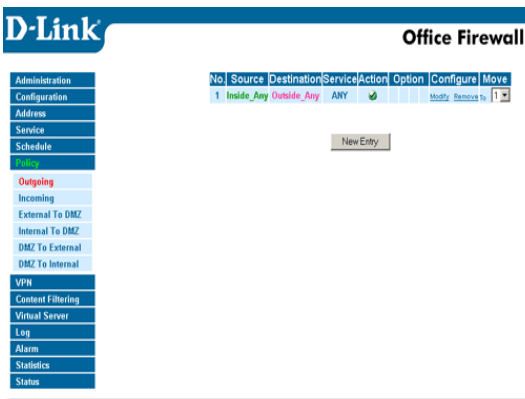

Step 5 Click on VPN and then click New Entry.

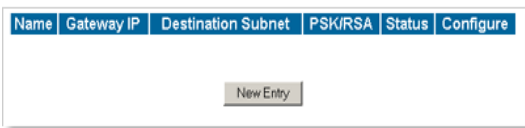

Step 6 Give the VPN connection a name with no spaces.

Step 7 Enter the network identifier and subnet mask of the Internal interface.

Step 8 In the To Destination section, select either Remote Gateway—Fixed IP or Remote Gateway—Dynamic IP. Enter the WAN IP address of the DI-824VUP+ if Remote Gateway—Fixed IP is selected.


Step 9 Enter the network identifier corresponding subnet mask of the DI-824VUP+’s LAN.

Step 10 Enter a Preshared Key. The Preshared Key needs to be identical to the one configured on the DI-824VUP+.

Step 11 Select Data Encryption and Authentication as the Encapsulation and click OK.

Frequently Asked Questions (continued)

How can I set up my DI-824VUP+ to work with a DFL-300 Firewall?
(continued)

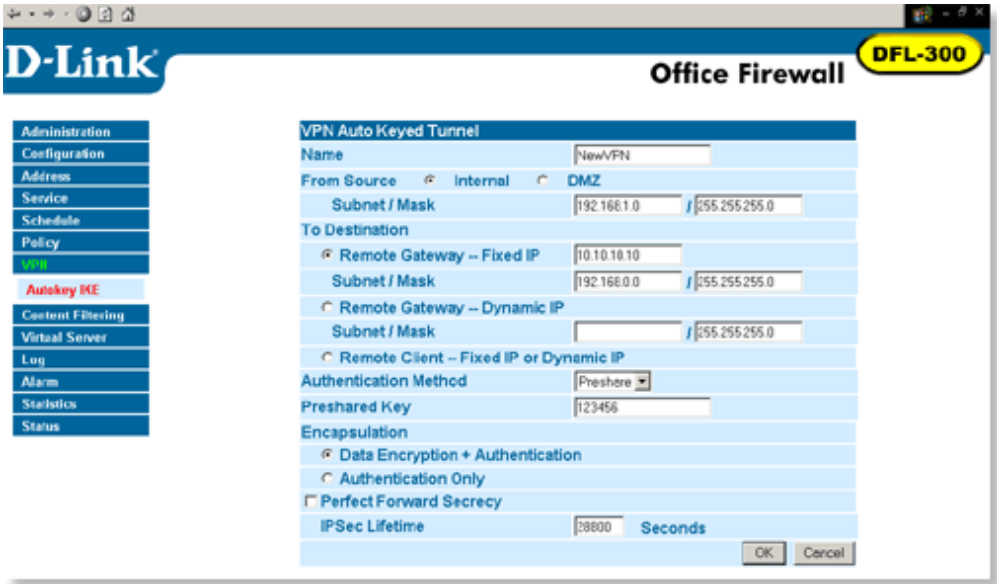

After you have configured both the router and firewall, you need to establish a connection.

Step 1 Open a command prompt and from a computer connected to the Internal interface of the DFL-300 and ping the IP address of a computer that is on the internal LAN of the DI-824VUP+, or vice versa.

```
D:\>ipconfig

Windows 2000 IP Configuration

Ethernet adapter Local Area Connection 10:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 192.168.1.2
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.1.1

D:\>ping 192.168.0.100

Pinging 192.168.0.100 with 32 bytes of data:

Reply from 192.168.0.100: bytes=32 time<10ms TTL=126
Reply from 192.168.0.100: bytes=32 time<10ms TTL=126
Reply from 192.168.0.100: bytes=32 time<10ms TTL=126
Reply from 192.168.0.100: bytes=32 time<10ms TTL=126

Ping statistics for 192.168.0.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 10ms, Average = 2ms
```

Step 2 Once you begin to receive replies, the VPN connection has been established.

Frequently Asked Questions (continued)

How do I open ports on my DI-824VUP+?

To allow traffic from the internet to enter your local network, you will need to open up ports or the router will block the request.

Step 1 Open your Web browser and enter the IP Address of your D-Link router (192.168.0.1). Enter username (admin) and your password (blank by default).

Step 2 Click on **Advanced** on top and then click **Virtual Server** on the left side.

Step 3 Check **Enabled** to activate entry.

Step 4 Enter a name for your virtual server entry.

Step 5 Next to **Private IP**, enter the IP Address of the computer on your local network that you want to allow the incoming service to.

Step 6 Choose **Protocol Type** - either TCP, UDP, or both. If you are not sure, select both.


Step 7 Enter the port information next to **Private Port** and **Public Port**. The private and public ports are usually the same. The public port is the port seen from the WAN side, and the private port is the port being used by the application on the computer within your local network.

Step 8 Enter the **Schedule** information.

Step 9 Click **Apply** and then click **Continue**.

Note: Make sure DMZ host is disabled. If DMZ is enabled, it will disable all Virtual Server entries.

Because our routers use NAT (Network Address Translation), you can only open a specific port to one computer at a time. For example: If you have 2 web servers on your network, you cannot open port 80 to both computers. You will need to configure 1 of the web servers to use port 81. Now you can open port 80 to the first computer and then open port 81 to the other computer.

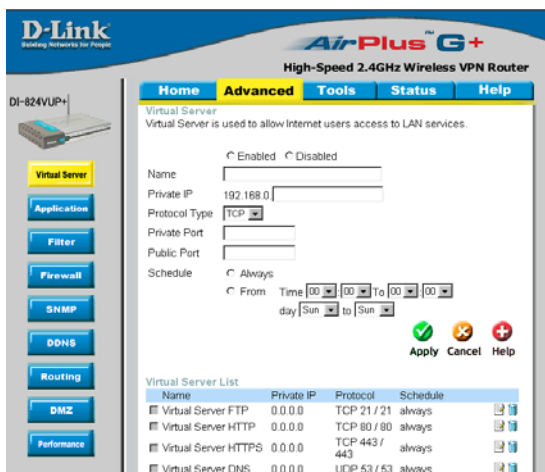

Frequently Asked Questions (continued)

What is DMZ?

Demilitarized Zone:

In computer networks, a DMZ (demilitarized zone) is a computer host or small network inserted as a neutral zone between a company's private network and the outside public network. It prevents outside users from getting direct access to a server that has company data. (The term comes from the geographic buffer zone that was set up between North Korea and South Korea following the UN police action in the early 1950s.) A DMZ is an optional and more secure approach to a firewall and effectively acts as a proxy server as well.

In a typical DMZ configuration for a small company, a separate computer (or host in network terms) receives requests from users within the private network for access to Web sites or other companies accessible on the public network. The DMZ host then initiates sessions for these requests on the public network. However, the DMZ host is not able to initiate a session back into the private network. It can only forward packets that have already been requested.

Users of the public network outside the company can access only the DMZ host. The DMZ may typically also have the company's Web pages so these could be served to the outside world. However, the DMZ provides access to no other company data. In the event that an outside user penetrated the DMZ hosts security, the Web pages might be corrupted but no other company information would be exposed. D-Link, a leading maker of routers, is one company that sells products designed for setting up a DMZ.

How do I configure the DMZ Host?

The DMZ feature allows you to forward all incoming ports to one computer on the local network. The DMZ, or Demilitarized Zone, will allow the specified computer to be exposed to the Internet. DMZ is useful when a certain application or game does not work through the firewall. The computer that is configured for DMZ will be completely vulnerable on the Internet, so it is suggested that you try opening ports from the Virtual Server or Firewall settings before using DMZ.

Step 1 Find the IP address of the computer you want to use as the DMZ host.

To find out how to locate the IP Address of the computer in Windows XP/2000/ME/9x or Macintosh operating systems please refer to Step 4 of the first question in this section (Frequently Asked Questions).

Frequently Asked Questions (continued)

How do I configure the DMZ Host? (continued)


Step 2 Log into the web based configuration of the router by typing in the IP Address of the router (default:192.168.0.1) in your web browser. The username is **admin** (all lowercase) and the password is blank (empty).



Step 3 Click the **Advanced** tab and then click on the **DMZ** button. Select **Enable** and type in the IP Address from step 1.

Step 4 Click **Apply** and then **Continue** to save the changes.

Note: When DMZ is enabled, Virtual Server settings will still be effective. Remember, you cannot forward the same port to multiple IP Addresses, so the Virtual Server settings will take priority over DMZ settings.

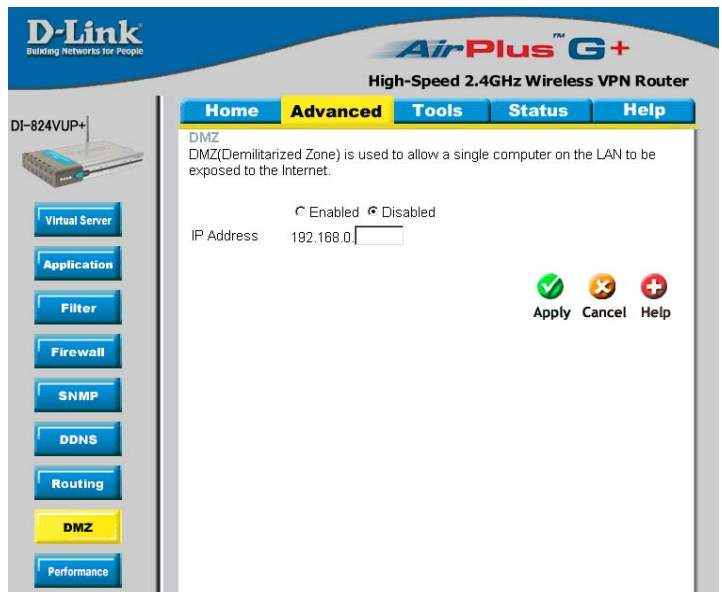

Frequently Asked Questions (continued)

How do I open a range of ports on my DI-824VUP+ using Firewall rules?

Step 1 Access the router's web configuration by entering the router's IP Address in your web browser. The default IP Address is **192.168.0.1**. Login using your password. The default username is "**admin**" and the password is blank.

If you are having difficulty accessing web management, please see the first question in this section.

Step 2 From the web management Home page, click the **Advanced** tab then click the **Firewall** button.

Step 3 Click on **Enabled** and type in a name for the new rule.

Step 4 Choose **WAN** as the **Source** and enter a range of IP Addresses out on the internet that you would like this rule applied to. If you would like this rule to allow all internet users to be able to access these ports, then put an **Asterisk** in the first box and leave the second box empty.

The screenshot shows the D-Link DI-824VUP+ web configuration interface. The page title is "AirPlus G+ High-Speed 2.4GHz Wireless VPN Router". The "Advanced" tab is selected, and the "Firewall" button is highlighted in the left sidebar. The "Firewall Rules" section is active, showing a form to configure a new rule. The "Name" field is empty. The "Action" is set to "Allow". The "Source" is set to "WAN" with an asterisk in the first box. The "Destination" is set to "LAN". The "Schedule" is set to "Always". The "Apply" button is highlighted in green.

Firewall Rules List

Action Name	Source	Destination	Protocol	
<input type="checkbox"/> Allow	Allow to Ping WAN port	WAN,*	LAN,192.168.0.1 ICMP,*	
<input type="checkbox"/> Deny	Default	*,*	LAN, 192.168.0.1	
<input type="checkbox"/> Allow	Default	LAN,*	*,192.168.0.1	

Step 5 Select **LAN** as the **Destination** and enter the IP Address of the computer on your local network that you want to allow the incoming service to. This will not work with a range of IP Addresses.

Step 6 Enter the port or range of ports that are required to be open for the incoming service.

Step 7 Click **Apply** and then click **Continue**.

Note: Make sure DMZ host is disabled.

Because our routers use NAT (Network Address Translation), you can only open a specific port to one computer at a time. For example: If you have 2 web servers on your network, you cannot open port 80 to both computers. You will need to configure 1 of the web servers to use port 81. Now you can open port 80 to the first computer and then open port 81 to the other computer.

Frequently Asked Questions (continued)

What are virtual servers?

A Virtual Server is defined as a service port, and all requests to this port will be redirected to the computer specified by the server IP. For example, if you have an FTP Server (port 21) at 192.168.0.5, a Web server (port 80) at 192.168.0.6, and a VPN (port 1723) server at 192.168.0.7, then you need to specify the following virtual server mapping table:

Server Port	Server IP	Enable
21	192.168.0.5	X
80	192.168.0.6	X
1723	192.168.0.7	X

How do I use *PC Anywhere* with my DI-824VUP+?

You will need to open 3 ports in the Virtual Server section of your D-Link router.

Step 1 Open your web browser and enter the IP Address of the router (192.168.0.1).

Step 2 Click on **Advanced** at the top and then click **Virtual Server** on the left side.

Step 3 Enter the information as seen below. The **Private IP** is the IP Address of the computer on your local network that you want to connect to.

Step 4 The first entry will read as shown here:

Step 5 Click **Apply** and then click **Continue**.


The screenshot shows the D-Link AirPlus G+ High-Speed 2.4GHz Wireless VPN Router web interface. The 'Advanced' tab is selected, and the 'Virtual Server' section is active. The 'Virtual Server' configuration page shows a list of virtual servers. The first entry is 'Virtual Server FTP' with a Private IP of 0.0.0.0, Protocol of TCP 21/21, and Schedule of always. The 'Apply' button is highlighted.

Name	Private IP	Protocol	Schedule
Virtual Server FTP	0.0.0.0	TCP 21 / 21	always
Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always
Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always
Virtual Server DNS	0.0.0.0	UDP 53 / 53	always

Frequently Asked Questions (continued)

How do I use *PC Anywhere* with my DI-824VUP+? (continued)

Step 6 Create a second entry as shown here:

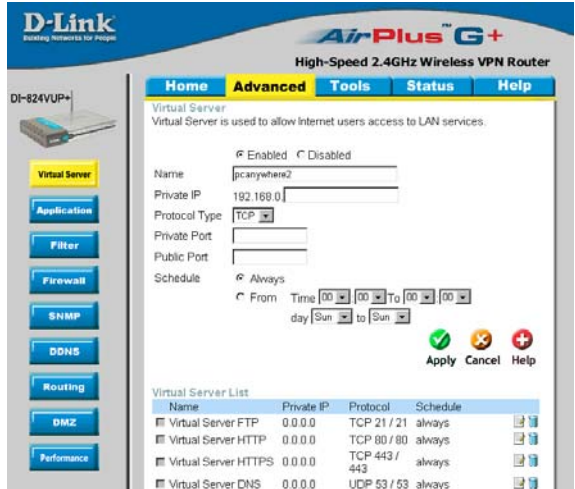

DI-824VUP+ High-Speed 2.4GHz Wireless VPN Router

Virtual Server

Virtual Server is used to allow Internet users access to LAN services.

Enabled Disabled

Name: pcanywhere2

Private IP: 192.168.0.1

Protocol Type: TCP

Private Port:

Public Port:

Schedule: Always


From Time [00] [00] To [00] [00] day [Sun] to [Sun]

Apply Cancel Help

Name	Private IP	Protocol	Schedule
Virtual Server FTP	0.0.0.0	TCP 21 / 21	always
Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always
Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always
Virtual Server DNS	0.0.0.0	UDP 53 / 53	always

Step 7 Click **Apply** and then click **Continue**.

Step 8 Create a third and final entry as shown here:

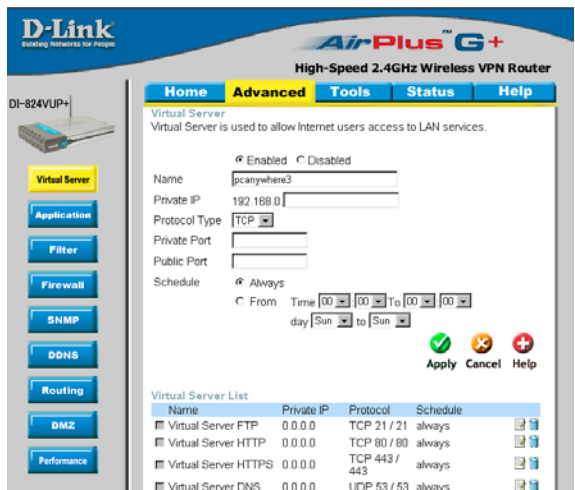

DI-824VUP+ High-Speed 2.4GHz Wireless VPN Router

Virtual Server

Virtual Server is used to allow Internet users access to LAN services.

Enabled Disabled

Name: pcanywhere3

Private IP: 192.168.0.1

Protocol Type: TCP

Private Port:

Public Port:

Schedule: Always

From Time [00] [00] To [00] [00] day [Sun] to [Sun]

Apply Cancel Help

Name	Private IP	Protocol	Schedule
Virtual Server FTP	0.0.0.0	TCP 21 / 21	always
Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always
Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always
Virtual Server DNS	0.0.0.0	UDP 53 / 53	always

Step 9 Click **Apply** and then click **Continue**.

Step 10 Run *PCAnywhere* from the remote site and use the WAN IP Address of the router, not your computer's IP Address.

Frequently Asked Questions (continued)

How can I use eDonkey behind my DI-824VUP+?

You must open ports on your router to allow incoming traffic while using eDonkey.

eDonkey uses three ports (4 if using CLI):

4661 (TCP) To connect with a server

4662 (TCP) To connect with other clients

4665 (UDP) To communicate with servers other than the one you are connected to.

4663 (TCP) *Used with the command line (CLI) client when it is configured to allow remote connections. This is the case when using a Graphical Interface (such as the Java Interface) with the client.

Step 1 Open your web browser and enter the IP Address of your router (192.168.0.1). Enter username (admin) and your password (leave blank).

Step 2 Click on **Advanced** and then click **Firewall**.

Step 3 Create a new firewall rule:

Click **Enabled**.

Enter a name (edonkey).

Click **Allow**.

Next to Source, select **WAN** under interface. In the first box, enter an *. Leave the second box empty.

Next to Destination, select **LAN** under interface. Enter the IP Address of the computer you are running eDonkey from. Leave the second box empty. Under Protocol, select *. In the port range boxes, enter **4661** in the first box and then **4665** in the second box.

Click **Always** or set a schedule.

The screenshot shows the D-Link AirPlus G+ router's web interface. The 'Advanced' tab is selected, and the 'Firewall' sub-tab is active. The 'Firewall Rules' section is visible, showing a rule named 'edonkey'. The rule is enabled, and its action is set to 'Allow'. The source is 'WAN' and the destination is 'LAN'. The protocol is set to '*' and the port range is 4661-4665. The schedule is set to 'Always'. The 'Firewall Rules List' table at the bottom shows the following rules:

Action	Name	Source	Destination	Protocol			
<input checked="" type="checkbox"/>	Allow	Allow to Ping WAN port	WAN,*	LAN,192.168.0.1	ICMP,*		
<input checked="" type="checkbox"/>	Deny	Default	*,*	LAN,-	192.168.0.1	*,*	
<input checked="" type="checkbox"/>	Allow	Default	LAN,*	*,-	192.168.0.1	*,*	

Step 4 Click **Apply** and then **Continue**.

Frequently Asked Questions (continued)

How do I set up my DI-824VUP+ for SOCOM on my Playstation 2?

To allow you to play SOCOM and hear audio, you must download the latest firmware for the router (if needed), enable Game Mode, and open port 6869 to the IP Address of your Playstation.

Step 1 Upgrade firmware (follow link above).

Step 2 Open your web browser and enter the IP Address of the router (192.168.0.1). Enter username (admin) and your password (blank by default).

Step 3 Click on the **Advanced** tab and then click on **Virtual Server** on the left side.

Step 4 You will now create a new Virtual Server entry. Click **Enabled** and enter a name (socom). Enter the IP Address of your Playstation for **Private IP**.

Step 5 For **Protocol Type** select Both. Enter **6869** for both the **Private Port** and **Public Port**. Click **Always**. Click **Apply** to save changes and then **Continue**

The screenshot shows the D-Link AirPlus G+ router's web interface. The 'Advanced' tab is selected, and the 'Virtual Server' section is active. The configuration for a new Virtual Server entry is shown as follows:

- Name:** SOCOM
- Private IP:** 192.168.0.100
- Protocol Type:** TCP
- Private Port:** 6869
- Public Port:** 6869
- Schedule:** Always

Below the configuration form is a table titled 'Virtual Server List' showing existing entries:

Name	Private IP	Protocol	Schedule	
<input type="checkbox"/> Virtual Server FTP	0.0.0.0	TCP 21 / 21	always	
<input type="checkbox"/> Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always	
<input type="checkbox"/> Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always	
<input type="checkbox"/> Virtual Server DNS	0.0.0.0	UDP 53 / 53	always	

Step 6 Click on the **Tools** tab and then **Misc** on the left side.

Step 7 Make sure **Gaming Mode** is Enabled. If not, click **Enabled**. Click **Apply** and then **Continue**.

Frequently Asked Questions (continued)

How can I use Gamespy behind my DI-824VUP+?

Step 1 Open your web browser and enter the IP Address of the router (192.168.0.1). Enter admin for the username and your password (blank by default).

Step 2 Click on the Advanced tab and then click Virtual Server on the left side.

Step 3 You will create 2 entries.

Step 4 Click Enabled and enter Settings:

NAME - Gamespy1

PRIVATE IP - The IP Address of your computer that you are running Gamespy from.

PROTOCOL TYPE - Both

PRIVATE PORT - 3783

The screenshot shows the 'Virtual Server' configuration page for the first entry, 'Gamespy1'. The 'Enabled' radio button is selected. The 'Name' field contains 'gamespy1', 'Private IP' is '192.168.0.100', 'Protocol Type' is 'Both', 'Private Port' is '3783', and 'Public Port' is '3783'. The 'Schedule' is set to 'Always'. The 'Virtual Server List' table below shows the following entries:

Name	Private IP	Protocol	Schedule
Virtual Server FTP	0.0.0.0	TCP 21 / 21	always
Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always
Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always
Virtual Server DNS	0.0.0.0	UDP 53 / 53	always

Click **Apply** and then **continue**

Step 5 Enter 2nd entry:

Click Enabled

NAME - Gamespy2

PRIVATE IP - The IP Address of your computer that you are running Gamespy from.

PROTOCOL TYPE - Both

PRIVATE PORT - 6500

PUBLIC PORT - 6500

SCHEDULE - Always.

The screenshot shows the 'Virtual Server' configuration page for the second entry, 'Gamespy2'. The 'Enabled' radio button is selected. The 'Name' field contains 'gamespy2', 'Private IP' is '192.168.0.100', 'Protocol Type' is 'Both', 'Private Port' is '6500', and 'Public Port' is '6500'. The 'Schedule' is set to 'Always'. The 'Virtual Server List' table below shows the following entries:

Name	Private IP	Protocol	Schedule
Virtual Server FTP	0.0.0.0	TCP 21 / 21	always
Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always
Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always
Virtual Server DNS	0.0.0.0	UDP 53 / 53	always

Click **Apply** and then **continue**.

Frequently Asked Questions (continued)

How do I configure my DI-824VUP+ for KaZaA and Grokster?

The following is for KaZaA, Grokster, and others using the FastTrack P2P file sharing system.

In most cases, you do not have to configure anything on the router or on the Kazaa software. If you are having problems, please follow steps below:

Step 1 Enter the IP Address of your router in a web browser (192.168.0.1).

Step 2 Enter your username (admin) and your password (blank by default).

Step 3 Click on Advanced and then click Virtual Server.

Step 4 Click Enabled and then enter a Name (kazaa for example).

Step 5 Enter the IP Address of the computer you are running KaZaA from in the Private IP box. Select TCP for the Protocol Type.

Step 6 Enter 1214 in the Private and Public Port boxes. Click Always under schedule or set a time range. Click Apply.

D-Link
Building Networks for People

AirPlus™ G+
High-Speed 2.4GHz Wireless VPN Router

DI-824VUP+

Virtual Server

Virtual Server is used to allow Internet users access to LAN services.

Enabled Disabled

Name: kazaa

Private IP: 192.168.0.100

Protocol Type: TCP

Private Port: 6659

Public Port: 6659

Schedule: Always

From Time [00][00] To [00][00] day [Sun] to [Sun]

Apply Cancel Help

Virtual Server List				
Name	Private IP	Protocol	Schedule	
<input type="checkbox"/> Virtual Server FTP	0.0.0.0	TCP 21 / 21	always	
<input type="checkbox"/> Virtual Server HTTP	0.0.0.0	TCP 80 / 80	always	
<input type="checkbox"/> Virtual Server HTTPS	0.0.0.0	TCP 443 / 443	always	
<input type="checkbox"/> Virtual Server DNS	0.0.0.0	UDP 53 / 53	always	

Make sure that you did not enable proxy/firewall in the KaZaA software.

Frequently Asked Questions (continued)

How do I configure my DI-824VUP+ to play Warcraft 3?

To host a Warcraft 3 game, you must open ports on your router to allow incoming traffic. To play a game, you do not have to configure your router.

Warcraft 3 (Battlenet) uses port 6112.

For the DI-824VUP+:

Step 1 Open your web browser and enter the IP Address of your router (192.168.0.1). Enter username (admin) and your password (leave blank).

Step 2 Click on **Advanced** and then click **Virtual Server**.

Step 3 Create a new entry: Click **Enabled**. Enter a name (warcraft3). Private IP - Enter the IP Address of the computer you want to host the game. Select **Both** for Protocol Type. Enter **6112** for both Private Port and Public Port. Click **Always** or set a schedule.


Step 4 Click **Apply** and then **Continue**.

Note: If you want multiple computers from your LAN to play in the same game that you are hosting, then repeat the steps above and enter the IP Addresses of the other computers. You will need to change ports. Computer #2 can use port 6113, computer #3 can use 6114, and so on.

You will need to change the port information within the Warcraft 3 software for computers #2 and up.

Configure the Game Port information on each computer:

Start Warcraft 3 on each computer, click **Options > Gameplay**. Scroll down and you should see **Game Port**. Enter the port number as you entered in the above steps.

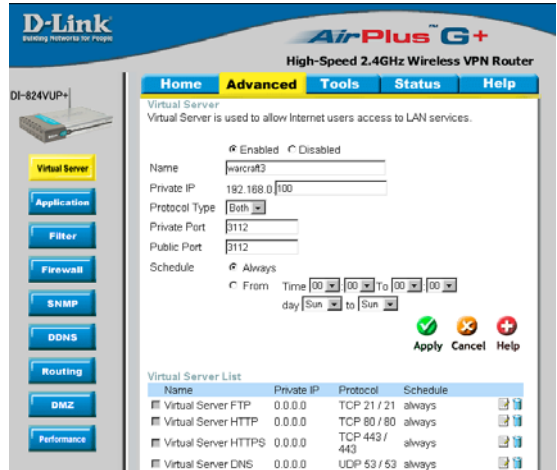

Frequently Asked Questions (continued)

How do I use NetMeeting with my DI-824VUP+?

Unlike most TCP/IP applications, NetMeeting uses **DYNAMIC PORTS** instead of STATIC PORTS. That means that each NetMeeting connection is somewhat different than the last. For instance, the HTTP web site application uses port 80. NetMeeting can use any of over 60,000 different ports.

All broadband routers using (only) standard NAT and all internet sharing programs like Microsoft ICS that use (only) standard NAT will NOT work with NetMeeting or other h.323 software packages.

The solution is to put the router in DMZ.

Note: A few hardware manufacturers have taken it on themselves to actually provide H.323 compatibility. This is not an easy task since the router must search each incoming packet for signs that it might be a netmeeting packet. This is a whole lot more work than a router normally does and may actually be a **weak point in the firewall**. D-Link is not one of the manufacturers.

To read more on this visit <http://www.HomenetHelp.com>

How do I set up my DI-824VUP+ to use iChat? -for Macintosh users-

You must open ports on your router to allow incoming traffic while using iChat.

iChat uses the following ports: 5060 (UDP), 5190 (TCP), and File Sharing 16384-16403 (UDP) to video conference with other clients.

Step 1 Open your web browser and enter the IP Address of your router (192.168.0.1). Enter username (admin) and your password (leave blank).

Step 2 Click on **Advanced** and then click **Firewall**.

Frequently Asked Questions (continued)

How do I set up my DI-824VUP+ to use iChat? -for Macintosh users- (continued)

Step 3 Create a new firewall rule:

Click **Enabled**.

Enter a name (ichat1).

Click **Allow**.

Next to Source, select **WAN** under interface.

In the first box, enter an *.

Leave the second box empty.

Next to Destination, select **LAN** under interface.

Enter the IP Address of the computer you are running iChat from.

D-Link Building Networks for People
AirPlus G+ High-Speed 2.4GHz Wireless VPN Router

Home **Advanced** Tools Status Help

Firewall Rules
Firewall Rules can be used to allow or deny traffic from passing through the DI-824VUP+.

Enabled Disabled

Name:

Action: Allow Deny

Interface: IP Start IP End Protocol Port Range

Source: WAN

Destination: LAN UDP

Schedule: Always
 From Time To
day to

Apply Cancel Help

ActionName	Source	Destination	Protocol	
<input checked="" type="checkbox"/> Allow	Allow to Ping WAN port	WAN,*	LAN,192.168.0.1 ICMP,*	<input type="checkbox"/>
<input checked="" type="checkbox"/> Deny	Default	**	LAN,192.168.0.1 **	<input type="checkbox"/>
<input checked="" type="checkbox"/> Allow	Default	LAN,*	*,192.168.0.1 **	<input type="checkbox"/>

Leave the second box empty. Under Protocol, select **UDP**. In the port range boxes, enter **5060** in the first box and leave the second box empty.

Click **Always** or set a schedule.

Step 4 Click **Apply** and then **Continue**.

Step 5

Repeat steps 3 and 4 enter **ichat2** and open ports **16384-16403** (UDP).

D-Link Building Networks for People
AirPlus G+ High-Speed 2.4GHz Wireless VPN Router

Home **Advanced** Tools Status Help

Firewall Rules
Firewall Rules can be used to allow or deny traffic from passing through the DI-824VUP+.

Enabled Disabled

Name:

Action: Allow Deny

Interface: IP Start IP End Protocol Port Range

Source: WAN

Destination: LAN UDP

Schedule: Always
 From Time To
day to

Apply Cancel Help

ActionName	Source	Destination	Protocol	
<input checked="" type="checkbox"/> Allow	Allow to Ping WAN port	WAN,*	LAN,192.168.0.1 ICMP,*	<input type="checkbox"/>
<input checked="" type="checkbox"/> Deny	Default	**	LAN,192.168.0.1 **	<input type="checkbox"/>
<input checked="" type="checkbox"/> Allow	Default	LAN,*	*,192.168.0.1 **	<input type="checkbox"/>

Frequently Asked Questions (continued)

How do I set up my DI-824VUP+ to use iChat? -for Macintosh users (continued)

For File Sharing:

Step 1 Click on **Advanced** and then **Virtual Server**.

Step 2 Check **Enabled** to activate entry.

Step 3 Enter a name for your virtual server entry (ichat3).


Step 4 Next to Private IP, enter the IP Address of the computer on your local network that you want to allow the incoming service to.

Step 5 Select **TCP** for Protocol Type.

Step 6 Enter **5190** next to Private Port and Public Port.

Step 7 Click **Always** or configure a schedule.

Step 8 Click **Apply** and then **Continue**.

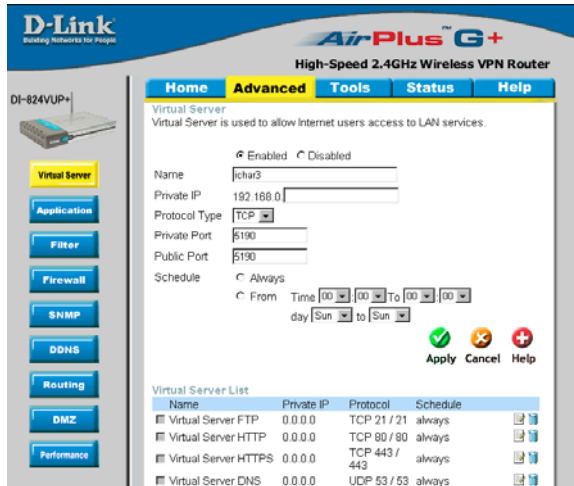

If using Mac OS X Firewall, you may need to temporarily turn off the firewall in the Sharing preference pane on both computers.

To use the Mac OS X Firewall, you must open the same ports as in the router:

Step 1 Choose **Apple menu > System Preferences**.

Step 2 Choose **View > Sharing**.

Step 3 Click the **Firewall** tab.

Step 4 Click **New**.

Step 5 Choose **Other** from the Port Name pop-up menu.

Step 6 In the Port Number, Range or Series field, type in: **5060, 16384-16403**.

Step 7 In the Description field type in: **iChat AV**

Step 8 Click **OK**.

Frequently Asked Questions (continued)

How do I send or receive a file via iChat when the Mac OS X firewall is active? - for Macintosh users - Mac OS X 10.2 and later

The following information is from the online Macintosh AppleCare knowledge base:

“iChat cannot send or receive a file when the Mac OS X firewall is active in its default state. If you have opened the AIM port, you may be able to receive a file but not send them.

In its default state, the Mac OS X firewall blocks file transfers using iChat or America Online AIM software. If either the sender or receiver has turned on the Mac OS X firewall, the transfer may be blocked.

The simplest workaround is to temporarily turn off the firewall in the Sharing preference pane on both computers. This is required for the sender. However, the receiver may keep the firewall on if the AIM port is open. To open the AIM port:

Step 1 Choose Apple menu > System Preferences.

Step 2 Choose View > Sharing.

Step 3 Click the Firewall tab.

Step 4 Click New.

Step 5 Choose AOL IM from the Port Name pop-up menu. The number 5190 should already be filled in for you.

Step 6 Click OK.

If you do not want to turn off the firewall at the sending computer, a different file sharing service may be used instead of iChat. The types of file sharing available in Mac OS X are outlined in technical document 106461, "Mac OS X: File Sharing" in the *AppleCare Knowledge base* online.

Note: If you use a file sharing service when the firewall is turned on, be sure to click the Firewall tab and select the service you have chosen in the "Allow" list. If you do not do this, the firewall will also block the file sharing service. “

Frequently Asked Questions (continued)

What is NAT?

NAT stands for **Network Address Translator**. It is proposed and described in RFC-1631 and is used for solving the IP Address depletion problem. Each NAT box has a table consisting of pairs of local IP Addresses and globally unique addresses, by which the box can “translate” the local IP Addresses to global address and vice versa. Simply put, it is a method of connecting multiple computers to the Internet (or any other IP network) using one IP Address.

D-Link’s broadband routers (ie: DI-824VUP+) support NAT. With proper configuration, multiple users can access the Internet using a single account via the NAT device.

For more information on RFC-1631: The IP Network Address Translator (NAT), visit <http://www.faqs.org/rfcs/rfc1631.html>

Contacting Technical Support

You can find the most recent software and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States for the duration of the warranty period on this product.

U.S. customers can contact D-Link technical support through our web site, or by phone.

D-Link Technical Support over the Telephone:

(877) 453-5465

24 hours a day, seven days a week.

D-Link Technical Support over the Internet:

<http://support.dlink.com>

When contacting technical support, you will need the information below. (Please look on the back side of the unit.)

- *Serial number of the unit*
- *Model number or product name*
- *Software type and version number*

Warranty and Registration

Subject to the terms and conditions set forth herein, D-Link Systems, Inc. (“D-Link”) provides this Limited warranty for its product only to the person or entity that originally purchased the product from:

- D-Link or its authorized reseller or distributor and
- Products purchased and delivered within the fifty states of the United States, the District of Columbia, U.S. Possessions or Protectorates, U.S. Military Installations, addresses with an APO or FPO.

Limited Warranty: D-Link warrants that the hardware portion of the D-Link products described below will be free from material defects in workmanship and materials from the date of original retail purchase of the product, for the period set forth below applicable to the product type (“Warranty Period”), except as otherwise stated herein.

3-Year Limited Warranty for the Product(s) is defined as follows:

- Hardware (excluding power supplies and fans) Three (3) Years
- Power Supplies and Fans One (1) Year
- Spare parts and spare kits Ninety (90) days

D-Link’s sole obligation shall be to repair or replace the defective Hardware during the Warranty Period at no charge to the original owner or to refund at D-Link’s sole discretion. Such repair or replacement will be rendered by D-Link at an Authorized D-Link Service Office. The replacement Hardware need not be new or have an identical make, model or part. D-Link may in its sole discretion replace the defective Hardware (or any part thereof) with any reconditioned product that D-Link reasonably determines is substantially equivalent (or superior) in all material respects to the defective Hardware. Repaired or replacement Hardware will be warranted for the remainder of the original Warranty Period from the date of original retail purchase. If a material defect is incapable of correction, or if D-Link determines in its sole discretion that it is not practical to repair or replace the defective Hardware, the price paid by the original purchaser for the defective Hardware will be refunded by D-Link upon return to D-Link of the defective Hardware. All Hardware (or part thereof) that is replaced by D-Link, or for which the purchase price is refunded, shall become the property of D-Link upon replacement or refund.

Limited Software Warranty: D-Link warrants that the software portion of the product (“Software”) will substantially conform to D-Link’s then current functional specifications for the Software, as set forth in the applicable documentation, from the date of original retail purchase of the Software for a period of ninety (90) days (“Warranty Period”), provided that the Software is properly installed on approved hardware and operated as contemplated in its documentation. D-Link further warrants that, during the Warranty Period, the magnetic media on which D-Link delivers the Software will be free of physical defects. D-Link’s sole obligation shall be to replace the non-conforming Software (or defective media) with software that substantially conforms to D-Link’s functional specifications for the Software or to refund at D-Link’s sole discretion. Except as otherwise agreed by D-Link in writing, the replacement Software is provided only to the original licensee, and is subject to the terms and conditions of the license granted by D-Link for the Software. Software will be warranted for the remainder of the original Warranty Period from the date of original retail purchase. If a material non-conformance is incapable of correction, or if D-Link determines in its sole discretion that it is not practical to replace the non-conforming Software, the price paid by the original licensee for the non-conforming Software will be refunded by D-Link; provided that the non-conforming Software (and all copies thereof) is first returned to D-Link. The license granted respecting any Software for which a refund is given automatically terminates.

Non-Applicability of Warranty: The Limited Warranty provided hereunder for hardware and software of D-Link’s products will not be applied to and does not cover any refurbished product and any product purchased through the inventory clearance or liquidation sale or other sales in which D-Link, the sellers, or the liquidators expressly disclaim their warranty obligation pertaining to the product and in that case, the product is being sold “As-Is” without any warranty whatsoever including, without limitation, the Limited Warranty as described herein, notwithstanding anything stated herein to the contrary.

Submitting A Claim: The customer shall return the product to the original purchase point based on its return policy. In case the return policy period has expired and the product is within warranty, the customer shall submit a claim to D-Link as outlined below:

- The customer must submit with the product as part of the claim a written description of the Hardware defect or Software nonconformance in sufficient detail to allow D-Link to confirm the same.

- The original product owner must obtain a Return Material Authorization (“RMA”) number from the Authorized D-Link Service Office and, if requested, provide written proof of purchase of the product (such as a copy of the dated purchase invoice for the product) before the warranty service is provided.
- After an RMA number is issued, the defective product must be packaged securely in the original or other suitable shipping package to ensure that it will not be damaged in transit, and the RMA number must be prominently marked on the outside of the package. Do not include any manuals or accessories in the shipping package. D-Link will only replace the defective portion of the Product and will not ship back any accessories.
- The customer is responsible for all in-bound shipping charges to D-Link. No Cash on Delivery (“COD”) is allowed. Products sent COD will either be rejected by D-Link or become the property of D-Link. Products shall be fully insured by the customer and shipped to **D-Link Systems, Inc., 17595 Mt. Herrmann, Fountain Valley, CA 92708**. D-Link will not be held responsible for any packages that are lost in transit to D-Link. The repaired or replaced packages will be shipped to the customer via UPS Ground or any common carrier selected by D-Link, with shipping charges prepaid. Expedited shipping is available if shipping charges are prepaid by the customer and upon request.

D-Link may reject or return any product that is not packaged and shipped in strict compliance with the foregoing requirements, or for which an RMA number is not visible from the outside of the package. The product owner agrees to pay D-Link’s reasonable handling and return shipping charges for any product that is not packaged and shipped in accordance with the foregoing requirements, or that is determined by D-Link not to be defective or non-conforming.

What Is Not Covered: This limited warranty provided by D-Link does not cover: Products, if in D-Link’s judgment, have been subjected to abuse, accident, alteration, modification, tampering, negligence, misuse, faulty installation, lack of reasonable care, repair or service in any way that is not contemplated in the documentation for the product, or if the model or serial number has been altered, tampered with, defaced or removed; Initial installation, installation and removal of the product for repair, and shipping costs; Operational adjustments covered in the operating manual for the product, and normal maintenance; Damage that occurs in shipment, due to act of God, failures due to power surge, and cosmetic damage; Any hardware, software, firmware or other products or services provided by anyone other than D-Link; Products that have been purchased from inventory clearance or liquidation sales or other sales in which D-Link, the sellers, or the liquidators expressly disclaim their warranty obligation pertaining to the product. Repair by anyone other than D-Link or an Authorized D-Link Service Office will void this Warranty.

Disclaimer of Other Warranties: EXCEPT FOR THE LIMITED WARRANTY SPECIFIED HEREIN, THE PRODUCT IS PROVIDED “AS-IS” WITHOUT ANY WARRANTY OF ANY KIND WHATSOEVER INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT. IF ANY IMPLIED WARRANTY CANNOT BE DISCLAIMED IN ANY TERRITORY WHERE A PRODUCT IS SOLD, THE DURATION OF SUCH IMPLIED WARRANTY SHALL BE LIMITED TO NINETY (90) DAYS. EXCEPT AS EXPRESSLY COVERED UNDER THE LIMITED WARRANTY PROVIDED HEREIN, THE ENTIRE RISK AS TO THE QUALITY, SELECTION AND PERFORMANCE OF THE PRODUCT IS WITH THE PURCHASER OF THE PRODUCT.

Limitation of Liability: TO THE MAXIMUM EXTENT PERMITTED BY LAW, D-LINK IS NOT LIABLE UNDER ANY CONTRACT, NEGLIGENCE, STRICT LIABILITY OR OTHER LEGAL OR EQUITABLE THEORY FOR ANY LOSS OF USE OF THE PRODUCT, INCONVENIENCE OR DAMAGES OF ANY CHARACTER, WHETHER DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL (INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF GOODWILL, LOSS OF REVENUE OR PROFIT, WORK STOPPAGE, COMPUTER FAILURE OR MALFUNCTION, FAILURE OF OTHER EQUIPMENT OR COMPUTER PROGRAMS TO WHICH D-LINK’S PRODUCT IS CONNECTED WITH, LOSS OF INFORMATION OR DATA CONTAINED IN, STORED ON, OR INTEGRATED WITH ANY PRODUCT RETURNED TO D-LINK FOR WARRANTY SERVICE) RESULTING FROM THE USE OF THE PRODUCT, RELATING TO WARRANTY SERVICE, OR ARISING OUT OF ANY BREACH OF THIS LIMITED WARRANTY, EVEN IF D-LINK HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE SOLE REMEDY FOR A BREACH OF THE FOREGOING LIMITED WARRANTY IS REPAIR, REPLACEMENT OR REFUND OF THE DEFECTIVE OR NON-CONFORMING PRODUCT. THE MAXIMUM LIABILITY OF D-LINK UNDER THIS WARRANTY IS LIMITED TO THE PURCHASE PRICE OF THE PRODUCT COVERED BY THE WARRANTY. THE FOREGOING EXPRESS WRITTEN WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ANY OTHER WARRANTIES OR REMEDIES, EXPRESS, IMPLIED OR STATUTORY

Governing Law: This Limited Warranty shall be governed by the laws of the State of California. Some states do not allow exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the foregoing limitations and exclusions may not apply. This limited warranty provides specific legal rights and the product owner may also have other rights which vary from state to state.

Trademarks: D-Link is a registered trademark of D-Link Systems, Inc. Other trademarks or registered trademarks are the property of their respective manufacturers or owners.

Copyright Statement: No part of this publication or documentation accompanying this Product may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from D-Link Corporation/D-Link Systems, Inc., as stipulated by the United States Copyright Act of 1976. Contents are subject to change without prior notice. Copyright© 2002 by D-Link Corporation/D-Link Systems, Inc. All rights reserved.

CE Mark Warning: This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

FCC Statement: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

The Manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment; such modifications could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. The antenna(s) used for this equipment must be installed to provide a separation distance of at least eight inches (20 cm) from all persons.

This transmitter must not be operated in conjunction with any other antenna.

Register online your D-Link product at <http://support.dlink.com/register/>