

## Product Highlights

### True Gigabit Speed

Enjoy lightning-fast Gigabit speeds without the need for installing a new network card simply by using any available USB Type-C port on your device

### Full Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

### Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0

### Dual-Slot SD Card Reader

Dual-slot SD card reader is compatible with both SD and microSD cards



## DUB-M810

# 8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery

## Features

### Gigabit Ethernet Connectivity

- Achieve transfer speeds of up to 1 Gbps
- Status LEDs for connection status and data transfer speed
- Auto 10/100/1000 Mbps speed detection to always use the highest available speed

### High Fidelity Video Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

### SD Card Compatibility


- SD card & microSD card
- SD, SDHC, SDXC (UHS-I mode)

### Versatile and Convenient

- Three USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A)
- One USB 3.0 port supports Quick Charge BC1.2
- Simply plug-and-play, no software required

The DUB-M810 8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery allows you to instantly add a second display, a SD card reader, a Gigabit Ethernet port, three additional USB 3.0 ports, with one that can fast-charge, as well as a USB Type-C port with charging ability to your ultra-portable computer. Just plug the DUB-M810 into an available USB Type-C port and you're ready to send content to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to 3 more USB devices, as well as insert a microSD or regular SD card, giving you direct access to your full resolution photos stored on memory cards from your cameras. You can also sync and charge one USB Type-C device, meaning that you don't have to give up that USB Type-C port this hub is connected to.

## Hardware Overview

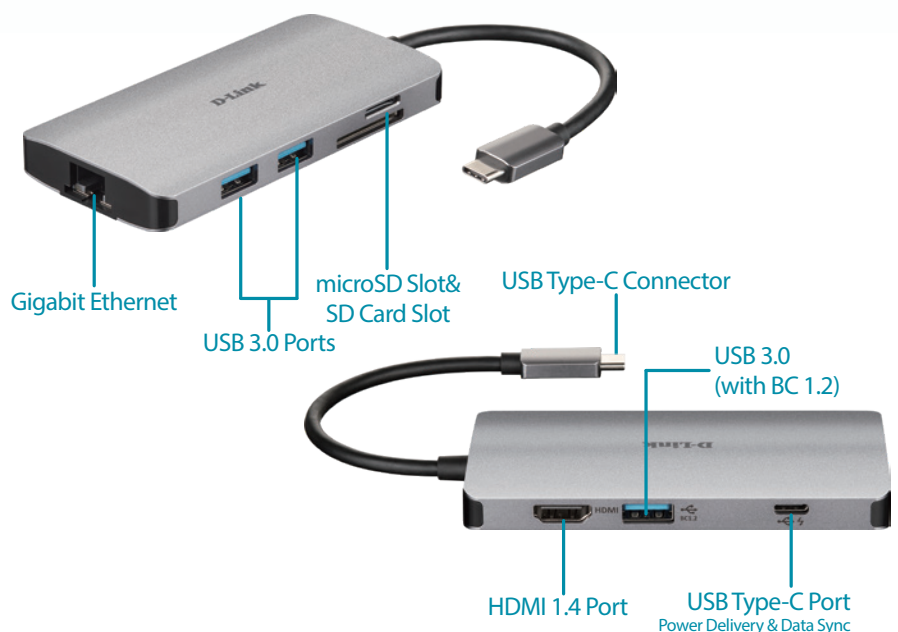

## 8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery

## Technical Specifications

## Connectivity

Device Interfaces	<ul style="list-style-type: none"> <li>HDMI port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz)</li> <li>microSD and SD card slots</li> <li>Three USB 3.0 Type-A ports (One port support BC1.2)</li> <li>RJ-45 Gigabit Ethernet port (10/100/1000 Mbps)</li> </ul>	<ul style="list-style-type: none"> <li>One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A)</li> <li>USB Type-C connector (Thunderbolt 3 compliant)</li> </ul>
Standards	<ul style="list-style-type: none"> <li>USB Specification Version 3.0</li> <li>USB Specification Version 2.0</li> <li>USB Specification Version 1.1</li> <li>Quick Charge BC 1.2</li> <li>SD, SDHC, SDXC (UHS-I mode)</li> <li>HDMI 1.4</li> <li>HDCP 2.2</li> </ul>	<ul style="list-style-type: none"> <li>DisplayPort Alternate Mode</li> <li>OHCI (Open Host Controller Interface)</li> <li>EHCI (Enhanced Host Controller Interface)</li> <li>IEEE 802.3 Ethernet</li> <li>IEEE 802.3u Fast Ethernet</li> <li>IEEE 802.3ab Gigabit Ethernet</li> <li>IEEE 802.3x flow control</li> </ul>

## General

Minimum System Requirements	<ul style="list-style-type: none"> <li>Computer running Microsoft Windows, Mac OS, or Chrome OS</li> </ul>	<ul style="list-style-type: none"> <li>A USB Type-C port with DisplayPort Alternate Mode support</li> </ul>
-----------------------------	--	---

## Physical

Dimensions (W x H x D)	<ul style="list-style-type: none"> <li>105 x 52 x 13 mm</li> </ul>	<ul style="list-style-type: none"> <li>Cable length: 15 cm</li> </ul>
Weight	<ul style="list-style-type: none"> <li>82.0 g</li> </ul>	
Power	<ul style="list-style-type: none"> <li>Input: Bus-powered</li> </ul>	<ul style="list-style-type: none"> <li>Consumption: 80 mA, 5 V DC</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>Operating: 0 to 45 °C (32 to 113 °F)</li> </ul>	<ul style="list-style-type: none"> <li>Storage: -10 to 70 °C (14 to 158 °F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>Operating: 10% to 85% RH, non-condensing</li> </ul>	<ul style="list-style-type: none"> <li>Storage: 5% to 90% RH, non-condensing</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>CE</li> <li>IC</li> </ul>	<ul style="list-style-type: none"> <li>FCC</li> <li>RCM</li> </ul>



For more information: [www.dlink.com](http://www.dlink.com)

**D-Link European Headquarters.** D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.

Updated September 2019

**D-Link**<sup>®</sup>