

Product Highlights

Complete Day/Night Surveillance Solution

Keep watch over an area 24 hours a day with built-in night vision; the IR LEDs and automatic IR cut filter give you a clear picture, even in complete darkness

Sound and Motion Detection

Never miss an important moment with sound and motion detection that can send notifications with snapshots right to your e-mail inbox

mydlink™-enabled Cloud Access

Easy setup, management and remote viewing of your camera through the free mydlink™ app on your mobile device or via the secure mydlink™ web portal



DCS-932L

Wi-Fi Day/Night Camera

Features

Camera

- High quality VGA CMOS sensor for excellent image quality
- Built-in IR LEDs to capture video in low-light environments, or even complete darkness

Security

- Motion detection with configurable detection windows
- Sound level detection
- Send notifications and snapshots to your e-mail address

Ease Of Use

- Wireless 802.11n/g/b connection lets you install the camera anywhere
- WPS support for easy wireless connection
- UPnP & DDNS support

mydlink Functionality

- mydlink enabled so you can check on your camera anytime, anywhere
- View and manage your camera through the mydlink website
- Supports the mydlink Lite and mydlink+ apps for remote viewing on your mobile device

The DCS-932L Wi-Fi Day/Night Camera is a complete surveillance solution for your home or small office. The built-in night vision gives you 24 hour surveillance complete with motion and sound detection. It's mydlink enabled too, so you can check on your camera anytime, anywhere from any PC, tablet, or mobile phone.

Peace Of Mind With 24/7 Monitoring Of Any Environment

The DCS-932L is a standalone surveillance camera that requires no special hardware or software, and can run independently even without a PC. Send e-mail notifications with snapshots whenever motion or sound is detected using just the DCS-932L and an Internet connection. You can customise areas of the video to monitor for motion to keep watch over entryways, and you can set volume limits to detect when a loud sound is picked up by the camera. Night time monitoring is possible with the built-in infrared LEDs which allow for night time viewing of up to 5 meters, enabling round-the-clock monitoring of a home or small office.

mydlink™: the easiest way to setup up your camera and monitor your home

Connecting a camera on your network and accessing it has traditionally required complex configuration. mydlink™ makes it easy to access your camera from wherever you are, whenever it's convenient for you. Using the free mydlink™ Lite app for iOS and Android smartphones and tablets, you can connect and setup your mydlink™ camera without turning on a computer. A step-by-step guide has your camera up and running in a matter of minutes. Through the mydlink™ Lite app, you can set up a free mydlink™ account which allows you to view and manage your camera from any Internet connected computer. If you have more than one camera, you can add it to your existing mydlink™ account and watch all your cameras from a single location.

Accessing your cameras on the go is easy too. Just download the free mydlink™ Lite app for your iOS, Android or Windows Phone device and you can quickly and easily view your camera feed from anywhere with a wireless or 3G/4G LTE connection. Thanks to this app, you can monitor on-the-go even if you don't have access to a computer.

If you have a mydlink™-enabled Cloud Router, setting up and configuring your DCS-932L is a snap, thanks to Zero Configuration. Simply connect your camera to its power adapter and then connect your camera to your Cloud Router with an Ethernet cable - the camera will automatically be added to your account.

mydlink™ Lite App



With the free mydlink™ Lite app for iOS, Android and Windows Phone devices you can quickly and easily monitor your home or office anywhere with a Wi-Fi or mobile Internet connection.


Create a Comprehensive Surveillance System

Included with the DCS-932L is the D-ViewCam software, which adds enhanced features and functionality that helps you create a full surveillance system. D-ViewCam enables centralised management of multiple network cameras, supporting up to 32 network cameras and up to 64 users. With a dedicated computer it offers digital monitoring and recording with a wide array of features, including scheduled, motion and manual recording options for individual needs.

Front View



Back View

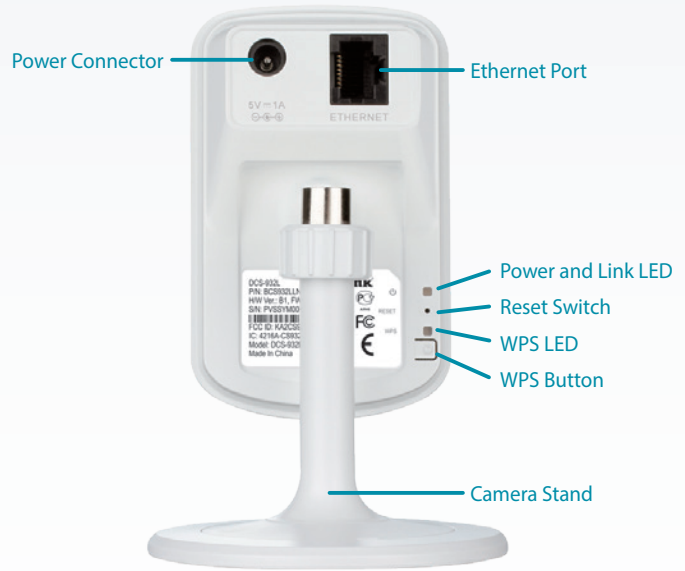

Technical Specifications

Camera

Camera Hardware Profile	<ul style="list-style-type: none"> • 1/5"VGA progressive CMOS sensor • Fixed length 3.15 mm • Aperture F2.8 • Angle of view <ul style="list-style-type: none"> • (H) 45.3° • (V) 34.5° • (D) 54.9° 	<ul style="list-style-type: none"> • Exposure Time: 1/3.75 to 1/14,640 sec. • 4X digital zoom • Minimum object distance: 500 mm • Built-in microphone • 5 metre IR illumination distance • Minimum illumination: 0 lux with IR LEDs on • Built-in Infrared-Cut Removable (ICR) Filter module
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, and frame rate • Time stamp and text overlays 	<ul style="list-style-type: none"> • Configurable motion detection windows • Configurable brightness, saturation, contrast
Video Compression	<ul style="list-style-type: none"> • MJPEG format compression 	<ul style="list-style-type: none"> • JPEG for still images
Video Resolution	<ul style="list-style-type: none"> • 640 x 480 at 20 fps 	<ul style="list-style-type: none"> • 320 x 240 / 160 x 112 at 30 fps
Audio	<ul style="list-style-type: none"> • PCM 	
Connectivity	<ul style="list-style-type: none"> • 10/100 BASE-TX Ethernet port • 802.11n/b/g wireless with WEP/WPA/WPA2 encryption • Operates over 2.4 GHz frequency band 	<ul style="list-style-type: none"> • Single-band 1T1R mode supports a maximum data rate of 72.2 Mbps (PHY rate) using 20 MHz bandwidth

DCS-932L Wi-Fi Day/Night Camera

Network		
Network Protocols	<ul style="list-style-type: none"> • IPv4 • ARP • TCP • UDP • ICMP • DHCP Client • NTP Client (D-Link) • DNS Client 	<ul style="list-style-type: none"> • DDNS Client (D-Link) • SMTP Client • FTP Client • HTTP Server • PPPoE • UPnP Port Forwarding • LLTD
Security	<ul style="list-style-type: none"> • Password authentication 	<ul style="list-style-type: none"> • HTTP digest encryption
System Integration		
System Requirements for Web Interfaces	<ul style="list-style-type: none"> • Operating system: Microsoft Windows 8/7/Vista or Mac OS X 10.6 or higher • Browser: Internet Explorer 7, Firefox 12, Safari 6, or Chrome 20 or higher with Java installed and enabled 	
Event Management	<ul style="list-style-type: none"> • Motion detection • Sound level detection 	<ul style="list-style-type: none"> • Event notification and sending snapshots via SMTP
Remote Management	<ul style="list-style-type: none"> • Configuration accessible via web browser 	
Mobile support	<ul style="list-style-type: none"> • mydlink Lite app for iPhone/iPad/iPod touch, Android, and Windows Phone 	
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> • Operating System: Microsoft Windows 8/7/Vista/XP 	<ul style="list-style-type: none"> • Web Browser: Internet Explorer 7 or higher
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> • Remote management/control of up to 32 cameras • Viewing of up to 32 cameras on one screen • Supports all management functions provided in web interface 	<ul style="list-style-type: none"> • Scheduled motion triggered, or manual recording options
General		
Dimensions	<ul style="list-style-type: none"> • Camera only: 60 x 32.15 x 96 mm (2.36 x 1.27 x 3.78 in.) 	<ul style="list-style-type: none"> • With base: 80 x 80 x 126.6 mm (3.15 x 3.15 x 4.98 in.)
Weight	<ul style="list-style-type: none"> • Camera only: 57.8 grams (2.04 ounces) ± 5% 	<ul style="list-style-type: none"> • With base: 91.8 grams (3.24 ounces) ± 5%
Power	<ul style="list-style-type: none"> • 5 V DC 1 A, 50/60 Hz 	
Power Consumption	<ul style="list-style-type: none"> • 2.84 watts maximum ± 5% 	
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 40 °C (32 to 104 °F) 	<ul style="list-style-type: none"> • Storage: -20 to 70° C (-4 to 158 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 20% to 80% non-condensing 	<ul style="list-style-type: none"> • Storage: 5% to 95% non-condensing
Certifications	<ul style="list-style-type: none"> • CE • FCC Class B 	<ul style="list-style-type: none"> • IC • C-Tick
Dimensions Diagram	<p>The diagram shows two views of the camera. The left view is a side profile showing a height of 96 mm (3.78 in.) and a width of 32.15 mm (1.27 in.). The right view is a front view showing a height of 96 mm (3.78 in.) and a width of 60 mm (2.36 in.).</p>	



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., D-Link House, Abbey Road, Park Royal, London, NW10 7BX. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2014 D-Link Corporation. All rights reserved. E&OE.

Updated September 2014

D-Link®
Building Networks for People