



RANGEBOOSTER N ADSL2+ ROUTER

HIGH-SPEED ADSL2/2+ INTERNET CONNECTION

Latest ADSL2/2+ standards provide Internet transmission of up to 24Mbps downstream, 1Mbps upstream

HIGH-PERFORMANCE WIRELESS

Embedded latest draft 802.11n technology for high-speed wireless connection, complete compatibility with 802.11b/g wireless devices

TOTAL SECURITY & QoS

Firewall protection from Internet attacks, user access control, WPA/WPA2 wireless security and priority queues for smooth VoIP traffic/streaming multimedia

ULTIMATE INTERNET CONNECTION

The DSL-2740B RangeBooster N ADSL2+ router is a versatile, high-performance remote router for home and the small office. With integrated ADSL2/2+ supporting up to 24Mbps download speed, firewall protection, Quality of Service (QoS), draft 802.11n wireless LAN and 4 Ethernet switch ports, this router provides all the functions that a home or small office needs to establish a secure and high-speed remote link to the outside world.

ULTIMATE WIRELESS CONNECTION WITH MAXIMAL SECURITY

Powered by RangeBooster N technology, this router provides wireless speeds that are up to 4 times faster than 802.11g¹. Maximize wireless performance by connecting this router to computers equipped with RangeBooster N wireless interfaces and stay connected from virtually anywhere at home and in the office. The router can also be used with 802.11g and 802.11b wireless networks to enable significantly improved reception. It supports WPA/WPA2 and WEP for flexible user access security and data encryption methods.

FIREWALL PROTECTION & QoS



Security features prevents unauthorized access to the home and office network, be it from the wireless devices or from the Internet. The router provides firewall security using Stateful Packet Inspection (SPI) and hacker attack logging for Denial of Service (DoS) attack protection. SPI inspects the contents of all incoming packet headers before deciding what packets are allowed to pass through. Router access control is provided with packet filtering based on port and source/destination MAC/IP addresses. For Quality of Service (QoS), the router supports multiple priority queues to enable a group of home or office users to experience the benefit of smooth network connection of inbound and outbound data without concern of traffic congestion. This QoS support allows users to enjoy high ADSL transmission for applications such as VoIP and streaming multimedia over the Internet.

WHAT THIS PRODUCT DOES

This RangeBooster N ADSL2+ Router connects a group of users to the Internet, allowing multiple computers at home or the office to share an integrated high-speed ADSL2+ interface. It provides high-performance draft 802.11n wireless access for wireless networked computers, 4 built-in Ethernet ports, firewall protection and QoS for smooth and secure download/upload of photos, files, music, video and e-mail over the Internet.

GET HIGH ADSL AND WIRELESS PERFORMANCE

Ready ADSL connection with up to 24Mbps downstream and 1Mbps upstream. Watch TV, listen to live music and broadcast on the Internet, and experience clear Internet phone calls. Built-in high-performance draft 802.11n wireless LAN means that you don't have to compromise high-speed ADSL transmission with wireless speed constraints. Now, smooth streaming multimedia and VoIP voice are possible anywhere at home and in the office, without even the need to hook up any network wires.

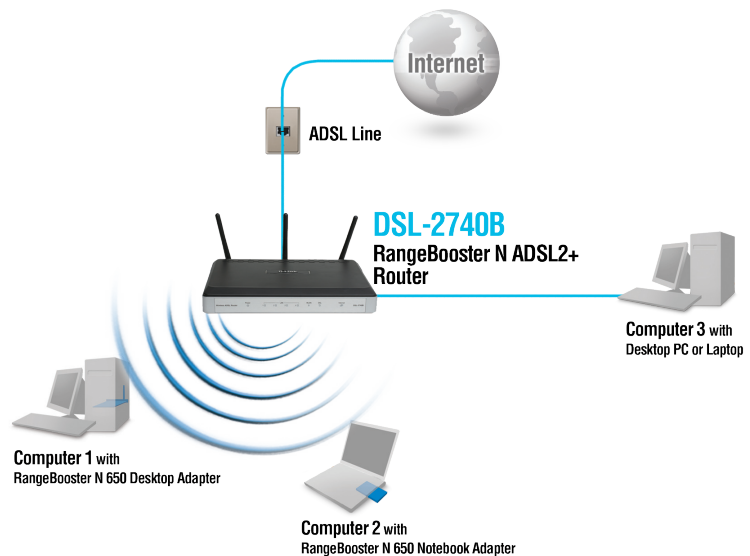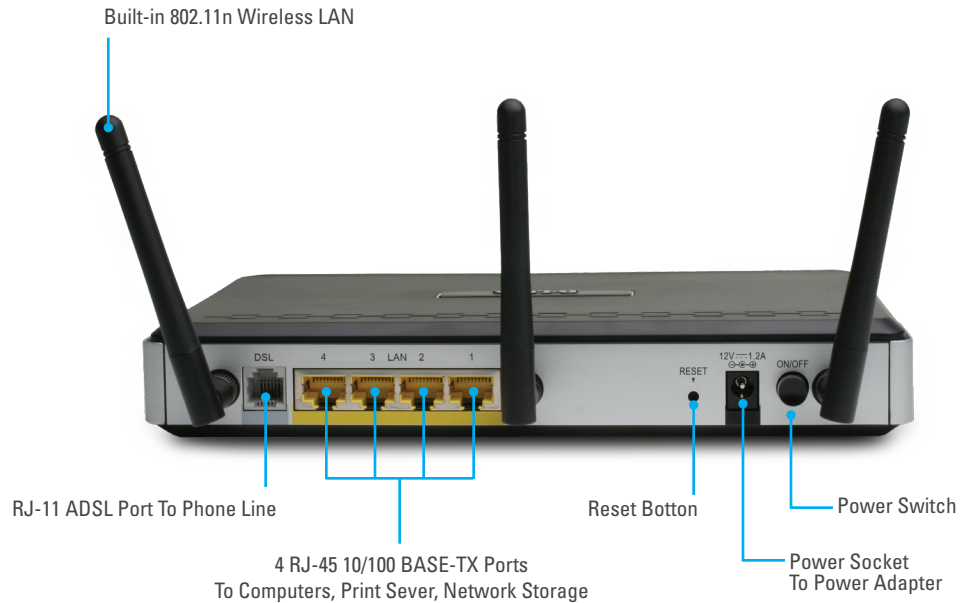

TECHNICAL SPECIFICATIONS

DEVICE INTERFACES

- + RJ-11 ADSL port
- + 4 RJ-45 10/100BASE-TX Ethernet ports with auto MDI/MDIX
- + Built-in draft 802.11n wireless LAN
- + Factory reset button

WIRELESS LAN

- + 802.11b/g standards
- + 802.11n draft
- + Wireless speed: up to 54Mbps (802.11G), 270Mbps (802.11n) 1
- + Frequency range: 2.4 GHz to 2.484G Hz
- + Antennas: 3 detachable dipole antennas, each with 2dBi Gain and RP-SMA connector
- + 64/128 bits WEP data encryption
- + WPA/WPA2 (Wi-Fi Protected Access) security
- + Multiple SSID
- + 802.11e Wireless QoS (WMM/WME)
- + MAC address-based access control

ADSL STANDARDS

- + ADSL standards: Multi-mode, ANSI T1.413 Issue 2, ITU G.992.1 (G.dmt) Annex A, ITU G.992.2 (G.lite) Annex A, ITU G.994.1 (G.hs)
- + ADSL2 standards: ITU G.992.3 (G.dmt.bis) Annex A/L/M, ITU G.992.4 (G.lite.bis) Annex A
- + ADSL2+ standards: ITU G.992.5 Annex A/L/M

ADSL DATA RATES

- + G.dmt: 8Mbps downstream, 832Kbps upstream
- + G.lite: 1.5Mbps downstream, 512Kbps upstream
- + ADSL2: 12Mbps downstream, 1Mbps upstream
- + ADSL2+: 24Mbps downstream, 1Mbps upstream

ATM & PPP PROTOCOLS

- + ATM Forum UNI3.1/4.0 PVC (up to 16PVCs)
- + ATM Adaptation Layer Type 5 (AAL5)
- + ATM QoS (Traffic Shaping)
- + Bridged or routed Ethernet encapsulation
- + VC and LLC based multiplexing
- + PPP over Ethernet (PPPoE)
- + PPP over ATM (RFC 2364)
- + ITU-T I.610 OAM F4/F5

ROUTER FEATURES

- + NAT (maximum 1024 NAT sessions)
- + DHCP server/client/relay
- + Static Routing, RIP v.1, v.2
- + Universal Plug and Play (UPnP) Compliant
- + Dynamic Domain Name System (DDNS)
- + Virtual Server
- + SNTP, DNS proxy and IGMP proxy

FIREWALL

- + Built-in NAT firewall
- + Stateful Packet Inspection (SPI)
- + DoS attacks prevention
- + Packet filtering (IP/ICMP/TCP/UDP)
- + Intrusion Detection System (IDS)
- + DMZ

VIRTUAL PRIVATE NETWORK (VPN)

- + Multiple PPTP/IPSec/L2TP pass-through

DEVICE CONFIGURATION/MANAGEMENT

- + Installation Wizard
- + Web-based GUI for configuration, firmware upgrade
- + Code lock to prevent improper firmware upgrade
- + Telnet with SSH support
- + Syslog monitoring
- + SNMP v1, v2c support with built-in MIB-II (RFC 1213)

QUALITY OF SERVICE

- + LAN to WAN traffic prioritization/Classification
- + 802.1p (0 to 7) traffic prioritization
- + Traffic Shaping

SECURITY

- + IGMP Snooping with 32 Multicast groups
- + PVC/VLAN port mapping (bridge mode)

POWER INPUT

- + Through 12VAC 1.2A external power adapter

DIAGNOSTIC LEADS

- + Power
- + LAN (1 to 4)
- + WLAN
- + DSL
- + Internet

DIMENSIONS

220 x 150 x 32 mm
(8.66 x 5.90 x 1.26 inches)

WEIGHT

610 grams (1.34 lb)

OPERATING TEMPERATURE

0° to 40° C (32° to 104° F)

STORAGE TEMPERATURE

-20° to 70° C (-4° to 158° F)

OPERATING HUMIDITY

5% to 95% non-condensing

Certifications

- + FCC Part 15 Class B
- + CE (EN55022/EN55024/EN300 328/EN301 489)
- + CSA
- + LVD



¹ Maximum wireless signal rate derived from IEEE standard 802.11g and draft 802.11n specifications. 802.11n speeds obtainable when operating among RangeBooster N products. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. RangeBooster N products are based on draft IEEE 802.11n specifications and are not guaranteed to be forward compatible with future versions of the IEEE 802.11n specifications. Compatibility with draft 802.11n devices from other manufacturers is not guaranteed. All references to speed are for comparison purposes only.

D-Link Worldwide Offices

U.S.A.	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Spain	TEL: 34-93-4090770	FAX: 34-93-4910795	Turkey	TEL: 90-312-473-40-55	FAX: 90-312-473-40-58
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Portugal	TEL: 351-21-8688493		Egypt	TEL: 202-291-9035	FAX: 202-291-9051
Europe (U. K.)	TEL: 44-20-8955-9000	FAX: 44-20-8955-9001	Czech Republic	TEL: 420-(603)-276-589		Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Germany	TEL: 49-6196-77990	FAX: 49-6196-7793000	Switzerland	TEL: 41-(0)-1-832-11-00	FAX: 41(0)-1-832-11-01	LatinAmerica	TEL: 56-2-232-3185	FAX: 56-2-232-0923
France	TEL: 33-1-30238688	FAX: 33-1-30238689	Greece	TEL: 30-210-9914 512	FAX: 30-210-9916902	Brazil	TEL: 55-11-218-53000	FAX: 55-11-218-5322
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	Luxemburg	TEL: 32-(0)2-517-7111	FAX: 32-(0)2-517-6500	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500	Poland	TEL: 48-(0)-22-583-92-75	FAX: 48-(0)-22-583-92-76	Russia	TEL: 7-495-744-0099	FAX: 7-495-744-0099 #350
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Hungary	TEL: 36-(0)-1-461-30-00	FAX: 36-(0)-1-461-30-09	Japan	TEL: 81-3-5781-0963	FAX: 81-3-5781-0965
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322	China	TEL: 86-10-58635800	FAX: 86-10-58635799
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-8168
Norway	TEL: 47-99-300-100	FAX: 47-22-309580	India	TEL: 91-022-26526696	FAX: 91-022-26528914	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898
Finland	TEL: 358-9-2707 5080	FAX: 358-9-2707-5081	Middle East (Dubai)	TEL: 971-4-3916480	FAX: 971-4-3908881			