



AirSpot Ticket Printer

The DSA-3100P AirSpot Ticket Printer is a convenient thermal line printer designed for use with D-Link Public/Private AirSpot Gateways such as the DSA-3100 and DSA-3200. Operating in conjunction with these D-Link AirSpot Gateways, this printer prints log-in user names and passwords, and can print other information like fee rate and bills for hot spot customers.

Allows Easy Management & Control of Hot Spot Customers

The DSA-3100P Ticket Printer connects to the D-Link AirSpot Gateway through an RS-232 serial port. It provides hot spot operators the ability to manage and control user access to their Internet service.

Easy Loading/Printing Mechanism

The DSA-3100P has a 2-inch easy loading printing mechanism with an integrated control board using serial communication protocols. Two function buttons are provided on the front: "Feed" to feed the paper, and "Print" to print a customer slip. You simply press the button to do the job.

Function & Features

- Thermal line printer
- Paper roll housing
- Tear bar for paper cutting
- Control panel with push button & LED indicator
- 25-pin RS-232 connection to host gateway
- Convenient paper "Feed" and "Print" press buttons


AirSpot Gateway RS-232 Printer Cable



DSA-3100

DSA-3100P
Ticket Printer

Cover group with paper cutting

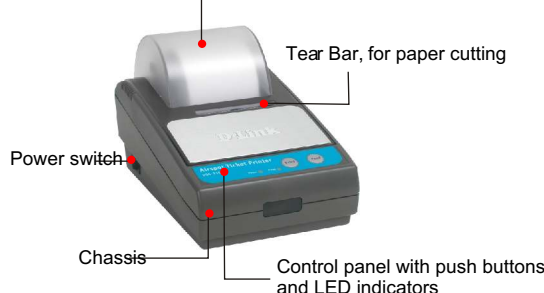

25-pin RS-232 connector
10V DC 3A power jack

DSA-3100P

Technical Specifications

Ticket Printer

Printing Method

Thermal line

Data Transfer System

Asynchronous

Baud Rate

9600 bps (fixed)

Printing Speed

Approx. 50mm/second

Number of columns

32 columns

Character Structure

12 x 24 (alphanumeric)

Line pitch

1/6 inch (4.23mm)

Detector

Paper end, Thermal head up

Paper

Single-ply thermal paper roll

Paper Roll

57.5 +/- 0.5 (Width) x 60 or 80 (Diameter) mm

Reliability

6,000,000 lines

Host Interface

RS-232C

LED Indicators

- Power
- Print

Function Buttons

- Print (to print slip)
- Feed (to feed paper)

Physical & Environmental

Power Supply

- 10VDC, 3A
- Through external power adapter

Weight

613 grams (device only, without paper roll or power adapter)

Dimensions

122 (W) x 200 (D) x 117 (H) mm (device only)

Operating Temperature


0° to 40°C

Storage Temperature

-20° to 60°C

EMI

- FCC Class B
- CE Class B
- C-tick

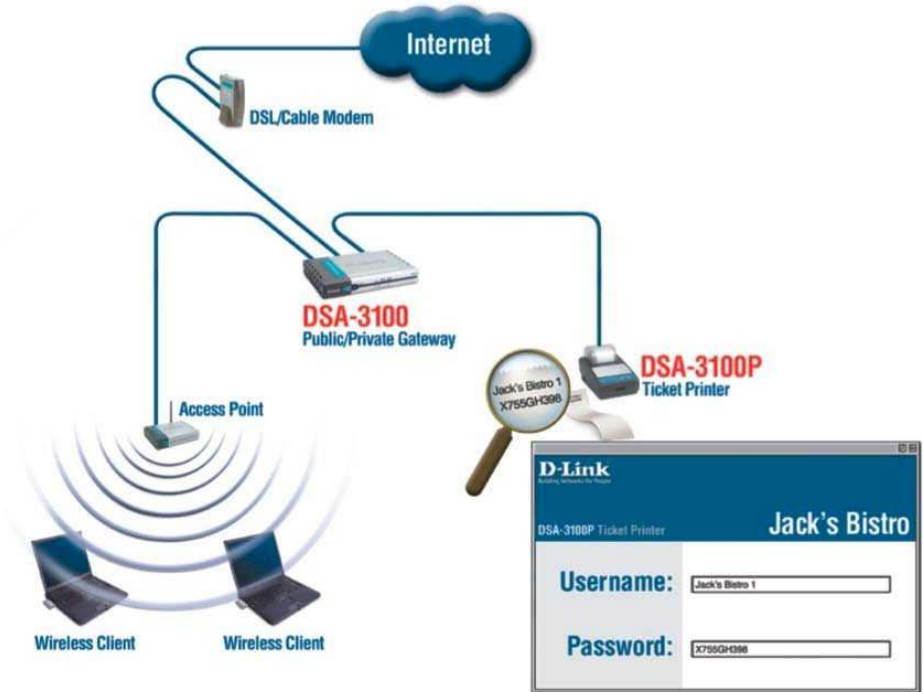

ACN 052 202 838

Ordering Information

DSA-3100P

AirSpot Ticket Printer

D-Link®

Specifications subject to change without prior notice.
D-Link is a registered trademark and AirSpot is a trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A
Canada
Europe
Germany
France
Benelux
Italy
Iberia
Sweden
Norway
Denmark
Finland
Singapore
Australia
Japan
China
India
Middle East (Dubai)
Turkey
Egypt
Israel
Latinamerica
Brasil
South Africa
Russia
Taiwan
D-Link Corp.

TEL: 1-714-885-6000
TEL: 1-905-8295033
TEL: 44-20-8731-5555
TEL: 49-6196-77990
TEL: 33-1-30238688
TEL: 31-10-282-1445
TEL: 39-2-2900-0676
TEL: 34-93-4090770
TEL: 46-(0)8564-61900
TEL: 47-22-309075
TEL: 45-43-969040
TEL: 358-9-2707-5080
TEL: 65-6774-6233
TEL: 61-2-8899-1800
TEL: 81-3-5434-9678
TEL: 86-10-8518-2533
TEL: 91-022-652-6696
TEL: 9714-8834234
TEL: 90-212-335-2553
TEL: 202-414-4295
TEL: 972-9-9715700
TEL: 56-2-232-3185
TEL: 55-11-55039320
TEL: 27(0)1266-52165
TEL: 7-095-744-0099
TEL: 886-2-2910-2626
TEL: 886-2-2916-1600

FAX: 1-866-743-4905
FAX: 1-905-8295223
FAX: 44-20-8731-5511
FAX: 49-6196-7799300
FAX: 33-1-30238689
FAX: 31-10-282-1331
FAX: 39-2-2900-1723
FAX: 34-93-4910795
FAX: 46-(0)8564-61901
FAX: 47-22-309085
FAX: 45-43-424347
FAX: 358-9-2707-5081
FAX: 65-6774-6322
FAX: 61-2-8899-1868
FAX: 81-3-5434-9868
FAX: 86-10-8518-2250
FAX: 91-022-652-8914
FAX: 9714-8834394
FAX: 90-212-335-2500
FAX: 202-415-6704
FAX: 972-9-9715601
FAX: 56-2-232-0923
FAX: 55-11-55039321
FAX: 27(0)1266-52186
FAX: 7-095-744-0099#350
FAX: 886-2-2910-1515
FAX: 886-2-2914-6299



RECYCLABLE
Rev. 01 (Jan. 2004)