


### Configure VLAN on DWL-3260AP, DWL-3200AP and DWL-8200AP.


Log in to the units web configuration page. Default IP is 192.168.0.50

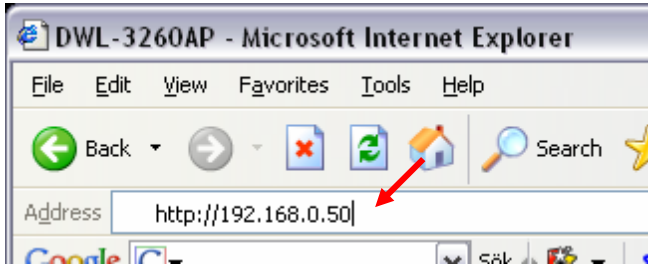

In the menu on your left, go to “Advanced Settings” > “Multi-SSID”

First you need to enable Multi-SSID and VLAN State.

Choose “Multi-SSID 1” in the drop down menu. Give your wireless network a name (SSID2).  
Type in the VLAN ID (99).

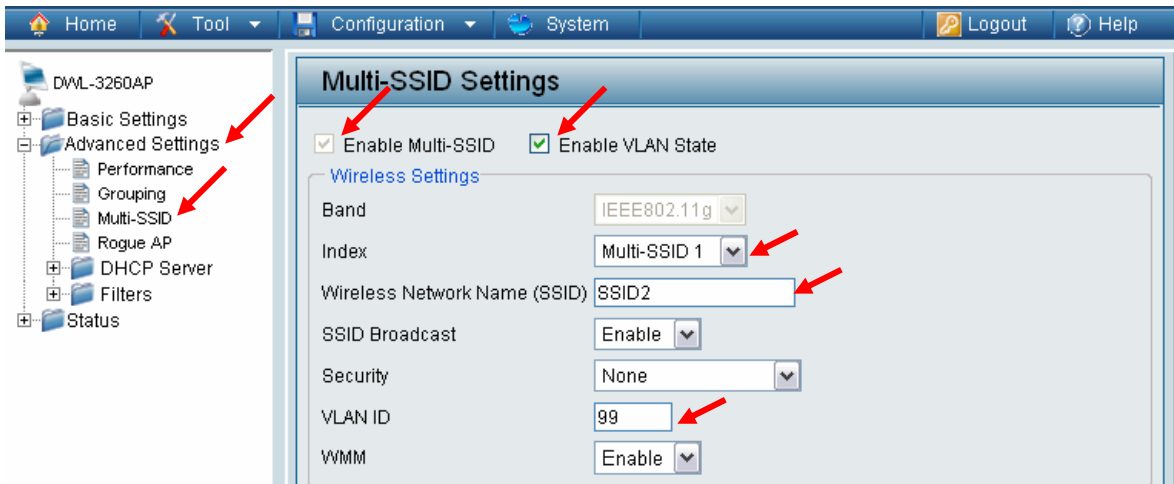

Click “Apply” and remember to save settings in the tool menu.

