



WIRELESS G USB ADAPTER

CONNECT TO THE INTERNET

Easily connect to your wireless network to get online from your desktop or notebook PC



BASIC NETWORKING

Check e-mail, surf the web and chat with friends and family online



WI-FI PROTECTED SETUP

Simplify the process of connection to your wireless network



BASIC WIRELESS CONNECTIVITY

Connect to your wireless network from your desktop or notebook PC using the DWL-G122 Wireless G USB Adapter and browse the web, check e-mail, and chat with friends and family online. The Wireless G USB Adapter offers simple network connectivity without the hassle of running a network cable.

SECURE WIRELESS NETWORKING

To protect your data and privacy, the Wireless G USB Adapter supports WEP and WPA encryption for connecting to a secure wireless network.

COMPATIBILITY ASSURANCE

The Wireless G USB Adapter is based on the 802.11g standard and is backwards compatible with 802.11b, ensuring compatibility with a wide range of wireless routers and networks.

EASY TO INSTALL & CONNECT

D-Link's Quick Setup Wizard provides easy setup for this USB adapter. The addition of the Wi-Fi Protected Setup (WPS) function provides advanced security features that remain simple enough for the average user to configure correctly. This function allows for devices to undergo an easy one-time click-button configuration for establishing connection with an access point or wireless router without the need of manually setting up complex encryption codes.


WHAT THIS PRODUCT DOES

Connect to your wireless home network by adding a D-Link Wireless G USB 2.0 Adapter to your notebook or desktop computer. Once connected, you can share a high-speed Internet connection while also getting access to shared documents, music, and photos with other computers on your network.

GET CONNECTED, STAY CONNECTED

Set up your new D-Link networking hardware in minutes using our new Quick Setup Wizard. The wizard will guide you through an easy to follow process to install your new hardware and connect to your network. If you need additional help, visit D-Link's award-winning Customer Support Web Site for answers to frequently asked questions, product downloads, and easy access to D-Link's friendly customer support team.

YOUR NETWORK SETUP

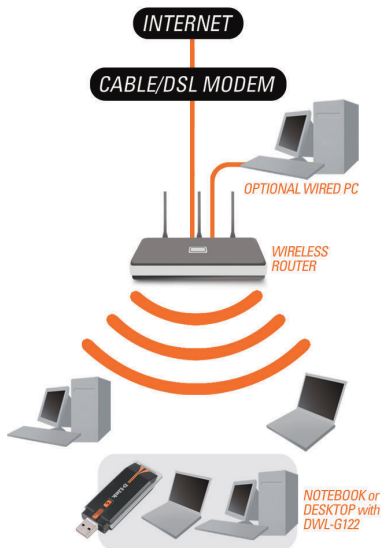

SEE ADDITIONAL PRODUCTS BELOW
WIRELESS ADAPTER REQUIRED

TECHNICAL SPECIFICATIONS

SYSTEM REQUIREMENTS

- Windows 2000 (SP4), XP (SP3), or Vista (32bit/64bit)
- CD-ROM drive
- 20MB hard disk space
- Available USB port

STANDARDS

- IEEE 802.11g
- IEEE 802.11b
- USB 2.0

FREQUENCY RANGE

- 2.4GHz to 2.4835GHz

ANTENNA

- Integrated Antenna

SECURITY

- 64/128-bit WEP data encryption
- Wi-Fi Protected Access (WPA/WPA2-PSK, WPA/WPA2-EAP)
- Wi-Fi Protected Setup (WPS)
- PBC/PIN

OPERATING VOLTAGE

5VDC +/- 5%

DIAGNOSTIC LED

- Link/Activity

DIMENSIONS

88.5 x 28 x 12 mm
(3.5 x 1.1 x 0.5 inches)

OPERATING TEMPERATURE

0° to 40° C (32° to 104° F)

STORAGE TEMPERATURE

-20° to 65° C (-4° to 149° F)

OPERATING HUMIDITY

10% to 90% non-condensing

STORAGE HUMIDITY

5% to 95% non-condensing

CERTIFICATIONS

- CE
- Wi-Fi
- WPS Certified



D-Link Corporation
No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2009 D-Link Corporation. All rights reserved.
Release 01 (June 2009)