

How do I setup and install my DIR-857?

Step 1 – Unplug your cable/DSL modem.


Step 2 – Connect an ethernet cable from your computer to one of the 4 (blue) LAN ports on the DIR-857.

Step 3 – Connect your cable/DSL modem to the Internet (yellow) ports on the DIR-857


Step 4 – Plug in the power cable for your cable/DSL modem and wait for 1-2 minutes.

Step 5 – Power on your cable/DSL modem and the DIR-857.

Step 6 – Open your web browser and enter <http://dlinkrouter> or <http://dlinkrouter.local> or <http://192.168.0.1> into the address bar.




Step 7 – Click the “Log In” button, there is no password set by default.

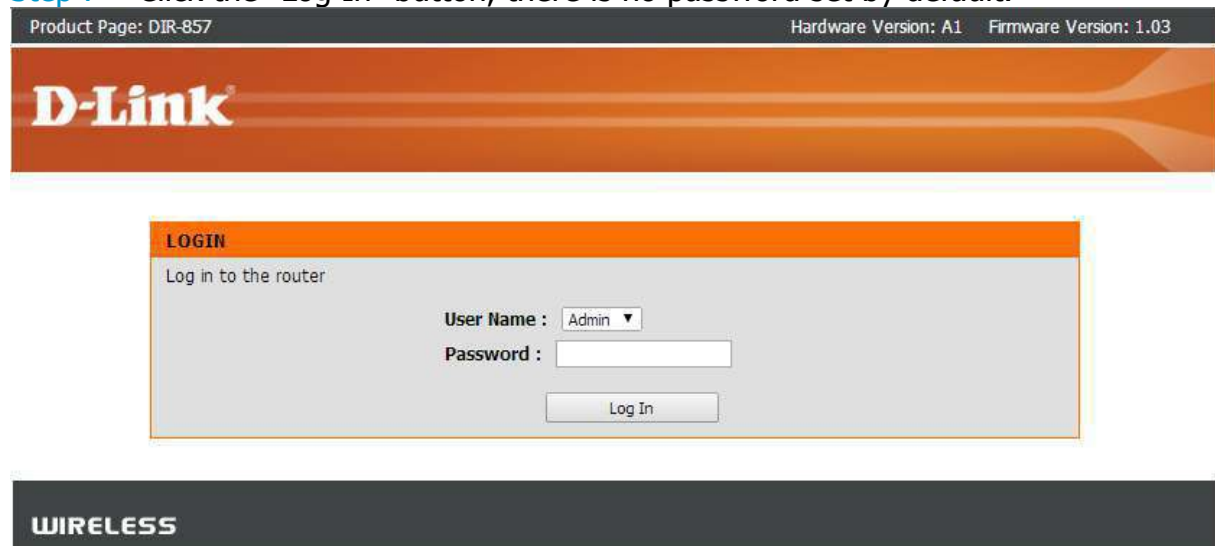


How do I setup and install my DIR-857?


Step 8 – The Setup Wizard should start automatically, this will guide you through a step-by-step process to configure your DIR-857. Click “Next” to continue.

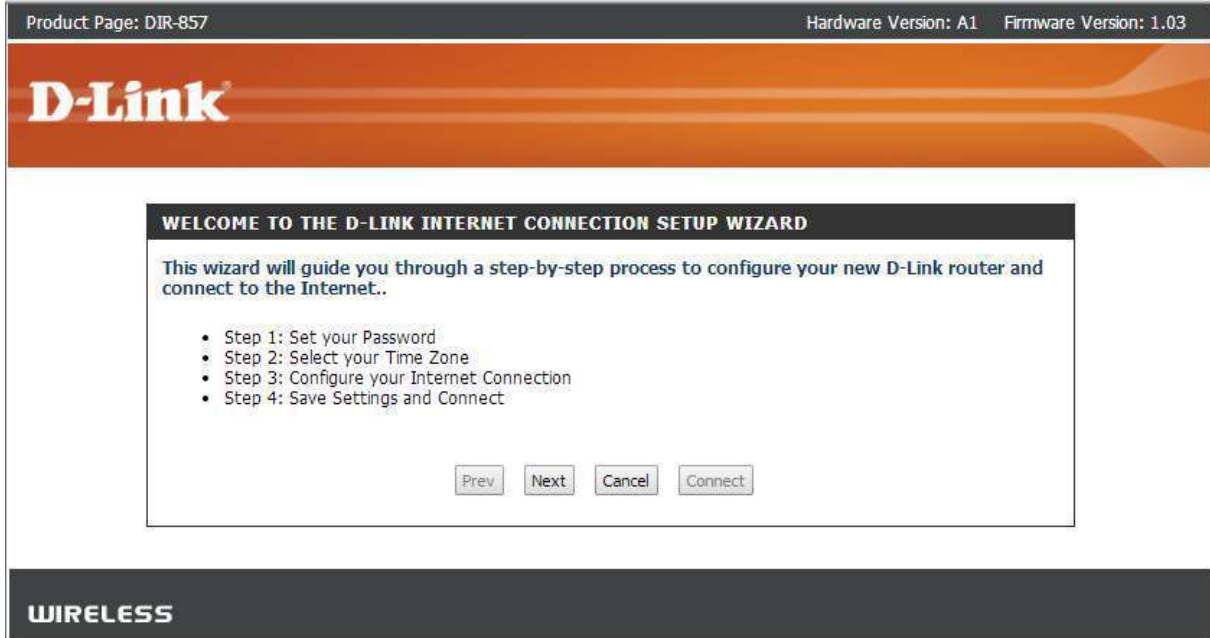

Step 9 – The first step is to set an administrator password for the device. We suggest something that is easy for you to remember but not too easy that others can guess the password. Once you have entered your password, click “Next” to continue.

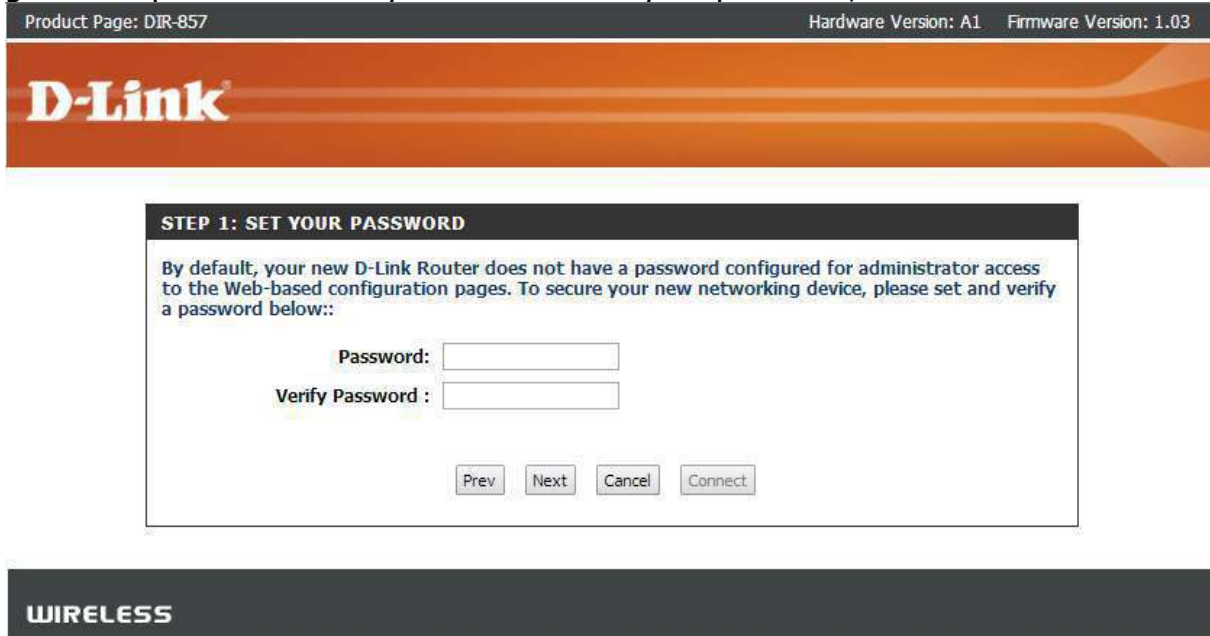

Step 10 – Step 2 is to set the correct Timezone.

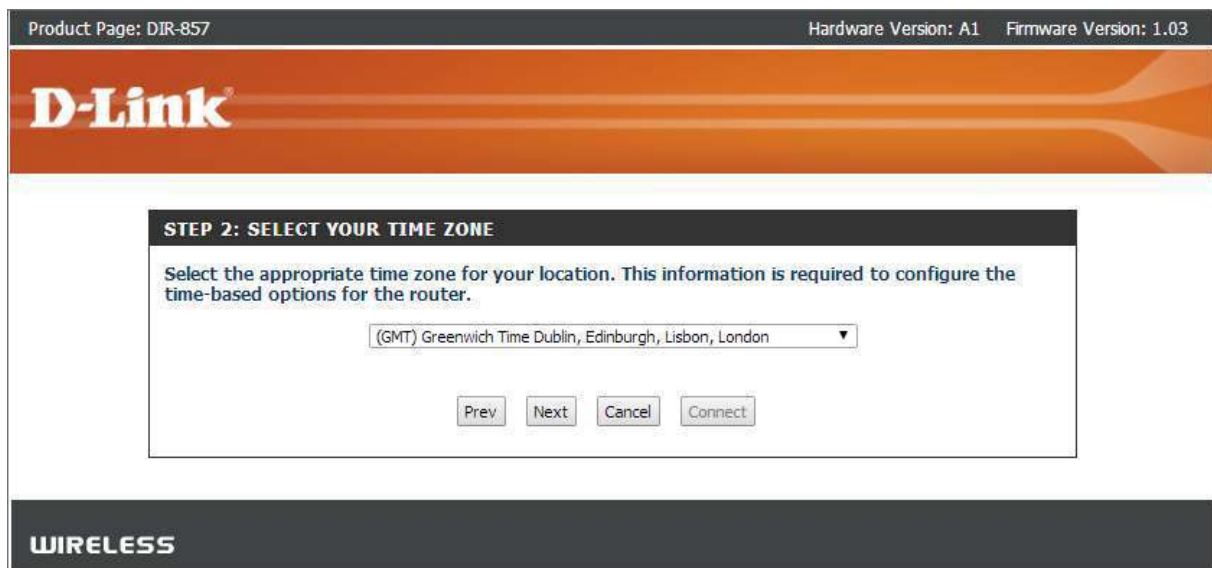


Step 11 – Step 3 is where you configure your internet connection type. If you are unsure as to what type of connection you need to select, as well as your username and password, please speak to your Internet Service Provider (ISP). Once you have the information, you can select the correct type of connection.

Typically you will select "DHCP Connection" if you have a cable connection, this typically does not require a username or password.

If you have an ADSL connection, you would typically select "Username / Password Connection (PPPoE)".

For DHCP Connection, go to Step 12.

For PPPoE Connection, please skip to Step 13.

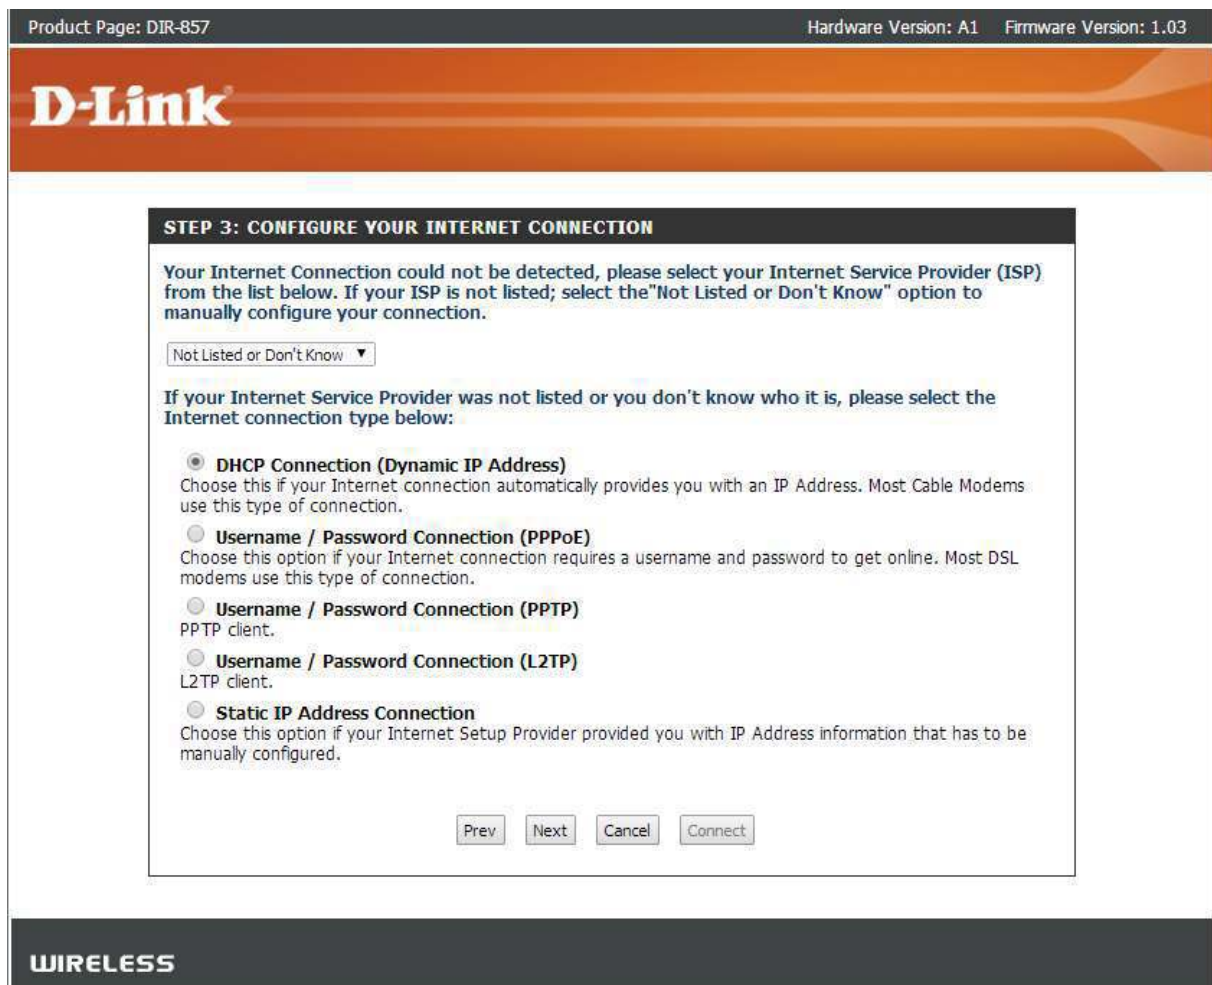

Step 12 – If you have a DHCP connection, you will be shown a screen as below.

How do I setup and install my DIR-857?

Product Page: DIR-857 Hardware Version: A1 Firmware Version: 1.03

DHCP CONNECTION (DYNAMIC IP ADDRESS)

To set up this connection, please make sure that you are connected to the D-Link Router with the PC that was originally connected to your broadband connection. If you are, then click the Clone MAC button to copy your computer's MAC Address to the D-Link Router.

MAC Address: (optional)

Host Name:

Note: You may also need to provide a Host Name. If you do not have or know this information, please contact your ISP.

DNS SETTINGS

Primary DNS Address :
Secondary DNS Address :

WIRELESS

Ensure you fill in all the information required by your ISP, then click "Next". Your connection setup is now complete. You can now click "Connect" to get your DIR-857 to begin your internet connection.

Product Page: DIR-857 Hardware Version: A1 Firmware Version: 1.03

SETUP COMPLETE!

The Internet Connection Setup Wizard has completed. Click the Connect button to save your settings and reboot the router.

WIRELESS

Step 13 – If you have a PPPoE connection, you will see a screen as below. Ensure you fill in all of the information provided to you by your ISP before clicking "Next".



SET USERNAME AND PASSWORD CONNECTION (PPPOE)

To set up this connection you will need to have a Username and Password from your Internet Service Provider. If you do not have this information, please contact your ISP.

Address Mode : Dynamic IP Static IP

IP address :

User Name :

Password :

Verify Password :

Service Name : (optional)

Note: You may also need to provide a Service Name. If you do not have or know this information, please contact your ISP.

DNS SETTINGS

Primary DNS Address :

Secondary DNS Address :

WIRELESS

Your connection setup is now complete. You can now click "Connect" to get your DIR-857 to begin your internet connection.



SETUP COMPLETE!

The Internet Connection Setup Wizard has completed. Click the Connect button to save your settings and reboot the router.

WIRELESS