

# 8 Megapixel H.265 Outdoor Bullet Camera

High-definition professional surveillance and security solution, suitable for small, medium, and large enterprises.

**DCS-4718E**

- 1/2.5" 8 Megapixel progressive CMOS sensor
- Resolution of up to 3840 x 2160 at 20 fps
- H.265, H.264 and MJPEG codec support
- Wide Dynamic Range (WDR) image enhancement
- LowLight+ for superior low light performance
- Supports 2D/3D noise reduction
- Motion detection, corridor mode, and privacy mask
- Motorised vari-focal 3.3 mm - 12 mm lens with an F1.4 aperture
- Up to 30 m night vision with built-in IR LED illuminator
- 10/100 Base-TX Fast Ethernet port with PoE (Power over Ethernet) ensures easy integration into your network
- IP66 compliant housing allows for installation in a wide range of climates, from -30 °C to 50 °C
- microSD card slot for local recording
- ONVIF Profile S compliant
- Automatic firmware update option
- The adjustable mount allows the camera to be positioned easily
- Supports D-Link's free D-ViewCam™ suite of management software



### IP66 Compliant

Water-resistant and dust-tight housing with an operating temperature range of -30 to 50 °C



### LowLight+

Optimised for increased image quality in low-light environments



### 30 Metre Night Vision

See up to 30 metres in the dark with built-in IR illumination



### Wide Dynamic Range

Improved image quality in high-contrast conditions with WDR



### PoE Capable

Supports 802.3af PoE for flexible and simple installation



### microSD Card<sup>1</sup>

Equipped with a microSD card slot for local storage

**Camera**

Camera Hardware Profile

1/2.5" 8-megapixel progressive CMOS sensor  
 30 metre IR illumination distance  
 Minimum illumination:  
 Color: 0.02 lux @(F1.4, AGC ON)  
 B/W: 0 lux @(IR LED ON)  
 Built-in Infrared-Cut Removable (ICR) Filter module  
 18x digital zoom  
 Minimum object distance 0.5 m  
 Focal length: 3.3 - 12 mm  
 Aperture: F1.4  
 Angle of view:  
 (H) 108.6° - 35°  
 (V) 56° - 21°  
 (D) 125° - 42°

Camera Housing

IP66 certified weatherproof housing  
 Wire-in bracket

Image Features

Configurable image size/quality/frame rate/bit rate  
 Time stamp and text overlays  
 Configurable shutter speed/brightness/saturation/contrast/sharpness/3D filter  
 Configurable motion detection area  
 Configurable privacy mask zones  
 Auto White Balance (AWB)  
 Auto Gain Control (AGC)  
 Wide Dynamic Range (WDR)  
 LowLight+  
 Corridor mode

Video Compression

Simultaneous H.265/H.264/MJPEG format compression  
 JPEG for still images

Max. Video Resolution and Frame Rate

3840 x 2160 at 20 fps


External Device Interfaces

microSD card slot<sup>1</sup>  
 Reset button  
 10/100 Base-TX Fast Ethernet port (supports 802.3af PoE Class 3)

**Network**

Network Protocols

IPv4  
 HTTP/HTTPS  
 RTSP/RTP/RTCP  
 TCP  
 UDP  
 DHCP  
 DNS  
 DDNS  
 NTP  
 FTP  
 SMTP Client  
 ONVIF Profile S compliant  
 ARP  
 ICMP  
 PPPoE  
 SNMP v1/v2c/v3

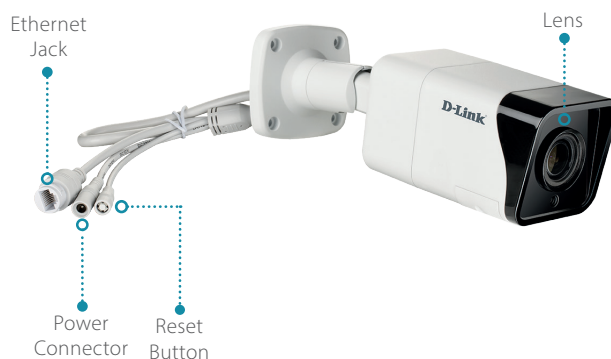

## System Management

Event Management	Motion detection Multiple event notifications Event notification and uploading of snapshots via e-mail or FTP Event video recording via microSD card, D-ViewCam, D-Link NVR or ONVIF-compliant NAS
Remote Management	Remote management via D-ViewCam software Remotely take snapshots/video clips and save to a local hard drive Configuration interface accessible via a web browser
System Requirements for Web Interface	Operating System: Microsoft Windows Browser: Internet Explorer 11 for full function; Chrome and Firefox (MJPEG only)
D-ViewCam System Requirements	Operating System: Windows 10 Protocol: Standard TCP/IP
D-ViewCam Software Functions	Supports all management functions provided in the web interface Scheduled motion trigger or manual recording options Remote management of up to 64 cameras Viewing of up to 64 cameras on one screen

## General

Weight	700 g
External Power Adapter (not included)	100 to 240 V AC, 50/60 Hz (Input), 12 V DC 1.5 A (Output)
Power Consumption	8 W ± 5% (PoE)
Operating Temperature	-30 to 50 °C
Storage Temperature	-20 to 70 °C
Operating/Storage Humidity	Max. 90% non-condensing
Dimension	232 x 74 x 80 mm
Certifications	CE, FCC, RCM

<sup>1</sup> microSD card not included. Supports capacity up to 256 GB.

